

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: PORTFOLIO

Report Number: P249653

Luminaire Tested: **LD8B175D010 ER8B175927 8LBS0GPH**

Issue Date: 03/03/2020

Test Information

Test Method: LM-79-08
Report Number: P249653
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-1801-521-95)
Test Lab: INNOVATION CENTER(G1)
Issue Date: 03/03/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LD8B175D010 ER8B175927 8LBS0GPH
Description: PORTFOLIO 8 INCH WIDE SHALLOW DISTRIBUTION 75 DEGREE CUTOFF RECESSED
DOWNLIGHT
97 CRI 2700 CCT WITH GRAPHITE TRIM
Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 14287.5 lumens
Efficiency: N/A
Efficacy: 80.6 lumens/watt
Spacing Criteria (0/90/45): 1.18 / 1.18 / 1.22
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 177.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P249653

CATALOG NUMBER: LD8B175D010 ER8B175927 8LBS0GPH

Luminous Intensity Polar Plot

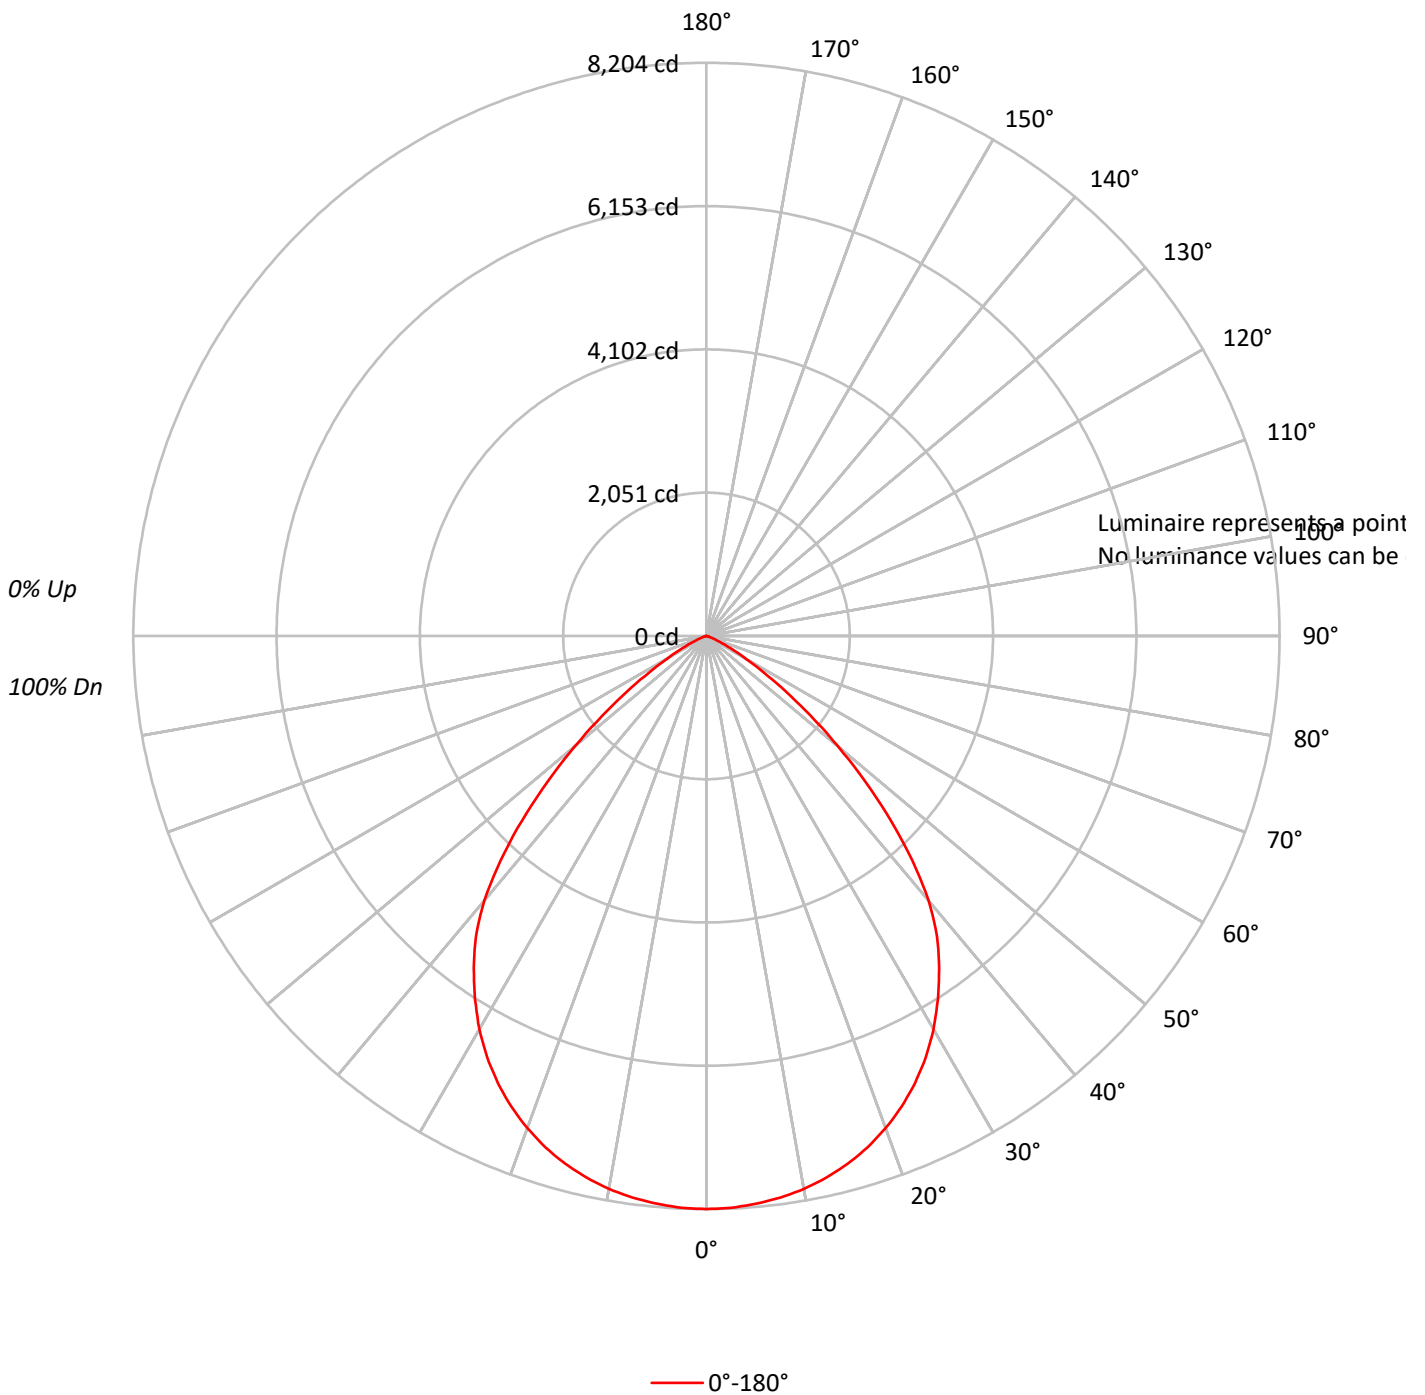



TEST NUMBER: P249653

CATALOG NUMBER: LD8B175D010 ER8B175927 8LBS0GPH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	112	109	106	103	110	107	104	101	102	100	98	99	97	95	95	94	93	91
2	105	99	94	90	102	97	92	89	94	90	87	91	87	85	88	85	83	81
3	98	90	84	79	96	88	83	78	85	81	77	83	79	75	81	77	74	72
4	91	82	75	69	89	80	74	69	78	73	68	76	71	67	74	70	66	65
5	85	75	67	62	83	73	67	62	72	66	61	70	64	60	68	63	60	58
6	79	68	61	56	78	67	60	55	66	59	55	64	59	54	63	58	54	52
7	74	63	55	50	73	62	55	50	61	54	50	59	54	49	58	53	49	47
8	69	58	51	45	68	57	50	45	56	50	45	55	49	45	54	49	45	43
9	65	54	46	42	64	53	46	41	52	46	41	51	45	41	50	45	41	39
10	61	50	43	38	60	49	43	38	48	42	38	47	42	38	47	41	38	36

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P249653

CATALOG NUMBER: LD8B175D010 ER8B175927 8LBS0GPH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	775.0	5.4
10°-20°	2203.5	15.4
20°-30°	3244.9	22.7
30°-40°	3612.9	25.3
40°-50°	2853.4	20.0
50°-60°	1279.3	9.0
60°-70°	282.4	2.0
70°-80°	31.8	0.2
80°-90°	4.2	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	6223.4	43.6
0°-40°	9836.3	68.8
0°-60°	13969.1	97.8
0°-90°	14287.5	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	14287.5	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	8204	
5°	8159	775
15°	7821	2203
25°	7064	3245
35°	5808	3613
45°	3729	2853
55°	1381	1279
65°	248	282
75°	26	32
85°	3	4
90°	0	



TEST NUMBER: P249653

CATALOG NUMBER: LD8B175D010 ER8B175927 8LBS0GPH

CANDELA DISTRIBUTION (FULL):

0°	
0°	8204.4
2.5°	8192.0
5°	8159.3
7.5°	8108.9
10°	8037.2
12.5°	7940.8
15°	7820.6
17.5°	7673.7
20°	7497.8
22.5°	7295.3
25°	7064.4
27.5°	6798.3
30°	6502.8
32.5°	6164.1
35°	5807.7
37.5°	5424.8
40°	4950.8
42.5°	4364.4
45°	3728.6
47.5°	3081.2
50°	2452.4
52.5°	1877.5
55°	1381.4
57.5°	964.9
60°	646.5
62.5°	409.5
65°	247.6
67.5°	137.9
70°	68.1
72.5°	37.1
75°	25.6
77.5°	18.6
80°	11.5
82.5°	6.2
85°	2.7
87.5°	0.9
90°	0.0

(END OF REPORT)