

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: PORTFOLIO

Report Number: P247869

Luminaire Tested: **LD8B175D010 ER8B1759727 8LBM0LI**

Issue Date: 03/03/2020

Test Information

Test Method: LM-79-08
Report Number: P247869
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-1801-521-90)
Test Lab: INNOVATION CENTER(G1)
Issue Date: 03/03/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LD8B175D010 ER8B1759727 8LBM0LI
Description: PORTFOLIO 8 INCH MEDIUM DISTRIBUTION 55 DEG CUTOFF RECESSED
DOWNLIGHT
97 CRI 2700 CCT WITH SPECULAR CLEAR TRIM
Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 13050.0 lumens
Efficiency: N/A
Efficacy: 73.6 lumens/watt
Spacing Criteria (0/90/45): 0.7 / 0.7 / 0.76
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 177.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P247869

CATALOG NUMBER: LD8B175D010 ER8B1759727 8LBM0LI

Luminous Intensity Polar Plot

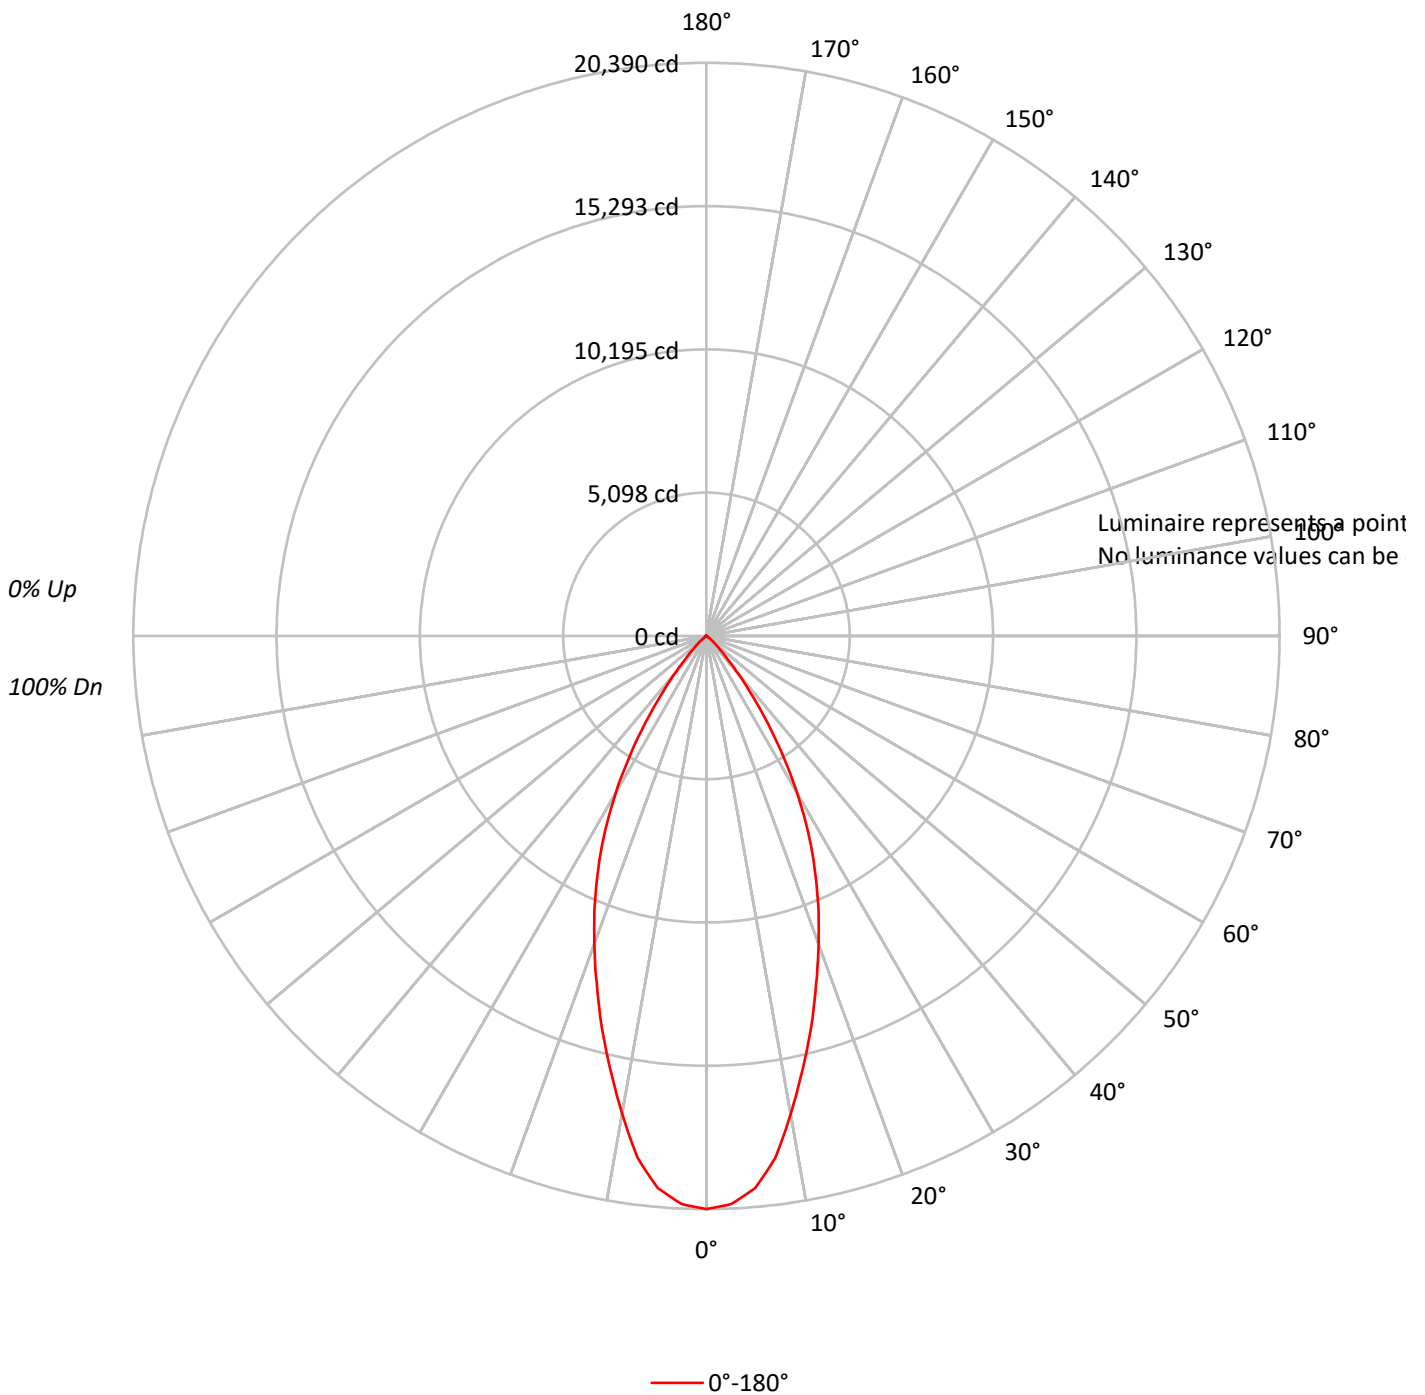



TEST NUMBER: P247869

CATALOG NUMBER: LD8B175D010 ER8B1759727 8LBM0LI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	114	111	109	107	111	109	107	105	105	103	102	101	100	99	98	97	96	94
2	109	104	100	97	106	102	99	96	99	96	94	96	94	92	93	91	90	88
3	103	97	93	89	102	96	92	88	93	90	87	91	88	85	89	86	84	83
4	99	91	86	82	97	90	86	82	88	84	81	86	83	80	84	81	79	78
5	94	86	81	77	92	85	80	76	83	79	76	82	78	75	80	77	74	73
6	90	81	76	72	88	80	75	71	79	74	71	78	73	70	76	73	70	68
7	86	77	71	67	84	76	71	67	75	70	67	74	69	66	73	69	66	65
8	82	73	67	63	80	72	67	63	71	66	63	70	66	62	69	65	62	61
9	78	69	63	60	77	68	63	59	68	63	59	67	62	59	66	62	59	58
10	75	66	60	56	74	65	60	56	64	59	56	64	59	56	63	59	56	55

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P247869

CATALOG NUMBER: LD8B175D010 ER8B1759727 8LBM0LI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	1804.4	13.8
10°-20°	4002.6	30.7
20°-30°	4134.7	31.7
30°-40°	2410.5	18.5
40°-50°	604.0	4.6
50°-60°	73.2	0.6
60°-70°	15.3	0.1
70°-80°	2.0	0.0
80°-90°	3.2	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	9941.8	76.2
0°-40°	12352.3	94.7
0°-60°	13029.5	99.8
0°-90°	13050.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	13050.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	20390	
5°	19730	###
15°	14390	4003
25°	9092	4135
35°	3812	2410
45°	686	604
55°	62	73
65°	10	15
75°	2	2
85°	0	3
90°	0	



TEST NUMBER: P247869

CATALOG NUMBER: LD8B175D010 ER8B1759727 8LBM0LI

CANDELA DISTRIBUTION (FULL):

	0°
0°	20390.0
2.5°	20231.9
5°	19729.6
7.5°	18740.6
10°	17261.1
12.5°	15795.8
15°	14390.2
17.5°	12979.9
20°	11656.0
22.5°	10384.0
25°	9091.6
27.5°	7806.3
30°	6456.5
32.5°	5124.8
35°	3812.0
37.5°	2678.4
40°	1755.4
42.5°	1106.1
45°	685.5
47.5°	418.2
50°	225.6
52.5°	110.1
55°	62.1
57.5°	33.8
60°	29.1
62.5°	20.4
65°	10.2
67.5°	12.6
70°	8.6
72.5°	0.0
75°	1.6
77.5°	0.8
80°	1.6
82.5°	2.4
85°	0.0
87.5°	8.6
90°	0.0

(END OF REPORT)