

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: PORTFOLIO

Report Number: P250111

Luminaire Tested: **LD8B175D010 ER8B1759727 8LBN0WH**

Issue Date: 03/03/2020

Test Information

Test Method: LM-79-08
Report Number: P250111
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P13946)
Test Lab: INNOVATION CENTER-P1
Issue Date: 03/03/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LD8B175D010 ER8B1759727 8LBN0WH
Description: PORTFOLIO 8 INCH NARROW DISTRIBUTION 50 DEGREE CUTOFF RECESSED
DOWNLIGHT
97 CRI 2700 CCT WITH WHEAT TRIM
Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 11492.9 lumens
Efficiency: N/A
Efficacy: 64.9 lumens/watt
Spacing Criteria (0/90/45): 0.58 / 0.58 / 0.66
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 177.2
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P250111

CATALOG NUMBER: LD8B175D010 ER8B1759727 8LBN0WH

Luminous Intensity Polar Plot

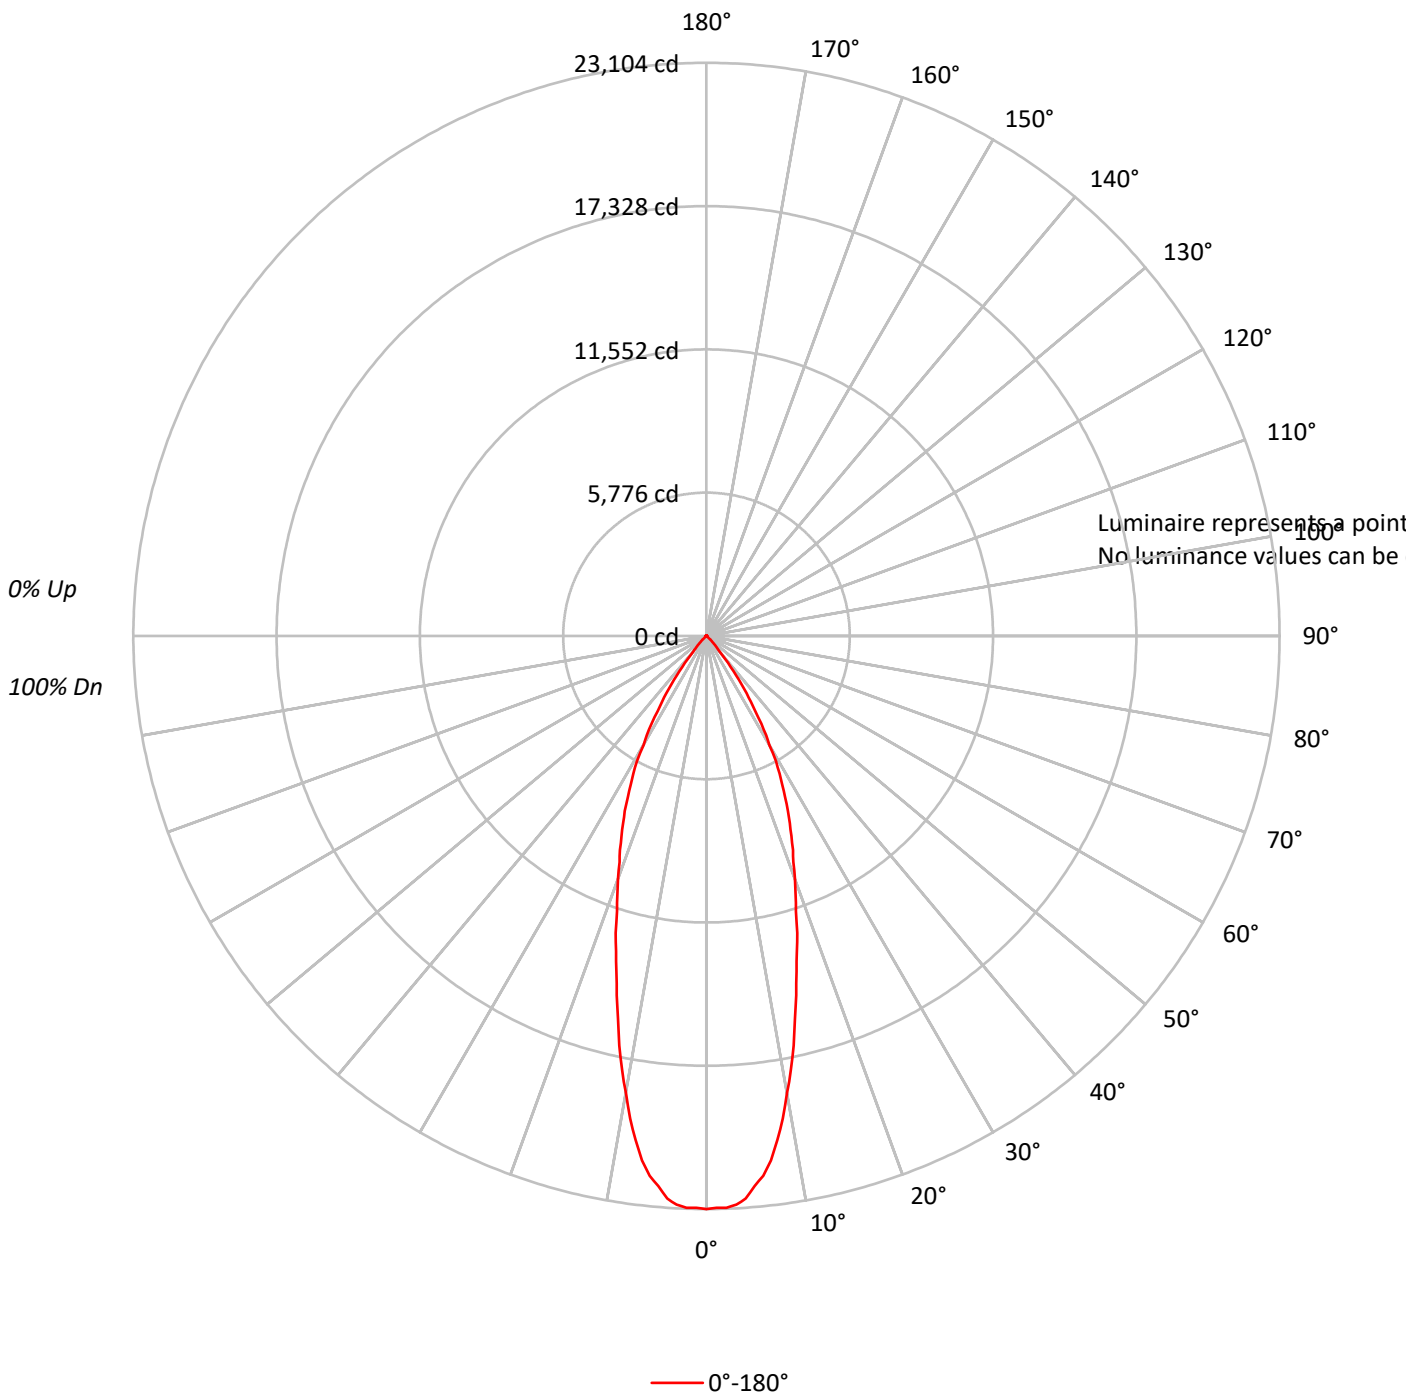



TEST NUMBER: P250111

CATALOG NUMBER: LD8B175D010 ER8B1759727 8LBN0WH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	114	112	109	107	112	109	107	106	105	104	102	102	100	99	98	97	96	95
2	109	105	101	98	107	103	100	97	100	97	95	97	95	93	94	93	91	89
3	105	99	94	91	103	97	93	90	95	91	89	92	90	87	90	88	86	85
4	100	93	88	85	98	92	88	84	90	86	83	88	85	82	86	84	81	80
5	96	88	83	79	94	87	83	79	86	82	78	84	81	78	83	80	77	76
6	92	84	79	75	90	83	78	74	82	77	74	80	76	74	79	76	73	72
7	88	80	74	71	87	79	74	70	78	73	70	77	73	70	76	72	69	68
8	84	76	71	67	83	75	70	67	74	70	67	73	69	66	72	69	66	65
9	81	72	67	64	80	72	67	64	71	66	63	70	66	63	69	66	63	62
10	78	69	64	61	77	69	64	61	68	63	60	67	63	60	67	63	60	59

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P250111

CATALOG NUMBER: LD8B175D010 ER8B1759727 8LBN0WH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	2017.8	17.6
10°-20°	3910.0	34.0
20°-30°	3520.2	30.6
30°-40°	1741.7	15.2
40°-50°	264.9	2.3
50°-60°	10.9	0.1
60°-70°	14.0	0.1
70°-80°	5.3	0.0
80°-90°	8.2	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	9448.0	82.2
0°-40°	11189.7	97.4
0°-60°	11465.5	99.8
0°-90°	11492.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	11492.9	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	23104	
5°	22258	###
15°	14008	3910
25°	7784	3520
35°	2819	1742
45°	293	265
55°	4	11
65°	8	14
75°	8	5
85°	12	8
90°	0	



TEST NUMBER: P250111

CATALOG NUMBER: LD8B175D010 ER8B1759727 8LBN0WH

CANDELA DISTRIBUTION (FULL):

0°	
0°	23103.7
1°	23055.6
2°	23067.5
3°	22951.2
4°	22738.8
5°	22257.5
6°	21888.6
7°	21303.1
8°	20517.1
9°	19698.9
10°	18712.3
11°	17830.1
12°	16883.7
13°	15836.9
14°	14934.6
15°	14008.1
16°	13218.1
17°	12520.4
18°	11662.1
19°	11032.4
20°	10415.0
21°	9773.2
22°	9304.0
23°	8758.6
24°	8257.3
25°	7784.1
26°	7226.6
27°	6725.4
28°	6276.2
29°	5782.9
30°	5073.1
31°	4672.1
32°	4166.8
33°	3613.3
34°	3192.2
35°	2819.2
37.5°	1784.5
40°	806.1
42.5°	549.4
45°	292.7
47.5°	164.4
50°	4.0
52.5°	16.1
55°	4.0
57.5°	24.1



TEST NUMBER: P250111

CATALOG NUMBER: LD8B175D010 ER8B1759727 8LBN0WH

CANDELA DISTRIBUTION (continued):

	0°
60°	4.0
62.5°	20.1
65°	8.0
67.5°	20.1
70°	12.1
72.5°	4.0
75°	8.0
77.5°	0.0
80°	4.0
82.5°	16.1
85°	12.1
87.5°	0.0
90°	0.0

(END OF REPORT)