

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions  
(formerly Eaton)

Brand: PORTFOLIO

Report Number: P246470

Luminaire Tested: **LD8B20D010 ER8B20830 8LBS0B**

Issue Date: 03/03/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P246470  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-1801-521-17)  
Test Lab: INNOVATION CENTER(G1)  
Issue Date: 03/03/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: PORTFOLIO  
Catalog Number: LD8B20D010 ER8B20830 8LBS0B  
Description: PORTFOLIO 8 INCH WIDE SHALLOW DISTRIBUTION 75 DEGREE CUTOFF RECESSED  
DOWNLIGHT  
80 CRI 3000 CCT WITH SPECULAR BLACK TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 1930.0 lumens  
Efficiency: N/A  
Efficacy: 90.6 lumens/watt  
Spacing Criteria (0/90/45): 1.2 / 1.2 / 1.25  
Luminous Opening: Circular (Dia: 0.67' x H: 0')  
CIE Type: Direct


Input Watts (W): 21.3  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P246470

CATALOG NUMBER: LD8B20D010 ER8B20830 8LBS0B

### Luminous Intensity Polar Plot

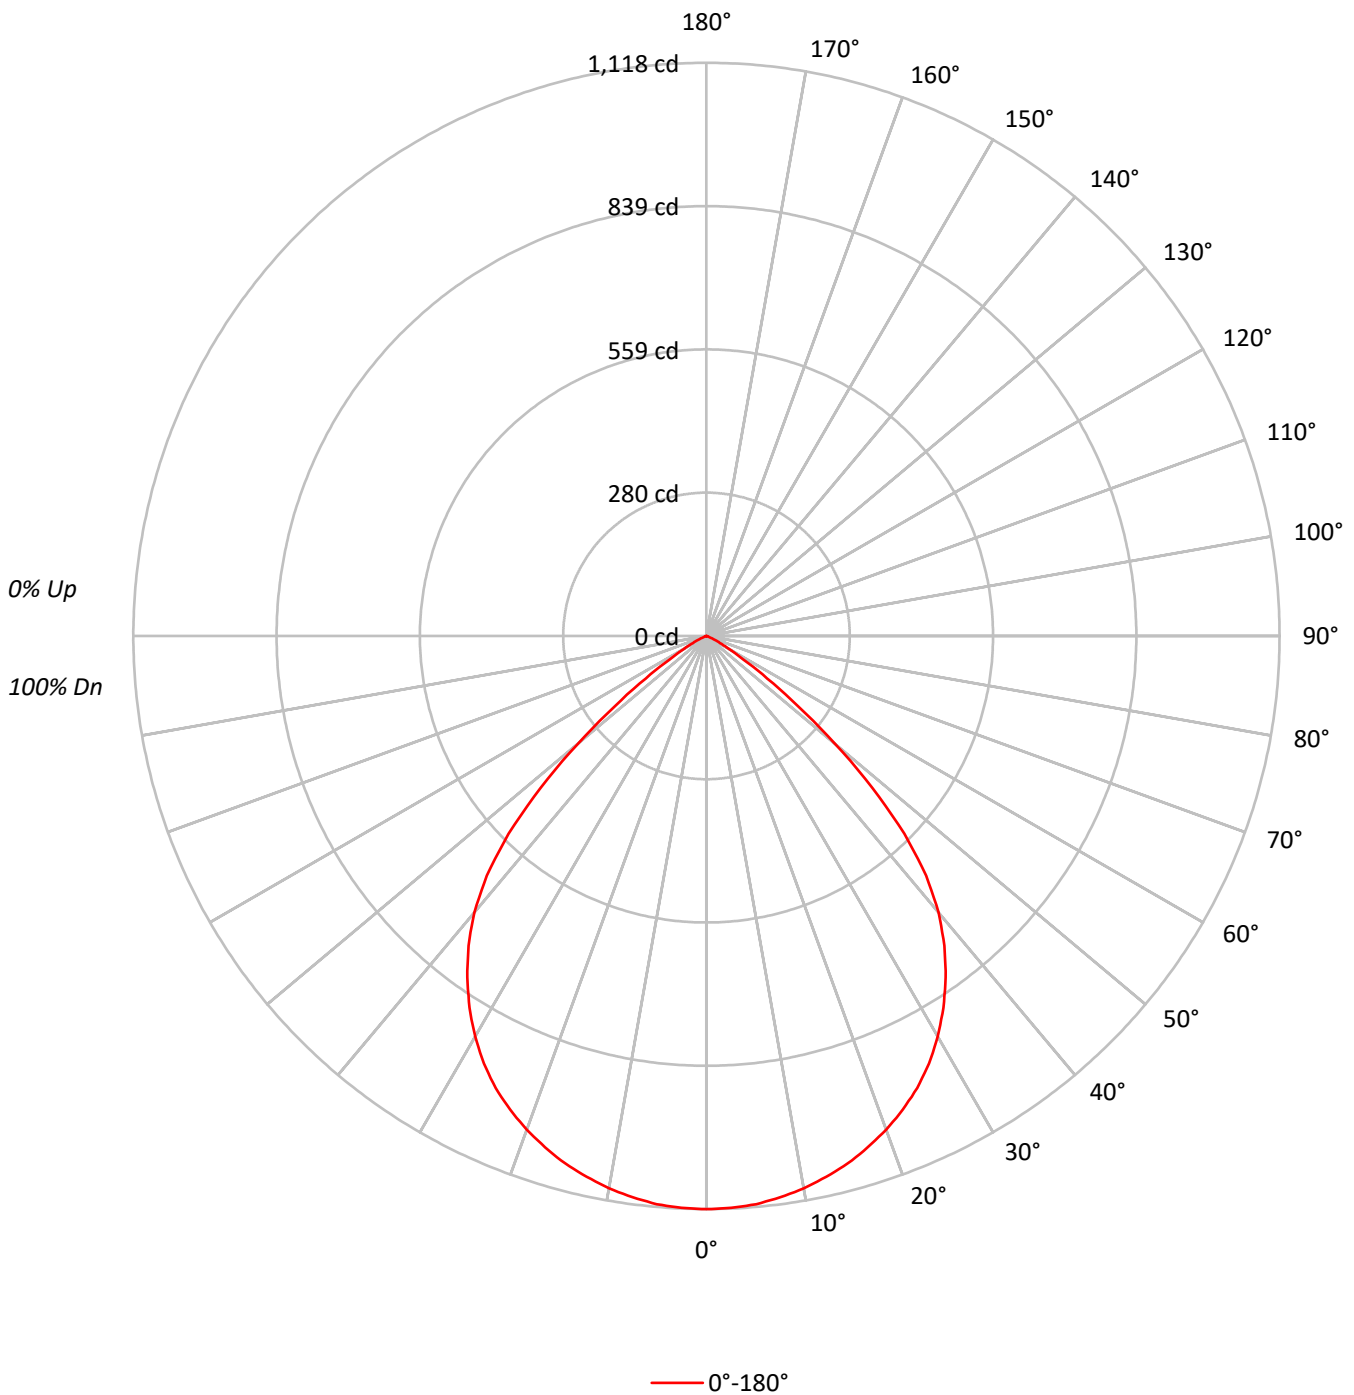



TEST NUMBER: P246470

CATALOG NUMBER: LD8B20D010 ER8B20830 8LBS0B

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	112	109	106	103	110	107	104	102	103	101	99	99	97	96	96	94	93	91
2	105	99	94	90	103	98	93	89	94	90	87	91	88	85	88	86	84	82
3	98	90	84	79	96	89	83	79	86	81	77	84	80	76	81	78	75	73
4	92	82	76	70	90	81	75	70	79	73	69	77	72	68	75	71	67	66
5	86	75	68	63	84	74	68	63	72	66	62	71	65	61	69	64	61	59
6	80	69	62	56	78	68	61	56	67	60	56	65	60	55	64	59	55	53
7	75	63	56	51	73	63	56	51	61	55	51	60	54	50	59	54	50	48
8	70	59	51	46	69	58	51	46	57	50	46	56	50	46	54	49	46	44
9	66	54	47	42	65	54	47	42	53	46	42	52	46	42	51	45	42	40
10	62	50	43	39	61	50	43	39	49	43	39	48	42	38	47	42	38	37

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	34475
5°	34440
10°	34258
15°	34009
20°	33632
25°	33102
30°	32131
35°	30620
40°	28359
45°	23798
50°	15735
55°	7769
60°	3084
65°	1197
70°	189
75°	0
80°	0
85°	0



TEST NUMBER: P246470

CATALOG NUMBER: LD8B20D010 ER8B20830 8LBS0B

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	105.6	5.5
10°-20°	300.3	15.6
20°-30°	447.0	23.2
30°-40°	506.2	26.2
40°-50°	409.3	21.2
50°-60°	142.0	7.4
60°-70°	19.4	1.0
70°-80°	0.3	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	852.8	44.2
0°-40°	1359.1	70.4
0°-60°	1910.4	99.0
0°-90°	1930.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1930.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	1118	
5°	1113	106
15°	1065	300
25°	973	447
35°	813	506
45°	546	409
55°	144	142
65°	16	19
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P246470

CATALOG NUMBER: LD8B20D010 ER8B20830 8LBS0B

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	1118.0
2.5°	1116.7
5°	1112.6
7.5°	1104.4
10°	1094.1
12.5°	1080.4
15°	1065.3
17.5°	1046.2
20°	1024.9
22.5°	1000.3
25°	972.9
27.5°	940.0
30°	902.4
32.5°	859.9
35°	813.4
37.5°	762.0
40°	704.5
42.5°	634.0
45°	545.7
47.5°	438.9
50°	328.0
52.5°	224.6
55°	144.5
57.5°	85.6
60°	50.0
62.5°	29.4
65°	16.4
67.5°	7.5
70°	2.1
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)