

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions  
(formerly Eaton)

Brand: PORTFOLIO

Report Number: P246596

Luminaire Tested: **LD8B20D010 ER8B20927 8LBW0MW**

Issue Date: 03/03/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P246596  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-1801-521-48)  
Test Lab: INNOVATION CENTER(G1)  
Issue Date: 03/03/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: PORTFOLIO  
Catalog Number: LD8B20D010 ER8B20927 8LBW0MW  
Description: PORTFOLIO 8 INCH WIDE DISTRIBUTION 60 DEGREE CUTOFF RECESSED  
DOWNLIGHT  
97 CRI 2700 CCT WITH MATTE WHITE TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 1742.6 lumens  
Efficiency: N/A  
Efficacy: 81.8 lumens/watt  
Spacing Criteria (0/90/45): 1.11 / 1.11 / 1.05  
Luminous Opening: Point Source (0' x 0' x 0')  
CIE Type: Direct


Input Watts (W): 21.3  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P246596

CATALOG NUMBER: LD8B20D010 ER8B20927 8LBW0MW

### Luminous Intensity Polar Plot

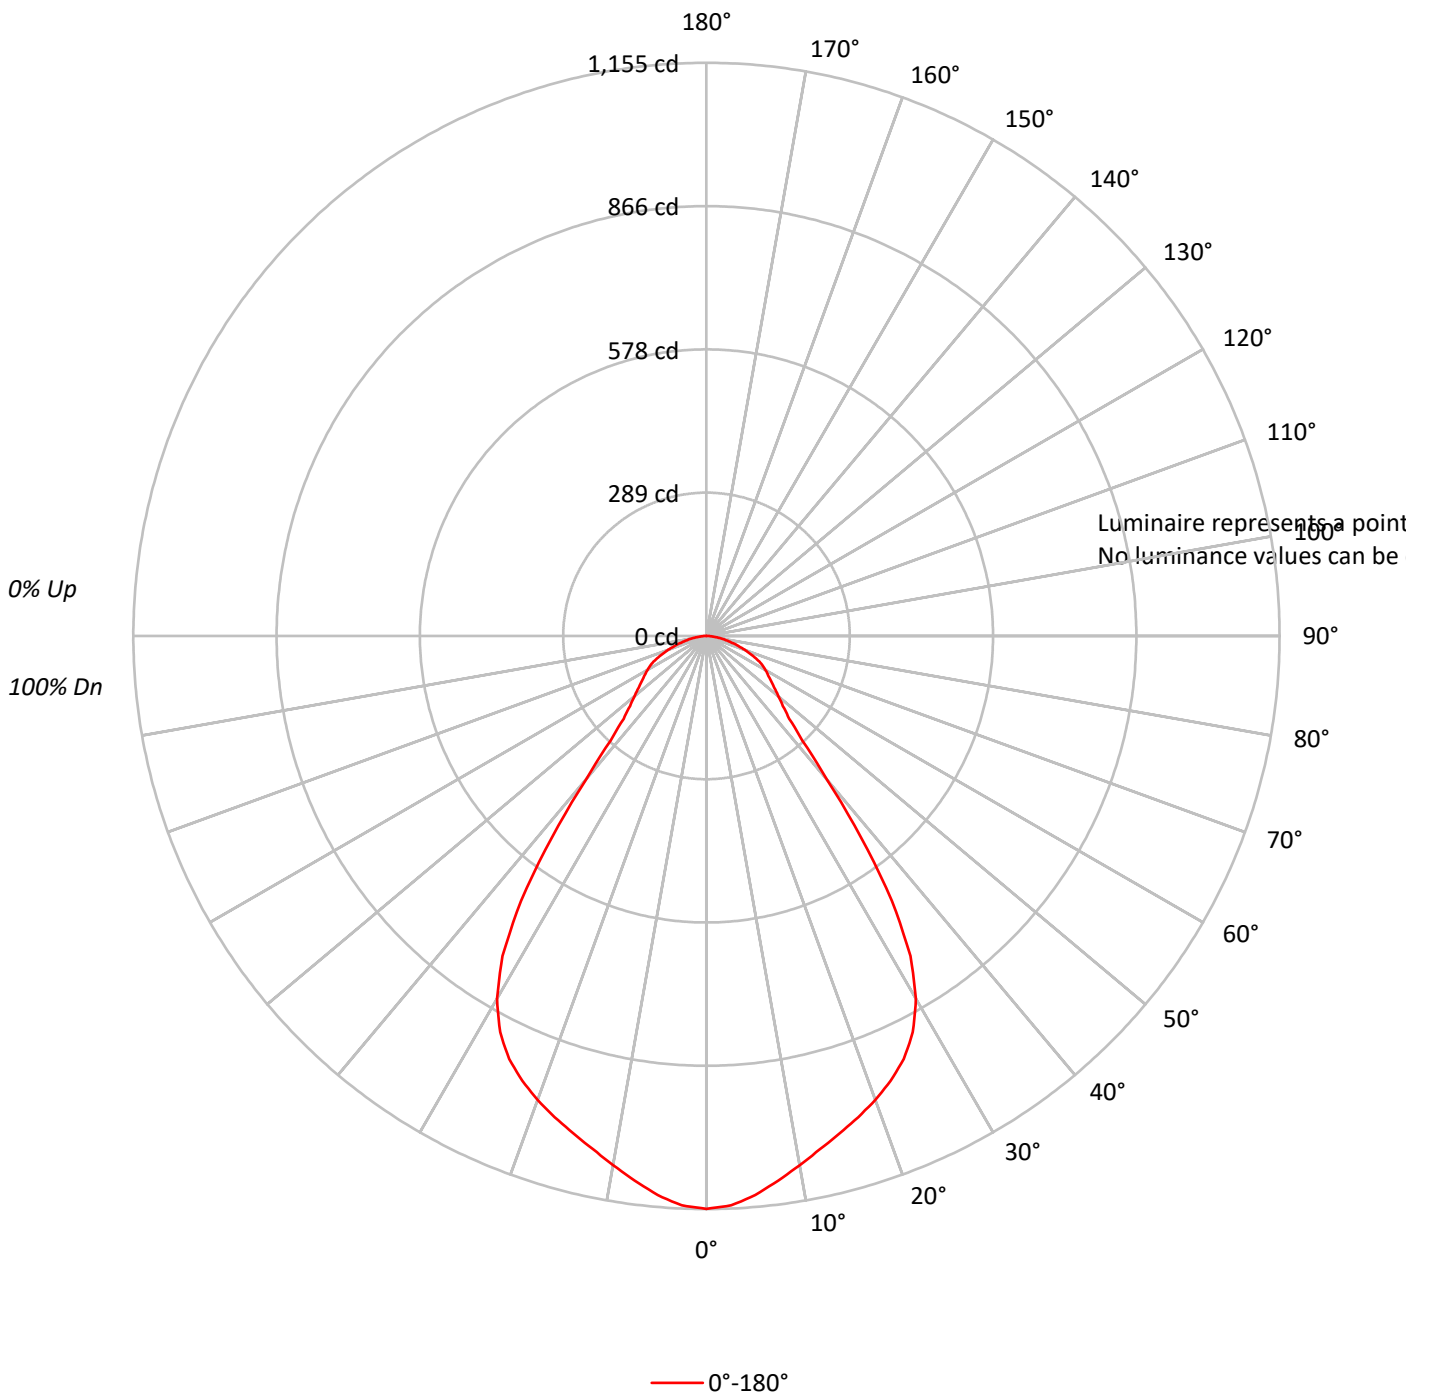



TEST NUMBER: P246596

CATALOG NUMBER: LD8B20D010 ER8B20927 8LBW0MW

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	111	107	104	101	109	105	102	99	101	99	96		97	95	93		94	92	91	89
2	103	97	91	87	101	95	90	86	92	87	84		88	85	82		86	83	80	78
3	96	88	81	76	94	86	80	75	83	78	74		81	76	73		78	75	72	70
4	90	80	73	67	88	79	72	67	76	70	66		74	69	65		72	68	64	62
5	84	73	66	60	82	72	65	60	70	64	59		68	63	59		67	62	58	56
6	79	67	60	54	77	66	59	54	65	58	54		63	58	53		62	57	53	51
7	74	62	55	49	72	61	54	49	60	54	49		59	53	49		57	52	48	47
8	69	58	50	45	68	57	50	45	56	50	45		55	49	45		54	48	45	43
9	65	54	47	42	64	53	46	42	52	46	41		51	45	41		50	45	41	40
10	62	50	43	39	61	50	43	39	49	43	38		48	42	38		47	42	38	37

**AVERAGE LUMINANCE (cd/sqm):**





TEST NUMBER: P246596

CATALOG NUMBER: LD8B20D010 ER8B20927 8LBW0MW

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	106.4	6.1
10°-20°	293.0	16.8
20°-30°	429.7	24.7
30°-40°	392.8	22.5
40°-50°	194.5	11.2
50°-60°	143.8	8.3
60°-70°	110.5	6.3
70°-80°	57.6	3.3
80°-90°	14.4	0.8
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	829.1	47.6
0°-40°	1221.9	70.1
0°-60°	1560.1	89.5
0°-90°	1742.6	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1742.6	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	1155	
5°	1131	106
15°	1038	293
25°	941	430
35°	652	393
45°	236	194
55°	159	144
65°	113	111
75°	54	58
85°	12	14
90°	0	



TEST NUMBER: P246596

CATALOG NUMBER: LD8B20D010 ER8B20927 8LBW0MW

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	1154.6
2.5°	1148.5
5°	1130.9
7.5°	1107.1
10°	1082.8
12.5°	1059.0
15°	1037.5
17.5°	1017.0
20°	994.8
22.5°	970.0
25°	940.7
27.5°	900.3
30°	844.0
32.5°	765.0
35°	651.6
37.5°	511.3
40°	377.6
42.5°	285.8
45°	236.0
47.5°	208.9
50°	189.0
52.5°	173.0
55°	159.2
57.5°	147.6
60°	137.6
62.5°	127.1
65°	112.7
67.5°	97.3
70°	81.8
72.5°	67.4
75°	53.7
77.5°	41.4
80°	30.4
82.5°	21.0
85°	12.2
87.5°	4.4
90°	0.0

(END OF REPORT)