

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions  
(formerly Eaton)

Brand: PORTFOLIO

Report Number: P243986

Luminaire Tested: **LD8B20D010 ER8B20935 8LBMOLI**

Issue Date: 03/03/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P243986  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-1801-521-11)  
Test Lab: INNOVATION CENTER(G1)  
Issue Date: 03/03/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: PORTFOLIO  
Catalog Number: LD8B20D010 ER8B20935 8LBM0LI  
Description: PORTFOLIO 8 INCH MEDIUM DISTRIBUTION 55 DEG CUTOFF RECESSED  
DOWNLIGHT  
90 CRI 3500 CCT WITH SPECULAR CLEAR TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 1928.0 lumens  
Efficiency: N/A  
Efficacy: 90.5 lumens/watt  
Spacing Criteria (0/90/45): 0.63 / 0.63 / 0.72  
Luminous Opening: Circular (Dia: 0.67' x H: 0')  
CIE Type: Direct


Input Watts (W): 21.3  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P243986

CATALOG NUMBER: LD8B20D010 ER8B20935 8LBM0LI

### Luminous Intensity Polar Plot

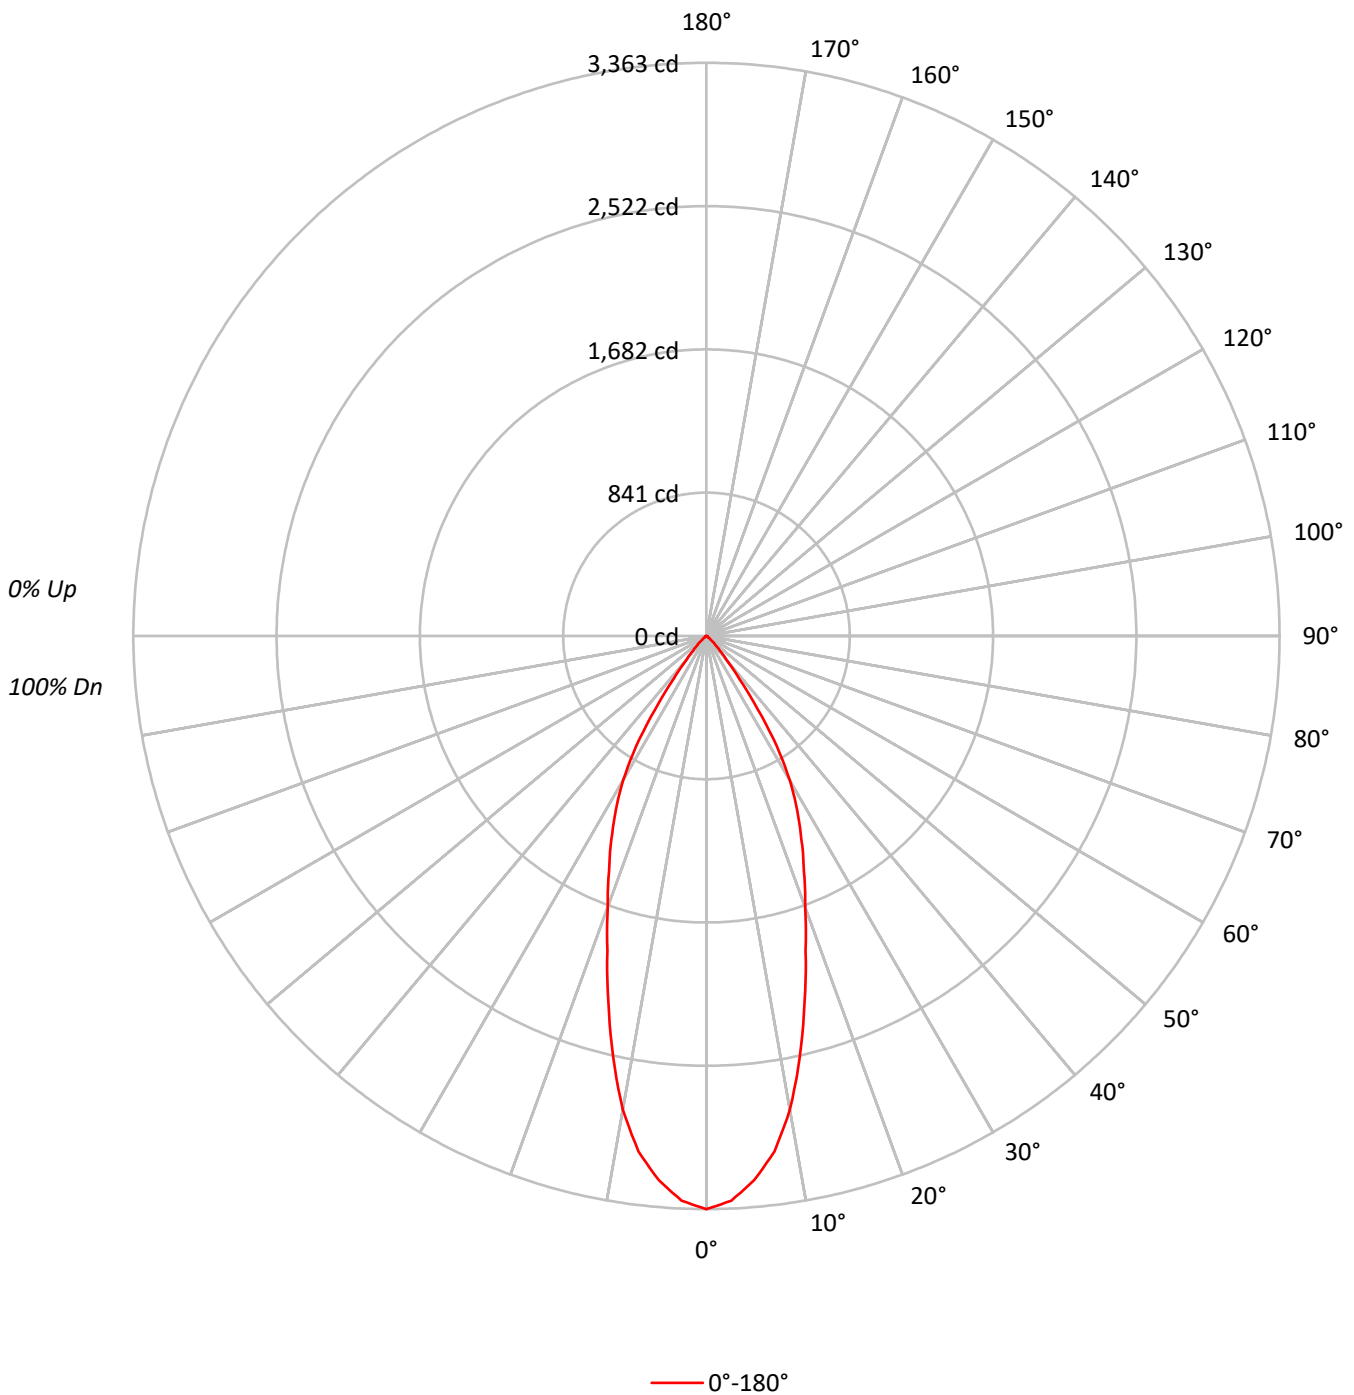



TEST NUMBER: P243986

CATALOG NUMBER: LD8B20D010 ER8B20935 8LBM0LI

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	114	111	109	107	111	109	107	105	105	104	102		101	100	99		98	97	96	94
2	109	104	101	97	107	103	99	96	99	97	94		96	94	92		94	92	90	89
3	104	98	93	90	102	97	92	89	94	90	88		92	89	86		89	87	85	83
4	99	92	87	83	97	91	86	83	89	85	82		87	84	81		85	82	80	78
5	95	87	82	78	93	86	81	77	84	80	77		83	79	76		81	78	75	74
6	90	82	77	73	89	81	76	73	80	75	72		79	75	72		77	74	71	70
7	86	78	72	69	85	77	72	68	76	71	68		75	71	68		74	70	67	66
8	83	74	68	65	82	73	68	65	72	68	64		71	67	64		70	67	64	62
9	79	70	65	61	78	70	65	61	69	64	61		68	64	61		67	63	60	59
10	76	67	62	58	75	67	61	58	66	61	58		65	61	58		64	60	58	56

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	103715
5°	99257
10°	88363
15°	70986
20°	55599
25°	44891
30°	34784
35°	19812
40°	7475
45°	3223
50°	1295
55°	484
60°	259
65°	175
70°	108
75°	71
80°	0
85°	0



TEST NUMBER: P243986

CATALOG NUMBER: LD8B20D010 ER8B20935 8LBM0LI

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	294.3	15.3
10°-20°	617.5	32.0
20°-30°	604.2	31.3
30°-40°	334.3	17.3
40°-50°	64.7	3.4
50°-60°	9.9	0.5
60°-70°	2.4	0.1
70°-80°	0.6	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1516.0	78.6
0°-40°	1850.3	96.0
0°-60°	1924.9	99.8
0°-90°	1928.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1928.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	3363	
5°	3207	294
15°	2224	617
25°	1319	604
35°	526	334
45°	74	65
55°	9	10
65°	2	2
75°	1	1
85°	0	0
90°	0	



TEST NUMBER: P243986

CATALOG NUMBER: LD8B20D010 ER8B20935 8LBM0LI

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	3363.4
2.5°	3317.1
5°	3206.6
7.5°	3051.5
10°	2822.0
12.5°	2531.8
15°	2223.6
17.5°	1934.6
20°	1694.3
22.5°	1495.4
25°	1319.4
27.5°	1153.6
30°	976.9
32.5°	769.6
35°	526.3
37.5°	316.6
40°	185.7
42.5°	116.0
45°	73.9
47.5°	46.3
50°	27.0
52.5°	15.0
55°	9.0
57.5°	5.4
60°	4.2
62.5°	3.0
65°	2.4
67.5°	1.8
70°	1.2
72.5°	0.6
75°	0.6
77.5°	0.6
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)