

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions  
(formerly Eaton)

Brand: PORTFOLIO

Report Number: P245582

Luminaire Tested: **LD8B20D010 ER8B20950 8LBW0GPH**

Issue Date: 03/03/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P245582  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-1801-521-46)  
Test Lab: INNOVATION CENTER(G1)  
Issue Date: 03/03/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: PORTFOLIO  
Catalog Number: LD8B20D010 ER8B20950 8LBW0GPH  
Description: PORTFOLIO 8 INCH WIDE DISTRIBUTION 60 DEGREE CUTOFF RECESSED  
DOWNLIGHT  
90 CRI 5000 CCT WITH GRAPHITE TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 1805.0 lumens  
Efficiency: N/A  
Efficacy: 84.7 lumens/watt  
Spacing Criteria (0/90/45): 1.11 / 1.11 / 1.05  
Luminous Opening: Circular (Dia: 0.67' x H: 0')  
CIE Type: Direct


Input Watts (W): 21.3  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P245582

CATALOG NUMBER: LD8B20D010 ER8B20950 8LBW0GPH

### Luminous Intensity Polar Plot

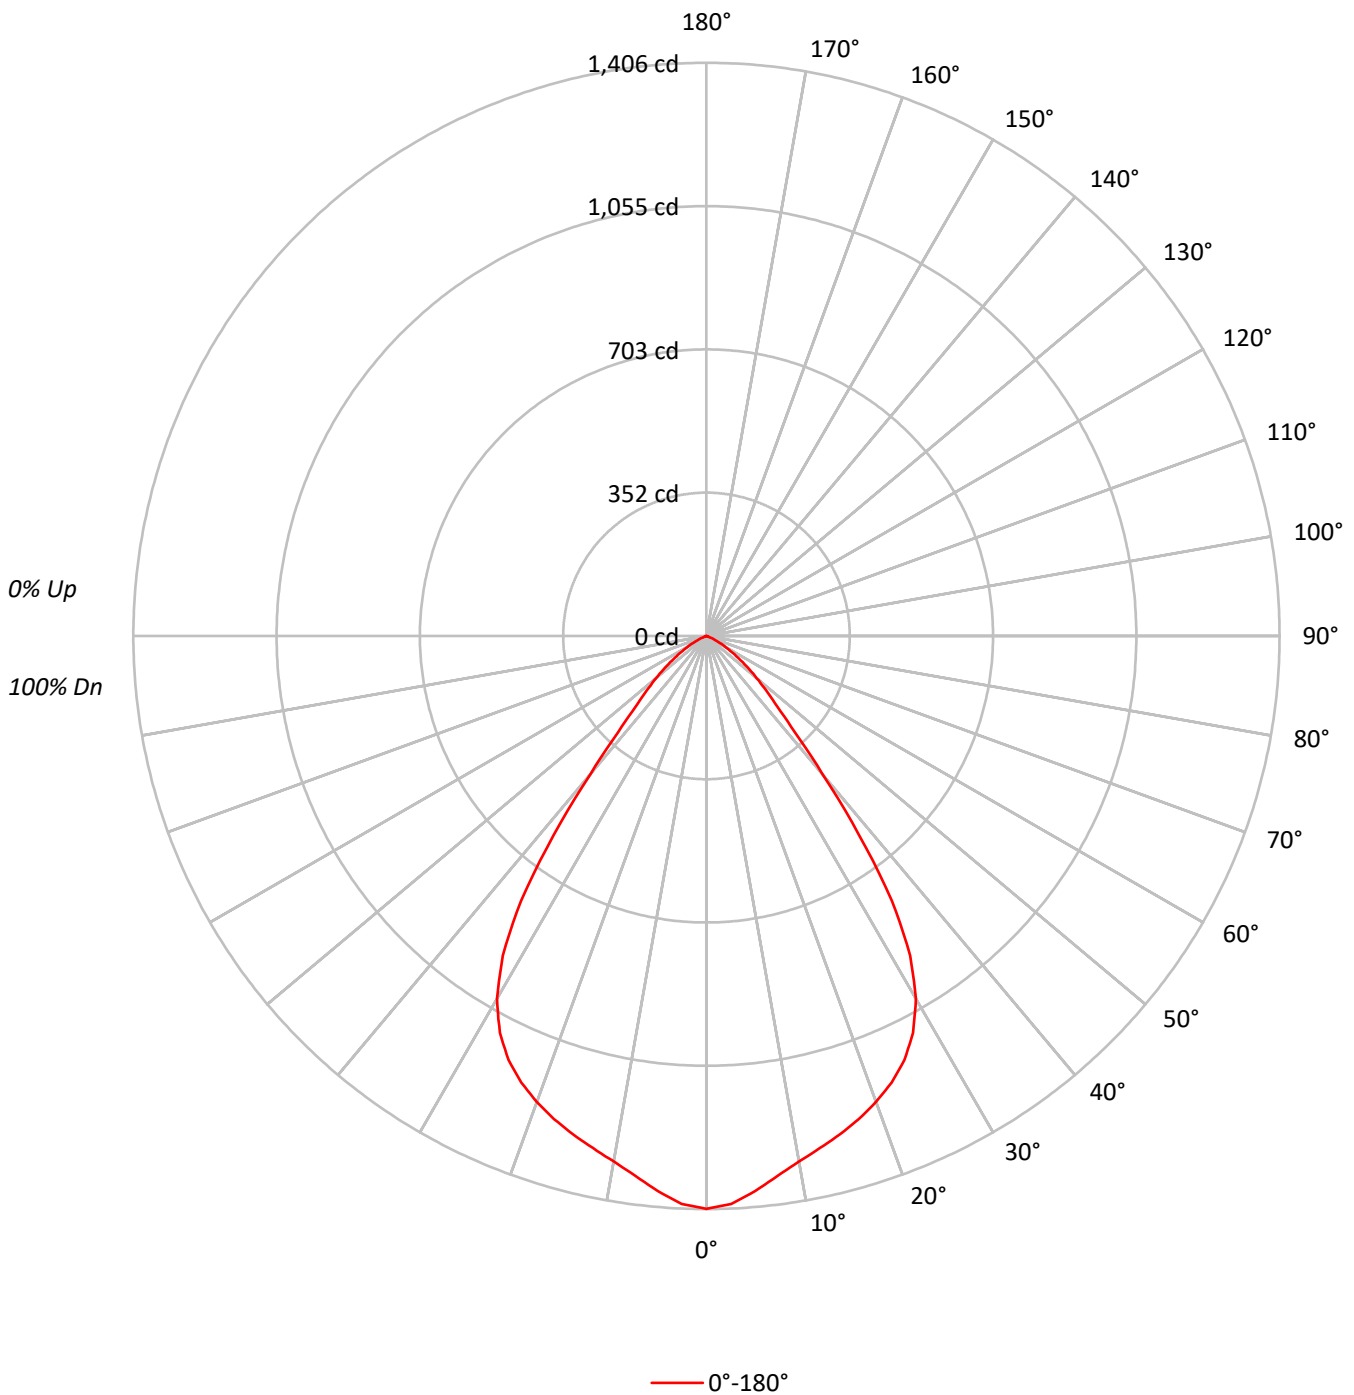



TEST NUMBER: P245582

CATALOG NUMBER: LD8B20D010 ER8B20950 8LBW0GPH

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	113	110	107	104	110	108	105	103	103	101	100	100	98	97	96	95	94	92
2	106	101	96	92	104	99	95	91	96	92	89	93	90	87	90	88	86	84
3	100	93	87	83	98	91	86	82	89	84	81	86	82	79	84	81	78	76
4	94	85	79	74	92	84	78	74	82	77	73	80	76	72	78	74	71	70
5	88	79	72	67	87	78	72	67	76	71	66	74	70	66	73	69	65	64
6	83	73	66	61	82	72	66	61	71	65	61	69	64	60	68	63	60	58
7	78	68	61	56	77	67	61	56	66	60	56	65	59	56	63	59	55	54
8	74	63	56	52	73	63	56	52	61	56	51	60	55	51	59	55	51	49
9	70	59	52	48	69	58	52	48	57	52	48	57	51	47	56	51	47	46
10	66	55	49	44	65	55	49	44	54	48	44	53	48	44	52	47	44	43

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	43340
5°	42314
10°	40987
15°	40397
20°	39920
25°	39063
30°	36586
35°	29874
40°	17837
45°	10710
50°	7719
55°	5252
60°	3293
65°	1620
70°	415
75°	155
80°	124
85°	0



TEST NUMBER: P245582

CATALOG NUMBER: LD8B20D010 ER8B20950 8LBW0GPH

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	128.6	7.1
10°-20°	357.1	19.8
20°-30°	524.4	29.1
30°-40°	475.4	26.3
40°-50°	203.5	11.3
50°-60°	90.0	5.0
60°-70°	24.0	1.3
70°-80°	1.9	0.1
80°-90°	0.1	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1010.1	56.0
0°-40°	1485.5	82.3
0°-60°	1779.0	98.6
0°-90°	1805.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1805.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	1406	
5°	1367	129
15°	1265	357
25°	1148	524
35°	794	475
45°	246	203
55°	98	90
65°	22	24
75°	1	2
85°	0	0
90°	0	



TEST NUMBER: P245582

CATALOG NUMBER: LD8B20D010 ER8B20950 8LBW0GPH

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	1405.5
2.5°	1394.4
5°	1367.0
7.5°	1335.7
10°	1309.0
12.5°	1286.9
15°	1265.4
17.5°	1242.6
20°	1216.5
22.5°	1185.9
25°	1148.1
27.5°	1097.3
30°	1027.5
32.5°	929.8
35°	793.6
37.5°	615.1
40°	443.1
42.5°	319.9
45°	245.6
47.5°	198.1
50°	160.9
52.5°	127.7
55°	97.7
57.5°	73.0
60°	53.4
62.5°	37.1
65°	22.2
67.5°	9.8
70°	4.6
72.5°	2.6
75°	1.3
77.5°	0.7
80°	0.7
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)