

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions  
(formerly Eaton)

Brand: PORTFOLIO

Report Number: P250469

Luminaire Tested: **LD8B200D010 ER8B200830 8LBM0GPH**

Issue Date: 03/03/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P250469  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P14005)  
Test Lab: INNOVATION CENTER-P1  
Issue Date: 03/03/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: PORTFOLIO  
Catalog Number: LD8B200D010 ER8B200830 8LBM0GPH  
Description: PORTFOLIO 8 INCH MEDIUM DISTRIBUTION 55 DEG CUTOFF RECESSED  
DOWNLIGHT  
80 CRI 3000 CCT WITH GRAPHITE TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 18009.9 lumens  
Efficiency: N/A  
Efficacy: 80.7 lumens/watt  
Spacing Criteria (0/90/45): 0.82 / 0.82 / 0.87  
Luminous Opening: Circular (Dia: 0.67' x H: 0')  
CIE Type: Direct


Input Watts (W): 223.3  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P250469

CATALOG NUMBER: LD8B200D010 ER8B200830 8LBM0GPH

### Luminous Intensity Polar Plot

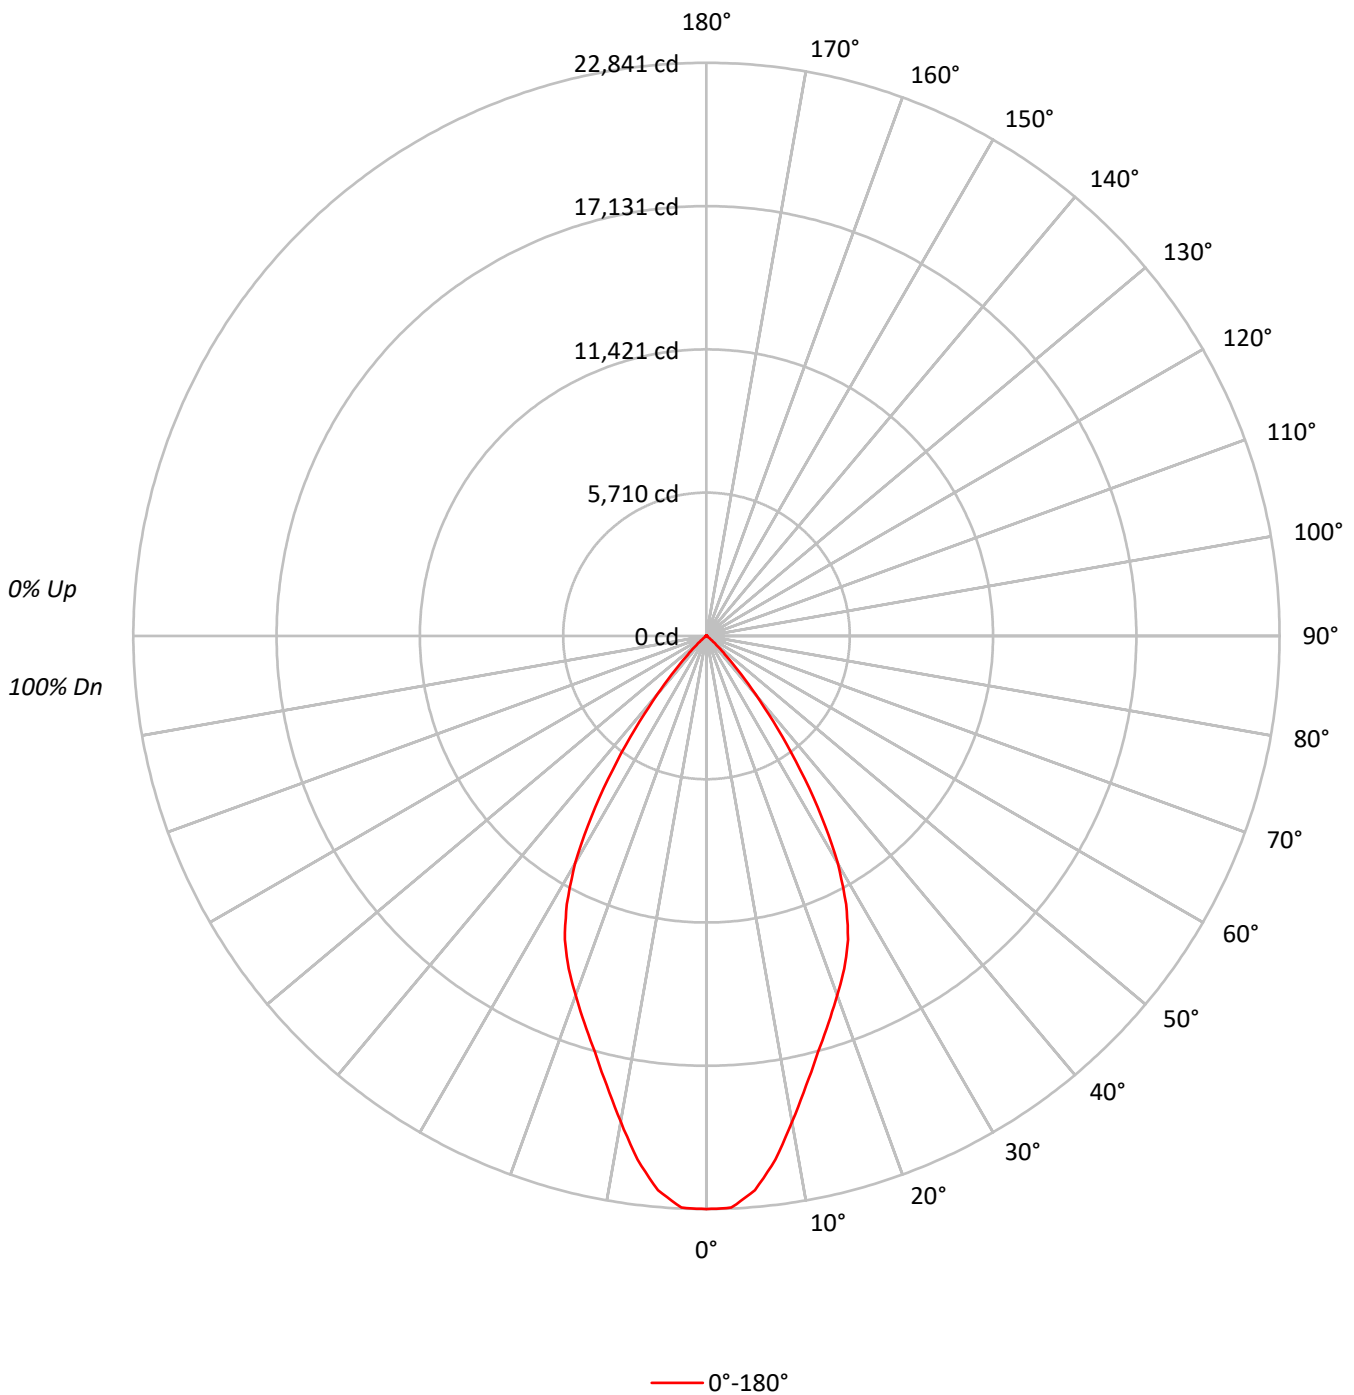



TEST NUMBER: P250469

CATALOG NUMBER: LD8B200D010 ER8B200830 8LBM0GPH

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	114	111	108	106	111	109	107	105	105	103	101	101	100	98	98	96	95	94
2	108	103	99	96	106	102	98	95	98	95	93	95	93	91	93	91	89	87
3	103	96	92	88	101	95	91	87	92	89	86	90	87	84	88	85	83	81
4	98	90	85	81	96	89	84	80	87	83	79	85	81	78	83	80	77	76
5	93	85	79	75	91	84	78	74	82	77	74	80	76	73	79	75	72	71
6	88	79	73	69	87	79	73	69	77	72	69	76	71	68	74	71	68	66
7	84	75	69	65	82	74	68	64	73	68	64	72	67	64	70	66	63	62
8	80	70	64	60	79	70	64	60	69	64	60	68	63	60	67	63	59	58
9	76	66	61	57	75	66	60	57	65	60	56	64	59	56	63	59	56	55
10	72	63	57	53	71	62	57	53	62	57	53	61	56	53	60	56	53	51

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	704345
5°	686537
10°	615444
15°	548140
20°	500040
25°	454317
30°	372535
35°	245169
40°	122304
45°	45519
50°	13826
55°	1672
60°	962
65°	0
70°	703
75°	2788
80°	0
85°	2760



TEST NUMBER: P250469

CATALOG NUMBER: LD8B200D010 ER8B200830 8LBM0GPH

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	2033.5	11.3
10°-20°	4835.0	26.8
20°-30°	6023.6	33.4
30°-40°	4063.0	22.6
40°-50°	960.7	5.3
50°-60°	70.2	0.4
60°-70°	12.5	0.1
70°-80°	9.2	0.1
80°-90°	2.1	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	12892.1	71.6
0°-40°	16955.1	94.1
0°-60°	17986.1	99.9
0°-90°	18009.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	18009.9	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	22841	
5°	22179	###
15°	17170	4835
25°	13353	6024
35°	6513	4063
45°	1044	961
55°	31	70
65°	0	13
75°	23	9
85°	8	2
90°	0	



TEST NUMBER: P250469

CATALOG NUMBER: LD8B200D010 ER8B200830 8LBM0GPH

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	22841.4
2.5°	22802.5
5°	22179.2
7.5°	21049.6
10°	19655.2
12.5°	18338.6
15°	17170.1
17.5°	16165.0
20°	15238.0
22.5°	14349.9
25°	13352.8
27.5°	12051.8
30°	10462.5
32.5°	8538.4
35°	6512.8
37.5°	4658.7
40°	3038.3
42.5°	1815.3
45°	1043.8
47.5°	584.2
50°	288.2
52.5°	132.5
55°	31.1
57.5°	7.8
60°	15.6
62.5°	23.4
65°	0.0
67.5°	15.6
70°	7.8
72.5°	7.8
75°	23.4
77.5°	0.0
80°	0.0
82.5°	0.0
85°	7.8
87.5°	0.0
90°	0.0

(END OF REPORT)