

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: PORTFOLIO

Report Number: P250301

Luminaire Tested: **LD8B200D010 ER8B200830 8LBN0GPH**

Issue Date: 03/03/2020

Test Information

Test Method: LM-79-08
Report Number: P250301
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P13948)
Test Lab: INNOVATION CENTER-P1
Issue Date: 03/03/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LD8B200D010 ER8B200830 8LBN0GPH
Description: PORTFOLIO 8 INCH NARROW DISTRIBUTION 50 DEGREE CUTOFF RECESSED
DOWNLIGHT
80 CRI 3000 CCT WITH GRAPHITE TRIM
Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 16280.0 lumens
Efficiency: N/A
Efficacy: 72.9 lumens/watt
Spacing Criteria (0/90/45): 0.69 / 0.69 / 0.77
Luminous Opening: Circular (Dia: 0.67' x H: 0')
CIE Type: Direct


Input Watts (W): 223.3
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P250301

CATALOG NUMBER: LD8B200D010 ER8B200830 8LBN0GPH

Luminous Intensity Polar Plot

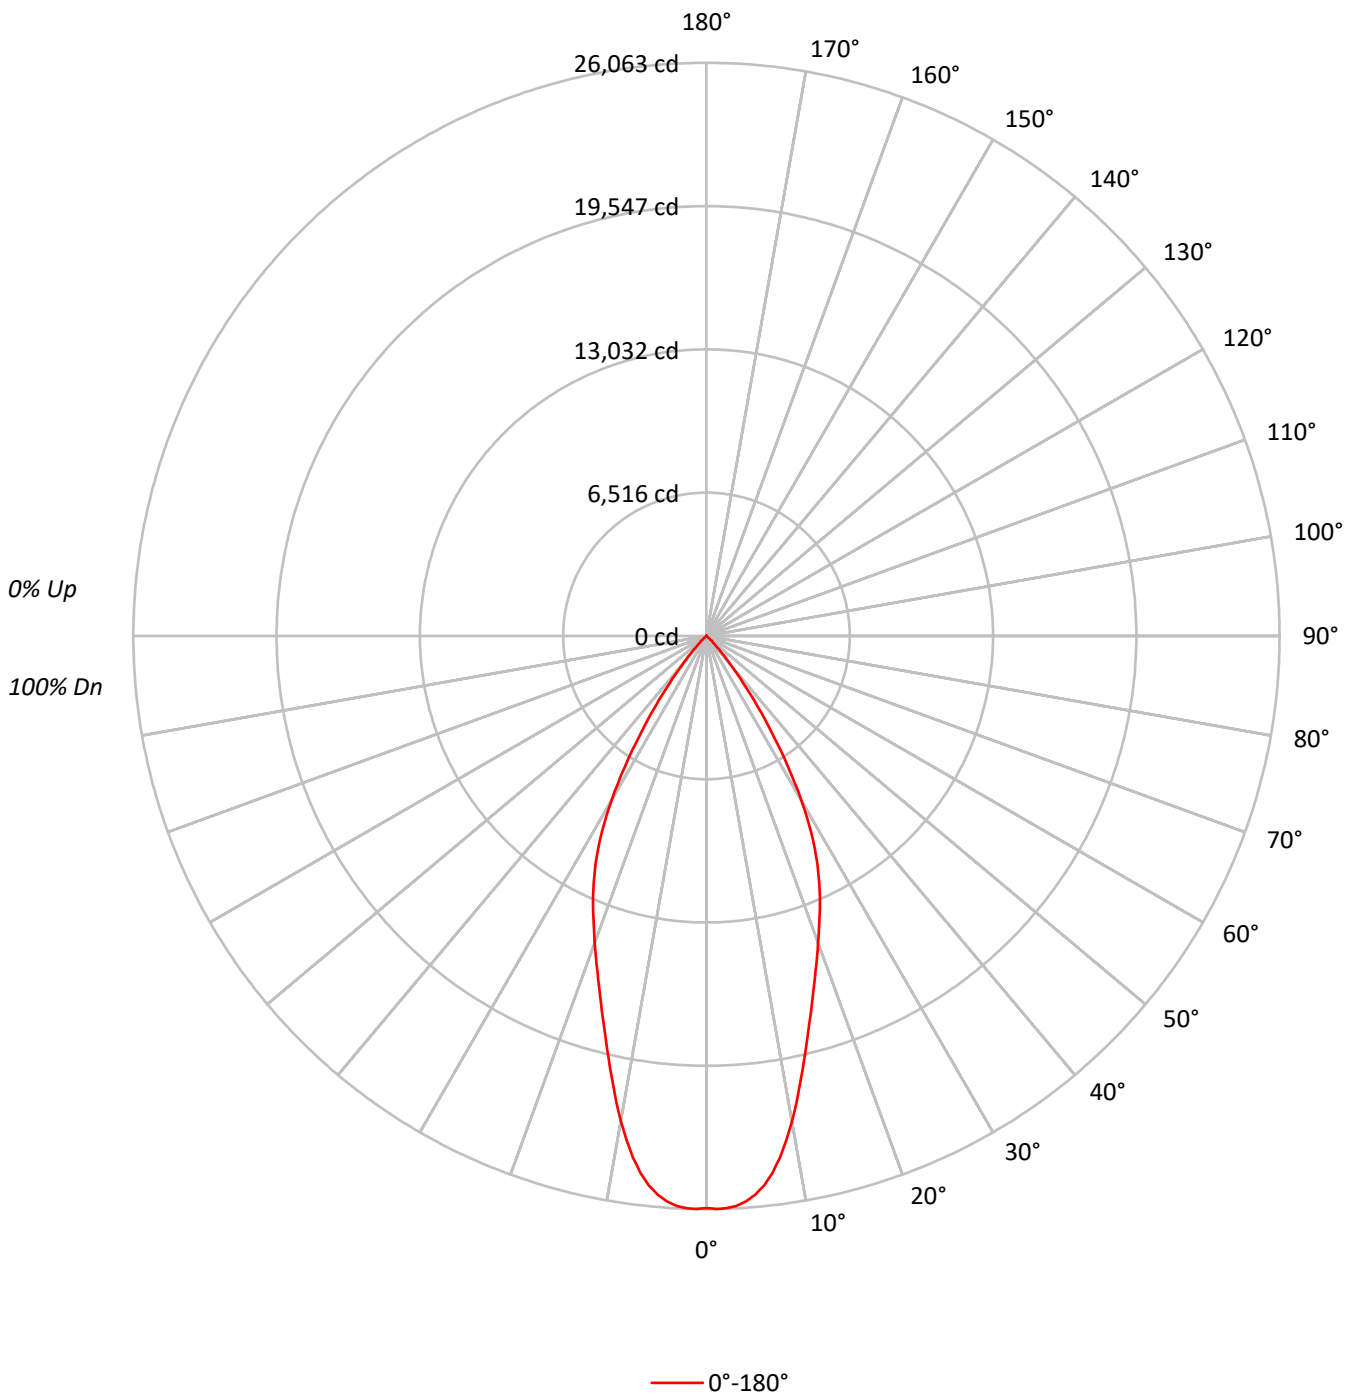



TEST NUMBER: P250301

CATALOG NUMBER: LD8B200D010 ER8B200830 8LBN0GPH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

| | | | | | | | | | | | | | | | | | | |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| RF | 20 | | | | 20 | | | | 20 | | | | 20 | | | | 20 | |
| RC | 80 | | | | 70 | | | | 50 | | | | 30 | | | | 10 | 0 |
| RW | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 0 |
| RCR | | | | | | | | | | | | | | | | | | |
| 0 | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 | 106 | 106 | 106 | 102 | 102 | 102 | 100 |
| 1 | 114 | 111 | 109 | 107 | 112 | 109 | 107 | 105 | 105 | 104 | 102 | 101 | 100 | 99 | 98 | 97 | 96 | 94 |
| 2 | 109 | 104 | 101 | 97 | 107 | 103 | 99 | 96 | 99 | 97 | 94 | 96 | 94 | 92 | 94 | 92 | 90 | 89 |
| 3 | 104 | 98 | 93 | 90 | 102 | 97 | 92 | 89 | 94 | 90 | 88 | 92 | 89 | 86 | 89 | 87 | 85 | 83 |
| 4 | 99 | 92 | 87 | 83 | 97 | 91 | 86 | 83 | 89 | 85 | 82 | 87 | 84 | 81 | 85 | 82 | 80 | 78 |
| 5 | 95 | 87 | 82 | 78 | 93 | 86 | 81 | 77 | 84 | 80 | 77 | 83 | 79 | 76 | 81 | 78 | 75 | 74 |
| 6 | 90 | 82 | 77 | 73 | 89 | 81 | 76 | 72 | 80 | 75 | 72 | 79 | 75 | 71 | 77 | 74 | 71 | 70 |
| 7 | 86 | 78 | 72 | 68 | 85 | 77 | 72 | 68 | 76 | 71 | 68 | 75 | 71 | 67 | 74 | 70 | 67 | 66 |
| 8 | 83 | 74 | 68 | 64 | 81 | 73 | 68 | 64 | 72 | 67 | 64 | 71 | 67 | 64 | 70 | 66 | 63 | 62 |
| 9 | 79 | 70 | 65 | 61 | 78 | 70 | 64 | 61 | 69 | 64 | 61 | 68 | 63 | 60 | 67 | 63 | 60 | 59 |
| 10 | 76 | 67 | 61 | 58 | 75 | 66 | 61 | 58 | 65 | 61 | 57 | 65 | 60 | 57 | 64 | 60 | 57 | 56 |

AVERAGE LUMINANCE (cd/sqm):

| | |
|-----|--------|
| | 0° |
| 0° | 802170 |
| 5° | 789354 |
| 10° | 701323 |
| 15° | 578529 |
| 20° | 487239 |
| 25° | 410960 |
| 30° | 307702 |
| 35° | 174138 |
| 40° | 68854 |
| 45° | 18486 |
| 50° | 3540 |
| 55° | 0 |
| 60° | 512 |
| 65° | 0 |
| 70° | 0 |
| 75° | 0 |
| 80° | 0 |
| 85° | 0 |



TEST NUMBER: P250301

CATALOG NUMBER: LD8B200D010 ER8B200830 8LBNOGPH

ZONAL LUMENS:

| Zone | Lumens | % Fixture |
|-----------|---------|-----------|
| 0°-10° | 2335.2 | 14.3 |
| 10°-20° | 5075.6 | 31.2 |
| 20°-30° | 5449.0 | 33.5 |
| 30°-40° | 2945.0 | 18.1 |
| 40°-50° | 459.5 | 2.8 |
| 50°-60° | 12.6 | 0.1 |
| 60°-70° | 3.1 | 0.0 |
| 70°-80° | 0.0 | 0.0 |
| 80°-90° | 0.0 | 0.0 |
| 90°-100° | 0.0 | 0.0 |
| 100°-110° | 0.0 | 0.0 |
| 110°-120° | 0.0 | 0.0 |
| 120°-130° | 0.0 | 0.0 |
| 130°-140° | 0.0 | 0.0 |
| 140°-150° | 0.0 | 0.0 |
| 150°-160° | 0.0 | 0.0 |
| 160°-170° | 0.0 | 0.0 |
| 170°-180° | 0.0 | 0.0 |
| 0°-30° | 12859.8 | 79.0 |
| 0°-40° | 15804.9 | 97.1 |
| 0°-60° | 16276.9 | 100.0 |
| 0°-90° | 16280.0 | 100.0 |
| 90°-120° | 0.0 | 0.0 |
| 90°-150° | 0.0 | 0.0 |
| 90°-180° | 0.0 | 0.0 |
| 0°-180° | 16280.0 | 100.0 |

CANDELA DISTRIBUTION:

| | 0° | Flux |
|-----|-------|------|
| 0° | 26014 | |
| 5° | 25501 | ### |
| 15° | 18122 | 5076 |
| 25° | 12078 | 5449 |
| 35° | 4626 | 2945 |
| 45° | 424 | 459 |
| 55° | 0 | 13 |
| 65° | 0 | 3 |
| 75° | 0 | 0 |
| 85° | 0 | 0 |
| 90° | 0 | |



TEST NUMBER: P250301

CATALOG NUMBER: LD8B200D010 ER8B200830 8LBNOGPH

CANDELA DISTRIBUTION (FULL):

| 0° | |
|-------|---------|
| 0° | 26013.8 |
| 1° | 26063.2 |
| 2° | 26038.7 |
| 3° | 25949.5 |
| 4° | 25778.2 |
| 5° | 25500.8 |
| 6° | 25118.8 |
| 7° | 24604.9 |
| 8° | 23961.6 |
| 9° | 23221.2 |
| 10° | 22397.9 |
| 11° | 21534.3 |
| 12° | 20638.4 |
| 13° | 19743.4 |
| 14° | 18911.8 |
| 15° | 18122.0 |
| 16° | 17397.0 |
| 17° | 16696.5 |
| 18° | 16044.9 |
| 19° | 15434.8 |
| 20° | 14847.9 |
| 21° | 14277.6 |
| 22° | 13739.6 |
| 23° | 13202.9 |
| 24° | 12640.9 |
| 25° | 12078.5 |
| 26° | 11508.2 |
| 27° | 10857.0 |
| 28° | 10139.8 |
| 29° | 9407.8 |
| 30° | 8641.7 |
| 31° | 7819.2 |
| 32° | 6995.9 |
| 33° | 6181.7 |
| 34° | 5359.2 |
| 35° | 4625.9 |
| 37.5° | 2956.5 |
| 40° | 1710.5 |
| 42.5° | 912.5 |
| 45° | 423.9 |
| 47.5° | 228.5 |
| 50° | 73.8 |
| 52.5° | 8.3 |
| 55° | 0.0 |
| 57.5° | 8.3 |



TEST NUMBER: P250301

CATALOG NUMBER: LD8B200D010 ER8B200830 8LBNOGPH

CANDELA DISTRIBUTION (continued):

| | 0° |
|-------|-----|
| 60° | 8.3 |
| 62.5° | 0.0 |
| 65° | 0.0 |
| 67.5° | 8.3 |
| 70° | 0.0 |
| 72.5° | 0.0 |
| 75° | 0.0 |
| 77.5° | 0.0 |
| 80° | 0.0 |
| 82.5° | 0.0 |
| 85° | 0.0 |
| 87.5° | 0.0 |
| 90° | 0.0 |

(END OF REPORT)