

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: PORTFOLIO

Report Number: P250525

Luminaire Tested: **LD8B200D010 ER8B200950 8LBM0GPH**

Issue Date: 03/03/2020

Test Information

Test Method: LM-79-08
Report Number: P250525
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P14005)
Test Lab: INNOVATION CENTER-P1
Issue Date: 03/03/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LD8B200D010 ER8B200950 8LBM0GPH
Description: PORTFOLIO 8 INCH MEDIUM DISTRIBUTION 55 DEG CUTOFF RECESSED
DOWNLIGHT
90 CRI 5000 CCT WITH GRAPHITE TRIM
Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 17270.0 lumens
Efficiency: N/A
Efficacy: 77.3 lumens/watt
Spacing Criteria (0/90/45): 0.82 / 0.82 / 0.87
Luminous Opening: Circular (Dia: 0.67' x H: 0')
CIE Type: Direct


Input Watts (W): 223.3
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P250525

CATALOG NUMBER: LD8B200D010 ER8B200950 8LBM0GPH

Luminous Intensity Polar Plot

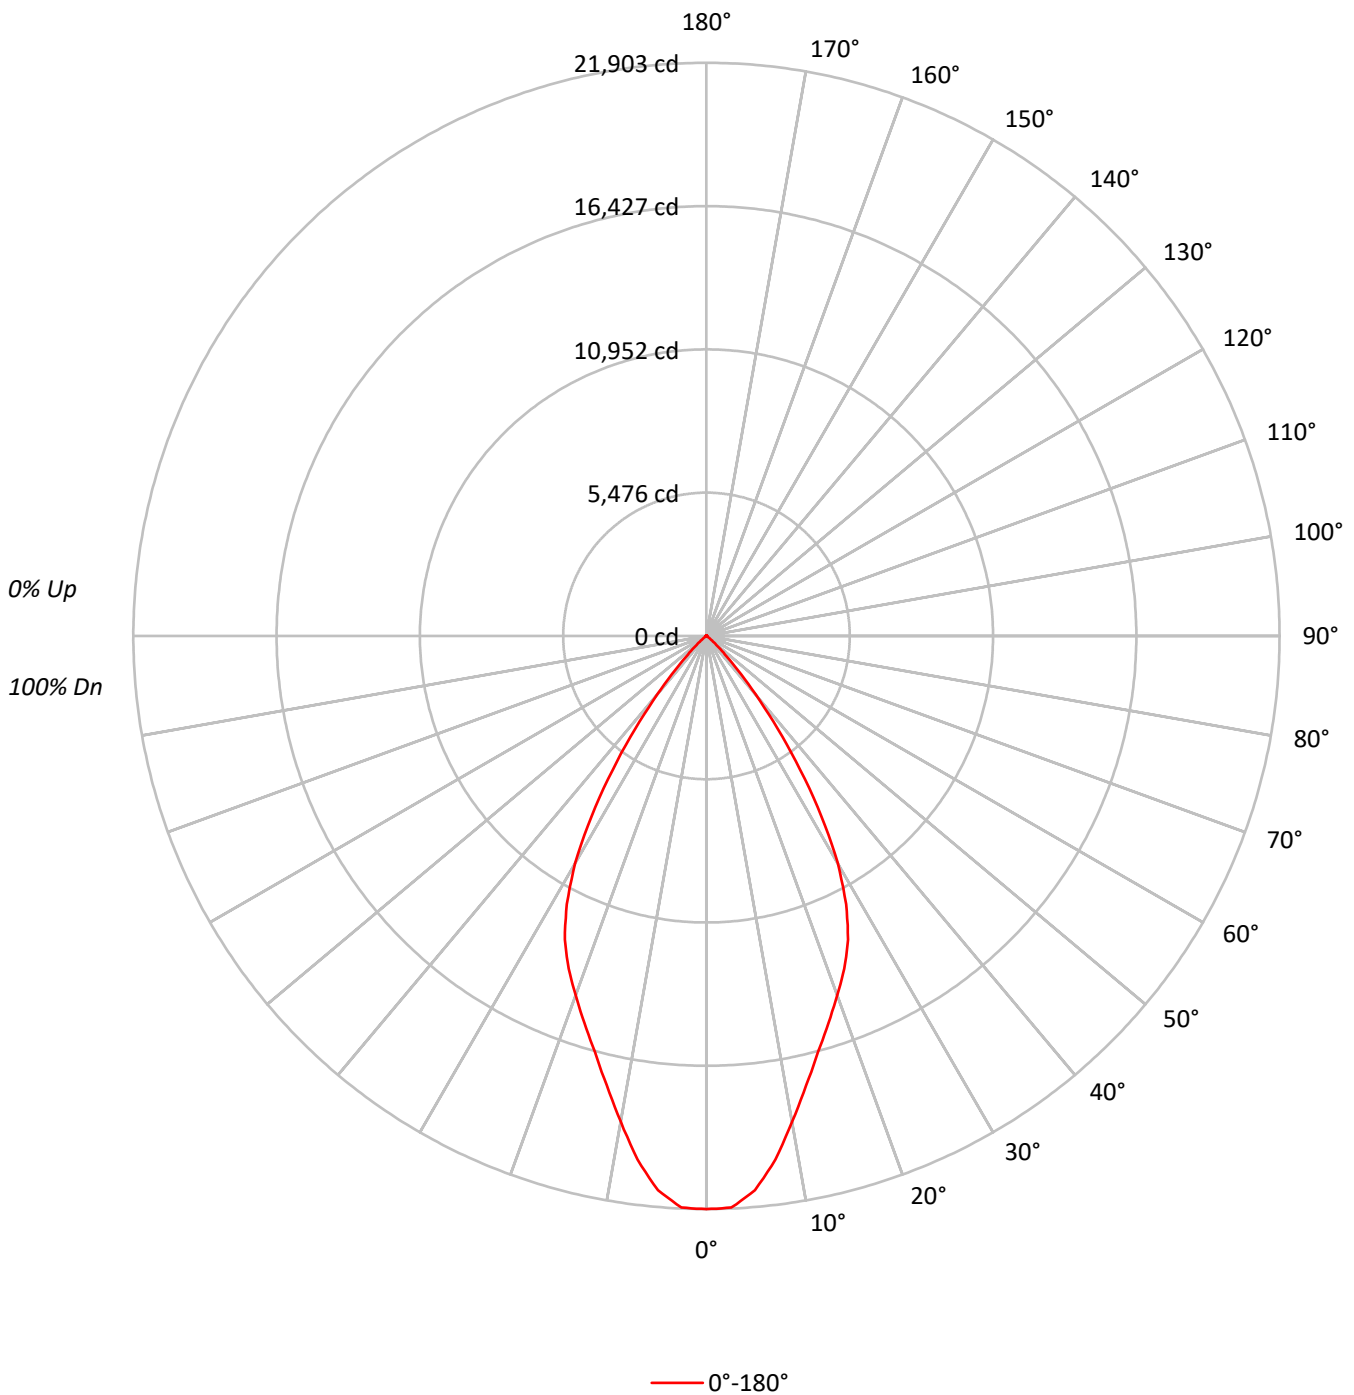



TEST NUMBER: P250525

CATALOG NUMBER: LD8B200D010 ER8B200950 8LBM0GPH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	114	111	108	106	111	109	107	105	105	103	101		101	100	98		98	96	95	94
2	108	103	99	96	106	102	98	95	98	95	93		95	93	91		93	91	89	87
3	103	96	92	88	101	95	91	87	92	89	86		90	87	84		88	85	83	81
4	98	90	85	81	96	89	84	80	87	83	79		85	81	78		83	80	77	76
5	93	85	79	75	91	84	78	74	82	77	74		80	76	73		79	75	72	71
6	88	79	73	69	87	79	73	69	77	72	69		76	71	68		74	71	68	66
7	84	75	69	65	82	74	68	64	73	68	64		72	67	64		70	66	63	62
8	80	70	64	60	79	70	64	60	69	64	60		68	63	60		67	63	59	58
9	76	66	61	57	75	66	60	57	65	60	56		64	59	56		63	59	56	55
10	72	63	57	53	71	62	57	53	62	57	53		61	56	53		60	56	53	51

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	675405
5°	658329
10°	590156
15°	525618
20°	479494
25°	435651
30°	357228
35°	235095
40°	117276
45°	43648
50°	13260
55°	1602
60°	925
65°	0
70°	676
75°	2681
80°	0
85°	2654



TEST NUMBER: P250525

CATALOG NUMBER: LD8B200D010 ER8B200950 8LBM0GPH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	1950.0	11.3
10°-20°	4636.3	26.8
20°-30°	5776.1	33.4
30°-40°	3896.1	22.6
40°-50°	921.3	5.3
50°-60°	67.3	0.4
60°-70°	12.0	0.1
70°-80°	8.9	0.1
80°-90°	2.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	12362.4	71.6
0°-40°	16258.4	94.1
0°-60°	17247.0	99.9
0°-90°	17270.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	17270.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	21903	
5°	21268	###
15°	16465	4636
25°	12804	5776
35°	6245	3896
45°	1001	921
55°	30	67
65°	0	12
75°	22	9
85°	8	2
90°	0	



TEST NUMBER: P250525

CATALOG NUMBER: LD8B200D010 ER8B200950 8LBM0GPH

CANDELA DISTRIBUTION (FULL):

	0°
0°	21902.9
2.5°	21865.6
5°	21267.9
7.5°	20184.7
10°	18847.6
12.5°	17585.1
15°	16464.6
17.5°	15500.8
20°	14611.9
22.5°	13760.3
25°	12804.2
27.5°	11556.6
30°	10032.6
32.5°	8187.5
35°	6245.2
37.5°	4467.3
40°	2913.4
42.5°	1740.7
45°	1000.9
47.5°	560.2
50°	276.4
52.5°	127.0
55°	29.8
57.5°	7.5
60°	15.0
62.5°	22.5
65°	0.0
67.5°	15.0
70°	7.5
72.5°	7.5
75°	22.5
77.5°	0.0
80°	0.0
82.5°	0.0
85°	7.5
87.5°	0.0
90°	0.0

(END OF REPORT)