

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: PORTFOLIO

Report Number: P245542

Luminaire Tested: **LD8B40D010 ER8B40835 8LBW0GPH**

Issue Date: 03/03/2020

Test Information

Test Method: LM-79-08
Report Number: P245542
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-1801-521-46)
Test Lab: INNOVATION CENTER(G1)
Issue Date: 03/03/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LD8B40D010 ER8B40835 8LBW0GPH
Description: PORTFOLIO 8 INCH WIDE DISTRIBUTION 60 DEGREE CUTOFF RECESSED
DOWNLIGHT
80 CRI 3500 CCT WITH GRAPHITE TRIM
Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 3940.0 lumens
Efficiency: N/A
Efficacy: 96.3 lumens/watt
Spacing Criteria (0/90/45): 1.11 / 1.11 / 1.05
Luminous Opening: Circular (Dia: 0.67' x H: 0')
CIE Type: Direct


Input Watts (W): 40.9
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P245542

CATALOG NUMBER: LD8B40D010 ER8B40835 8LBW0GPH

Luminous Intensity Polar Plot

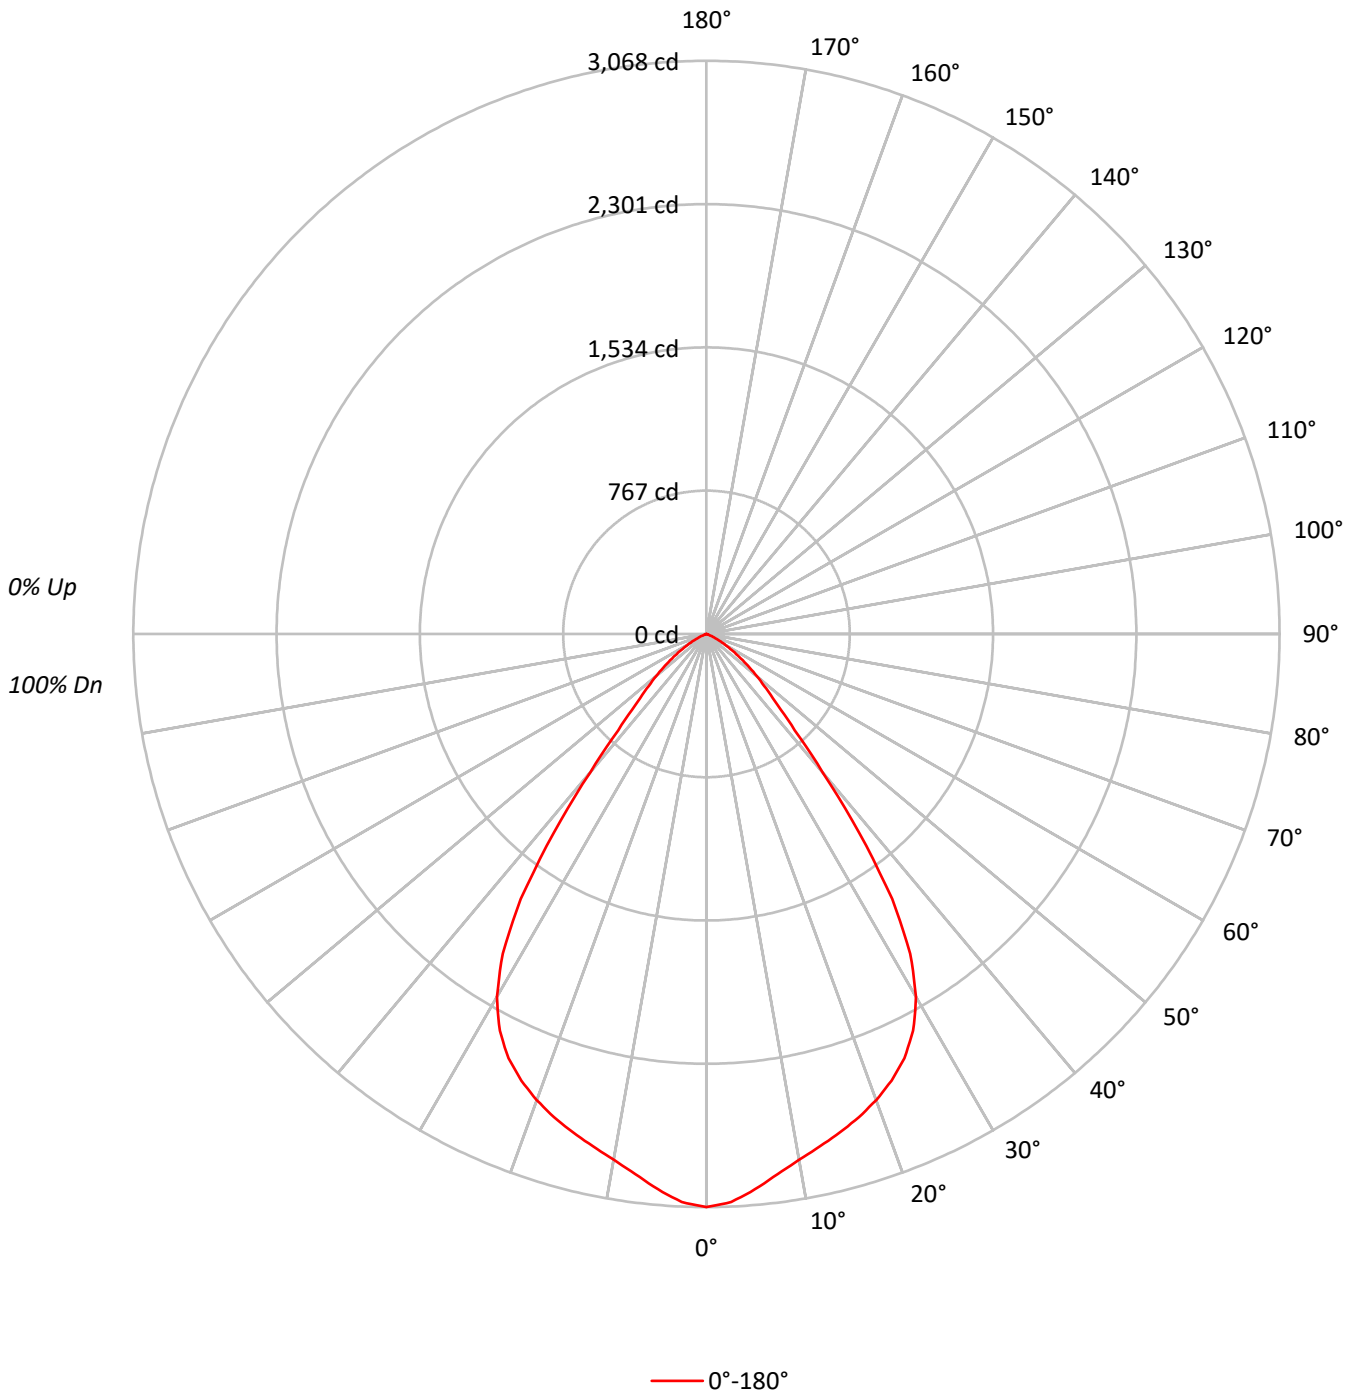



TEST NUMBER: P245542

CATALOG NUMBER: LD8B40D010 ER8B40835 8LBW0GPH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	113	110	107	104	110	108	105	103	103	101	100	100	98	97	96	95	94	92
2	106	101	96	92	104	99	95	91	96	92	89	93	90	87	90	88	86	84
3	100	93	87	83	98	91	86	82	89	84	81	86	82	79	84	81	78	76
4	94	85	79	74	92	84	78	74	82	77	73	80	76	72	78	74	71	70
5	88	79	72	67	87	78	72	67	76	71	66	74	70	66	73	69	65	64
6	83	73	66	61	82	72	66	61	71	65	61	69	64	60	68	63	60	58
7	78	68	61	56	77	67	61	56	66	60	56	65	59	56	63	59	55	54
8	74	63	56	52	73	63	56	52	61	56	51	60	55	51	59	55	51	49
9	70	59	52	48	69	58	52	48	57	52	48	57	51	47	56	51	47	46
10	66	55	49	44	65	55	49	44	54	48	44	53	48	44	52	47	44	43

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	94603
5°	92367
10°	89471
15°	88178
20°	87138
25°	85268
30°	79866
35°	65215
40°	38934
45°	23383
50°	16853
55°	11467
60°	7191
65°	3532
70°	902
75°	334
80°	249
85°	0



TEST NUMBER: P245542

CATALOG NUMBER: LD8B40D010 ER8B40835 8LBW0GPH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	280.7	7.1
10°-20°	779.5	19.8
20°-30°	1144.7	29.1
30°-40°	1037.7	26.3
40°-50°	444.2	11.3
50°-60°	196.5	5.0
60°-70°	52.4	1.3
70°-80°	4.1	0.1
80°-90°	0.2	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2204.9	56.0
0°-40°	3242.6	82.3
0°-60°	3883.3	98.6
0°-90°	3940.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	3940.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	3068	
5°	2984	281
15°	2762	779
25°	2506	1145
35°	1732	1038
45°	536	444
55°	213	197
65°	48	52
75°	3	4
85°	0	0
90°	0	



TEST NUMBER: P245542

CATALOG NUMBER: LD8B40D010 ER8B40835 8LBW0GPH

CANDELA DISTRIBUTION (FULL):

	0°
0°	3067.9
2.5°	3043.7
5°	2984.0
7.5°	2915.7
10°	2857.4
12.5°	2809.0
15°	2762.1
17.5°	2712.3
20°	2655.4
22.5°	2588.6
25°	2506.1
27.5°	2395.1
30°	2243.0
32.5°	2029.6
35°	1732.4
37.5°	1342.6
40°	967.2
42.5°	698.3
45°	536.2
47.5°	432.4
50°	351.3
52.5°	278.8
55°	213.3
57.5°	159.3
60°	116.6
62.5°	81.1
65°	48.4
67.5°	21.3
70°	10.0
72.5°	5.7
75°	2.8
77.5°	1.4
80°	1.4
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)