

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions  
(formerly Eaton)

Brand: PORTFOLIO

Report Number: P244678

Luminaire Tested: **LD8B40D010 ER8B40835 8LBW0WMH**

Issue Date: 03/03/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P244678  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-1801-521-44)  
Test Lab: INNOVATION CENTER(G1)  
Issue Date: 03/03/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: PORTFOLIO  
Catalog Number: LD8B40D010 ER8B40835 8LBW0WMH  
Description: PORTFOLIO 8 INCH WIDE DISTRIBUTION 60 DEGREE CUTOFF RECESSED  
DOWNLIGHT  
80 CRI 3500 CCT WITH WARM HAZE TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 4280.0 lumens  
Efficiency: N/A  
Efficacy: 104.6 lumens/watt  
Spacing Criteria (0/90/45): 1.14 / 1.14 / 1.06  
Luminous Opening: Circular (Dia: 0.67' x H: 0')  
CIE Type: Direct


Input Watts (W): 40.9  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P244678

CATALOG NUMBER: LD8B40D010 ER8B40835 8LBW0WMH

### Luminous Intensity Polar Plot

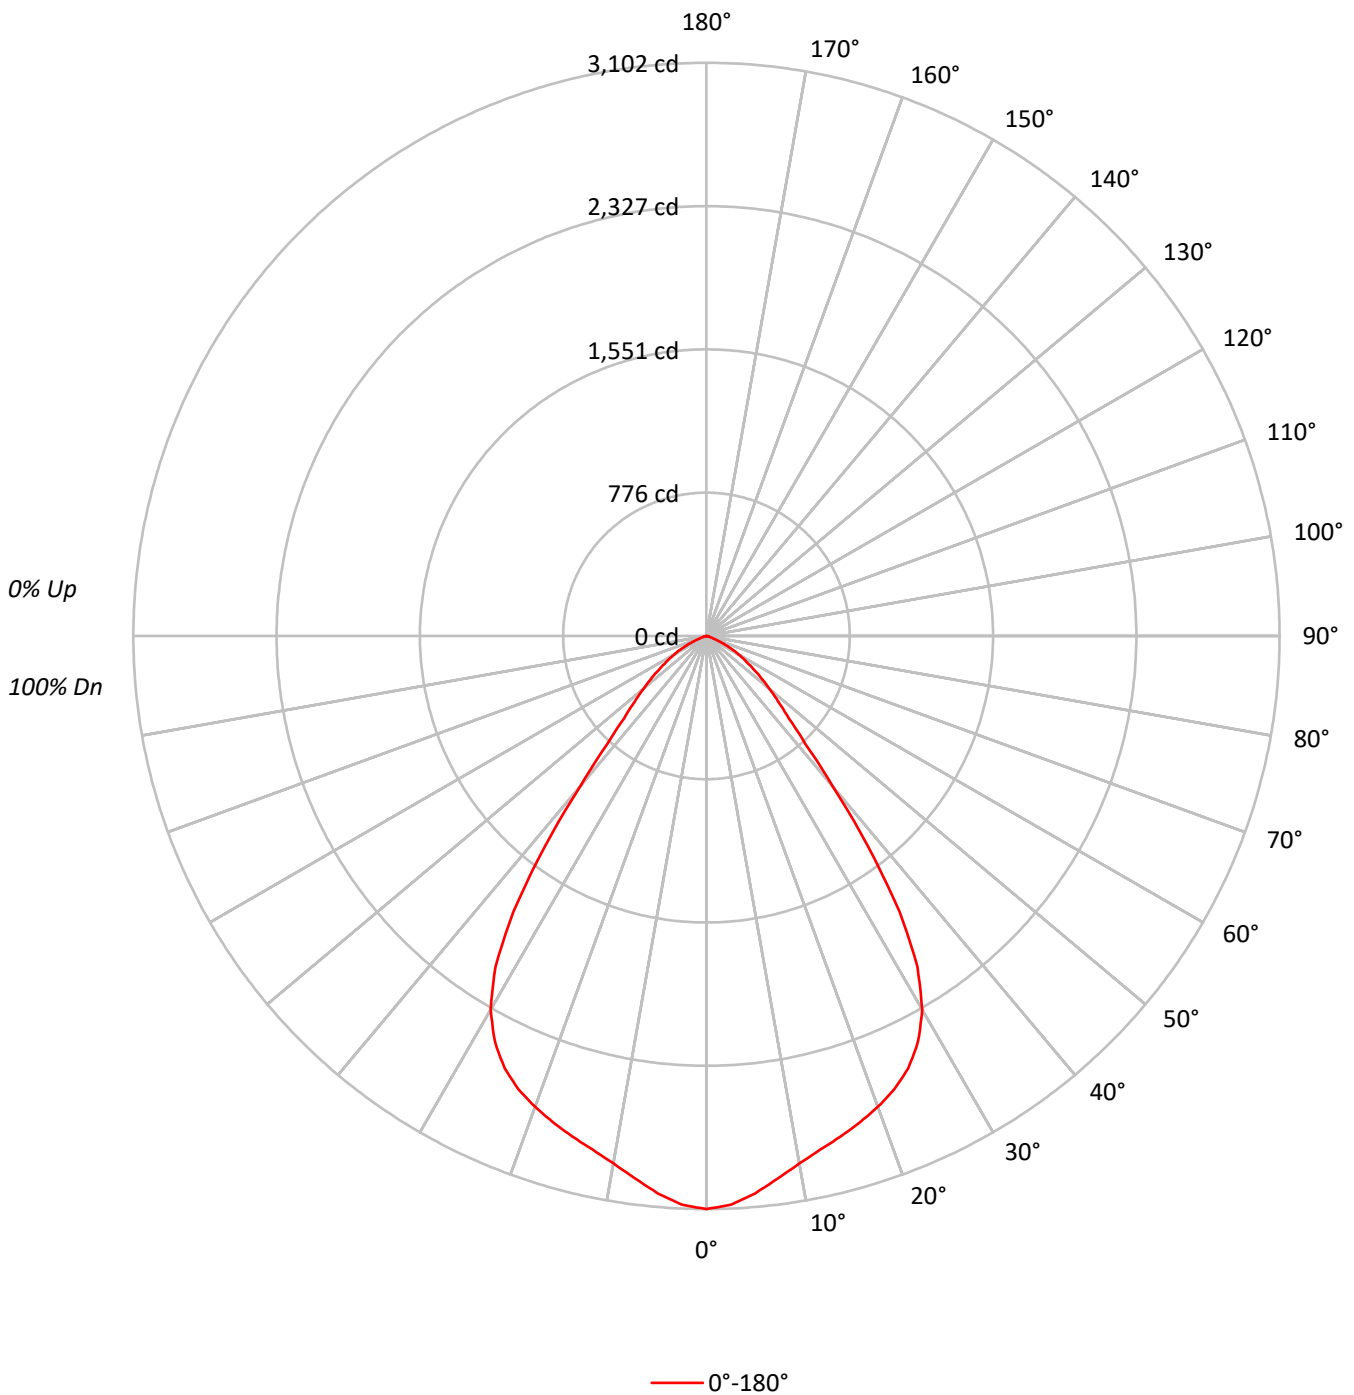



TEST NUMBER: P244678

CATALOG NUMBER: LD8B40D010 ER8B40835 8LBW0WMH

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	112	109	106	104	110	107	104	102	103	101	99		99	98	96		96	94	93	91
2	106	100	95	91	103	98	94	90	95	91	88		92	89	86		89	87	84	83
3	99	91	86	81	97	90	85	80	87	83	79		85	81	78		82	79	76	75
4	93	84	77	72	91	83	77	72	80	75	71		78	74	70		76	73	69	68
5	87	77	70	65	85	76	70	65	74	69	64		73	68	64		71	67	63	62
6	82	71	64	59	80	70	64	59	69	63	59		67	62	58		66	61	58	56
7	77	66	59	54	75	65	59	54	64	58	54		63	57	53		61	57	53	51
8	72	61	54	50	71	61	54	50	60	54	49		58	53	49		57	53	49	47
9	68	57	50	46	67	57	50	46	56	50	46		55	49	45		54	49	45	44
10	65	54	47	42	63	53	47	42	52	46	42		51	46	42		51	46	42	41

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	95645
5°	93723
10°	90755
15°	89531
20°	88998
25°	87874
30°	83149
35°	68580
40°	42822
45°	27535
50°	21353
55°	16440
60°	12452
65°	8092
70°	3462
75°	1692
80°	764
85°	495



TEST NUMBER: P244678

CATALOG NUMBER: LD8B40D010 ER8B40835 8LBW0WMH

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	284.8	6.7
10°-20°	792.3	18.5
20°-30°	1180.2	27.6
30°-40°	1096.0	25.6
40°-50°	517.6	12.1
50°-60°	278.1	6.5
60°-70°	111.7	2.6
70°-80°	17.6	0.4
80°-90°	1.7	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2257.3	52.7
0°-40°	3353.3	78.3
0°-60°	4149.0	96.9
0°-90°	4280.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	4280.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	3102	
5°	3028	285
15°	2804	792
25°	2583	1180
35°	1822	1096
45°	631	518
55°	306	278
65°	111	112
75°	14	18
85°	1	2
90°	0	



TEST NUMBER: P244678

CATALOG NUMBER: LD8B40D010 ER8B40835 8LBW0WMH

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	3101.7
2.5°	3080.4
5°	3027.8
7.5°	2960.9
10°	2898.4
12.5°	2847.2
15°	2804.5
17.5°	2760.4
20°	2712.1
22.5°	2656.6
25°	2582.7
27.5°	2478.8
30°	2335.2
32.5°	2124.7
35°	1821.8
37.5°	1435.0
40°	1063.8
42.5°	792.1
45°	631.4
47.5°	527.6
50°	445.1
52.5°	371.2
55°	305.8
57.5°	248.9
60°	201.9
62.5°	157.9
65°	110.9
67.5°	65.4
70°	38.4
72.5°	22.8
75°	14.2
77.5°	8.5
80°	4.3
82.5°	2.8
85°	1.4
87.5°	0.0
90°	0.0

(END OF REPORT)