

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: PORTFOLIO

Report Number: P243898

Luminaire Tested: **LD8B40D010 ER8B40850 8LBNOLI**

Issue Date: 03/03/2020

Test Information

Test Method: LM-79-08
Report Number: P243898
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-1801-521-10)
Test Lab: INNOVATION CENTER(G1)
Issue Date: 03/03/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LD8B40D010 ER8B40850 8LBN0LI
Description: PORTFOLIO 8 INCH NARROW DISTRIBUTION 50 DEGREE CUTOFF RECESSED
DOWNLIGHT
80 CRI 5000 CCT WITH SPECULAR CLEAR TRIM
Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 4249.0 lumens
Efficiency: N/A
Efficacy: 103.9 lumens/watt
Spacing Criteria (0/90/45): 0.25 / 0.25 / 0.32
Luminous Opening: Circular (Dia: 0.67' x H: 0')
CIE Type: Direct


Input Watts (W): 40.9
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P243898

CATALOG NUMBER: LD8B40D010 ER8B40850 8LBN0LI

Luminous Intensity Polar Plot

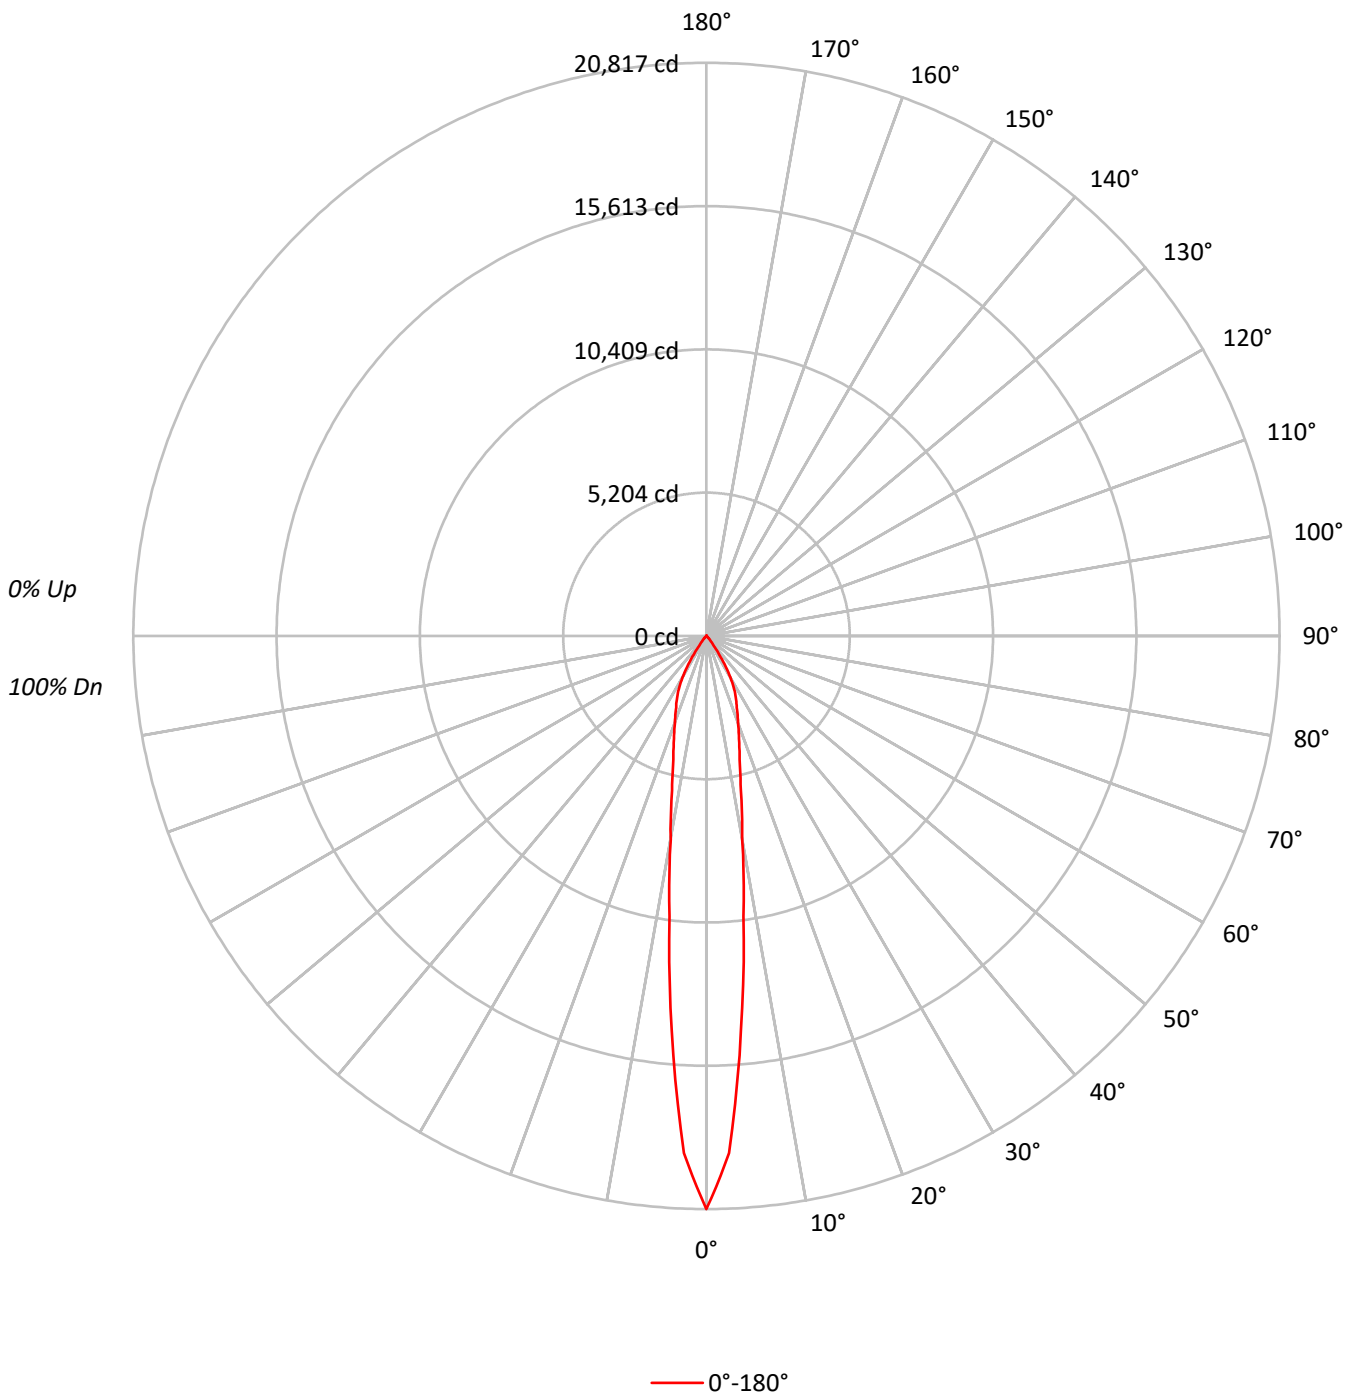



TEST NUMBER: P243898

CATALOG NUMBER: LD8B40D010 ER8B40850 8LBN0LI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20							
RC	80				70				50				30				10							
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10				
RCR																								
0	119	119	119	119	116	116	116	116	111	111	111	111	106	106	106	106	102	102	102	102	100	100	100	100
1	114	112	110	108	112	110	108	106	106	104	103	103	102	101	100	100	99	98	97	97	95	95	95	95
2	110	106	102	100	108	104	101	99	101	99	96	96	98	96	94	94	95	94	92	92	91	91	91	91
3	106	100	96	93	104	99	95	92	96	93	91	91	94	92	89	89	92	90	88	88	87	87	87	87
4	102	95	91	87	100	94	90	87	92	89	86	86	90	87	85	85	89	86	84	84	83	83	83	83
5	98	91	86	83	96	90	86	82	88	85	82	82	87	84	81	81	85	83	80	80	79	79	79	79
6	94	87	82	79	93	86	82	78	85	81	78	78	83	80	77	77	82	79	77	77	76	76	76	76
7	91	83	78	75	90	83	78	75	81	77	74	74	80	77	74	74	79	76	74	74	72	72	72	72
8	88	80	75	72	86	79	75	71	78	74	71	71	77	74	71	71	76	73	71	71	70	70	70	70
9	85	77	72	69	84	76	72	69	75	71	68	68	75	71	68	68	74	70	68	68	67	67	67	67
10	82	74	69	66	81	73	69	66	73	69	66	66	72	68	66	66	71	68	65	65	64	64	64	64

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	641929
5°	445851
10°	234618
15°	148444
20°	110315
25°	86727
30°	62440
35°	26795
40°	9339
45°	3580
50°	830
55°	312
60°	0
65°	423
70°	126
75°	346
80°	515
85°	0



TEST NUMBER: P243898

CATALOG NUMBER: LD8B40D010 ER8B40850 8LBN0LI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	1154.7	27.2
10°-20°	1341.7	31.6
20°-30°	1157.9	27.3
30°-40°	502.4	11.8
40°-50°	78.7	1.9
50°-60°	5.7	0.1
60°-70°	3.0	0.1
70°-80°	3.2	0.1
80°-90°	1.6	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	3654.4	86.0
0°-40°	4156.7	97.8
0°-60°	4241.1	99.8
0°-90°	4249.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	4249.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	20817	
5°	14404	###
15°	4650	1342
25°	2549	1158
35°	712	502
45°	82	79
55°	6	6
65°	6	3
75°	3	3
85°	0	2
90°	0	



TEST NUMBER: P243898

CATALOG NUMBER: LD8B40D010 ER8B40850 8LBN0LI

CANDELA DISTRIBUTION (FULL):

	0°
0°	20817.3
2.5°	18798.5
5°	14403.6
7.5°	10272.5
10°	7492.9
12.5°	5749.4
15°	4649.9
17.5°	3910.7
20°	3361.7
22.5°	2893.4
25°	2549.0
27.5°	2185.9
30°	1753.6
32.5°	1219.0
35°	711.8
37.5°	397.7
40°	232.0
42.5°	144.1
45°	82.1
47.5°	66.3
50°	17.3
52.5°	8.6
55°	5.8
57.5°	2.9
60°	0.0
62.5°	1.4
65°	5.8
67.5°	4.3
70°	1.4
72.5°	7.2
75°	2.9
77.5°	0.0
80°	2.9
82.5°	1.4
85°	0.0
87.5°	2.9
90°	0.0

(END OF REPORT)