

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions  
(formerly Eaton)

Brand: PORTFOLIO

Report Number: P244792

Luminaire Tested: **LD8B40D010 ER8B40950 8LBN0WMH**

Issue Date: 03/03/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P244792  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P201884)  
Test Lab: INNOVATION CENTER-P1  
Issue Date: 03/03/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: PORTFOLIO  
Catalog Number: LD8B40D010 ER8B40950 8LBN0WMH  
Description: PORTFOLIO 8 INCH NARROW DISTRIBUTION 50 DEGREE CUTOFF RECESSED  
DOWNLIGHT  
90 CRI 5000 CCT WITH WARM HAZE TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 3566.0 lumens  
Efficiency: N/A  
Efficacy: 87.2 lumens/watt  
Spacing Criteria (0/90/45): 0.74 / 0.74 / 0.79  
Luminous Opening: Circular (Dia: 0.67' x H: 0')  
CIE Type: Direct


Input Watts (W): 40.9  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P244792

CATALOG NUMBER: LD8B40D010 ER8B40950 8LBN0WMH

### Luminous Intensity Polar Plot

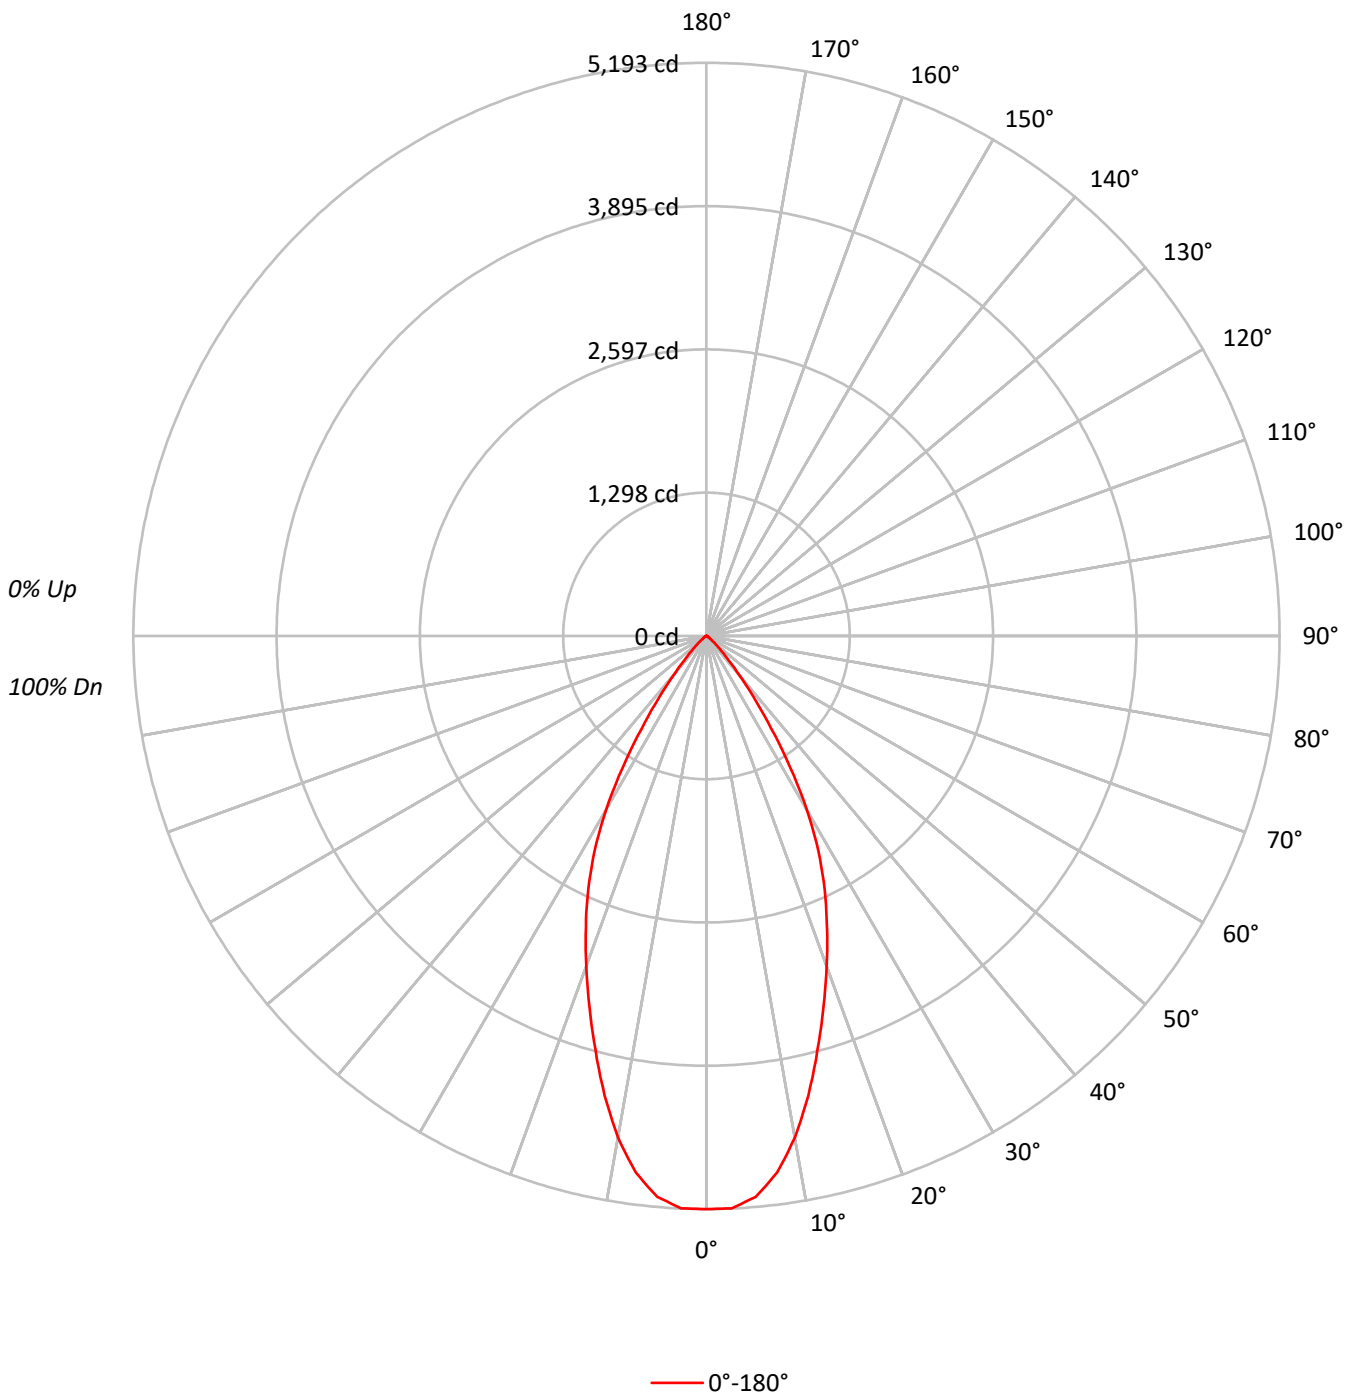



TEST NUMBER: P244792

CATALOG NUMBER: LD8B40D010 ER8B40950 8LBN0WMH

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	114	111	109	107	111	109	107	105	105	103	102	101	100	99	98	97	96	94
2	108	104	100	97	106	102	99	96	99	96	93	96	94	91	93	91	90	88
3	103	97	92	89	101	96	91	88	93	89	86	91	88	85	89	86	84	82
4	98	91	86	82	97	90	85	81	88	84	80	86	82	79	84	81	79	77
5	94	86	80	76	92	85	80	76	83	78	75	81	77	74	80	76	74	72
6	89	81	75	71	88	80	75	71	79	74	70	77	73	70	76	72	69	68
7	85	76	71	67	84	76	70	66	74	70	66	73	69	66	72	68	65	64
8	81	72	66	63	80	72	66	62	71	66	62	70	65	62	69	65	62	60
9	78	68	63	59	77	68	63	59	67	62	59	66	62	59	65	61	58	57
10	74	65	59	56	73	65	59	56	64	59	56	63	59	55	62	58	55	54

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	160142
5°	157909
10°	144483
15°	124047
20°	104458
25°	86285
30°	64737
35°	38585
40°	18376
45°	8007
50°	3612
55°	1586
60°	944
65°	518
70°	532
75°	0
80°	213
85°	849



TEST NUMBER: P244792

CATALOG NUMBER: LD8B40D010 ER8B40950 8LBN0WMH

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	471.1	13.2
10°-20°	1082.7	30.4
20°-30°	1148.8	32.2
30°-40°	655.5	18.4
40°-50°	162.5	4.6
50°-60°	31.9	0.9
60°-70°	9.6	0.3
70°-80°	2.2	0.1
80°-90°	1.8	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2702.6	75.8
0°-40°	3358.1	94.2
0°-60°	3552.5	99.6
0°-90°	3566.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	3566.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	5193	
5°	5101	471
15°	3886	1083
25°	2536	1149
35°	1025	655
45°	184	162
55°	30	32
65°	7	10
75°	0	2
85°	2	2
90°	0	0
95°	0	0
105°	0	0
115°	0	0
125°	0	0
135°	0	0
145°	0	0
155°	0	0
165°	0	0
175°	0	0
180°	0	0



TEST NUMBER: P244792

CATALOG NUMBER: LD8B40D010 ER8B40950 8LBN0WMH

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	5193.3
2.5°	5190.8
5°	5101.4
7.5°	4904.8
10°	4614.3
12.5°	4263.5
15°	3885.7
17.5°	3525.7
20°	3183.2
22.5°	2853.8
25°	2536.0
27.5°	2194.7
30°	1818.1
32.5°	1413.3
35°	1025.0
37.5°	706.1
40°	456.5
42.5°	289.5
45°	183.6
47.5°	120.1
50°	75.3
52.5°	45.8
55°	29.5
57.5°	23.6
60°	15.3
62.5°	14.1
65°	7.1
67.5°	7.1
70°	5.9
72.5°	3.5
75°	0.0
77.5°	1.2
80°	1.2
82.5°	2.4
85°	2.4
87.5°	1.2
90°	0.0
92.5°	0.0
95°	0.0
97.5°	0.0
100°	0.0
102.5°	0.0
105°	0.0
107.5°	0.0
110°	0.0



TEST NUMBER: P244792

CATALOG NUMBER: LD8B40D010 ER8B40950 8LBN0WMH

**CANDELA DISTRIBUTION (continued):**

	0°
112.5°	0.0
115°	0.0
117.5°	0.0
120°	0.0
122.5°	0.0
125°	0.0
127.5°	0.0
130°	0.0
132.5°	0.0
135°	0.0
137.5°	0.0
140°	0.0
142.5°	0.0
145°	0.0
147.5°	0.0
150°	0.0
152.5°	0.0
155°	0.0
157.5°	0.0
160°	0.0
162.5°	0.0
165°	0.0
167.5°	0.0
170°	0.0
172.5°	0.0
175°	0.0
177.5°	0.0
180°	0.0

(END OF REPORT)