

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions  
(formerly Eaton)

Brand: PORTFOLIO

Report Number: P244726

Luminaire Tested: **LD8B40D010 ER8B409727 8LBW0WMH**

Issue Date: 03/03/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P244726  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-1801-521-44)  
Test Lab: INNOVATION CENTER(G1)  
Issue Date: 03/03/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: PORTFOLIO  
Catalog Number: LD8B40D010 ER8B409727 8LBW0WMH  
Description: PORTFOLIO 8 INCH WIDE DISTRIBUTION 60 DEGREE CUTOFF RECESSED  
DOWNLIGHT  
97 CRI 2700 CCT WITH WARM HAZE TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 2979.9 lumens  
Efficiency: N/A  
Efficacy: 72.9 lumens/watt  
Spacing Criteria (0/90/45): 1.14 / 1.14 / 1.06  
Luminous Opening: Point Source (0' x 0' x 0')  
CIE Type: Direct


Input Watts (W): 40.9  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P244726

CATALOG NUMBER: LD8B40D010 ER8B409727 8LBW0WMH

### Luminous Intensity Polar Plot

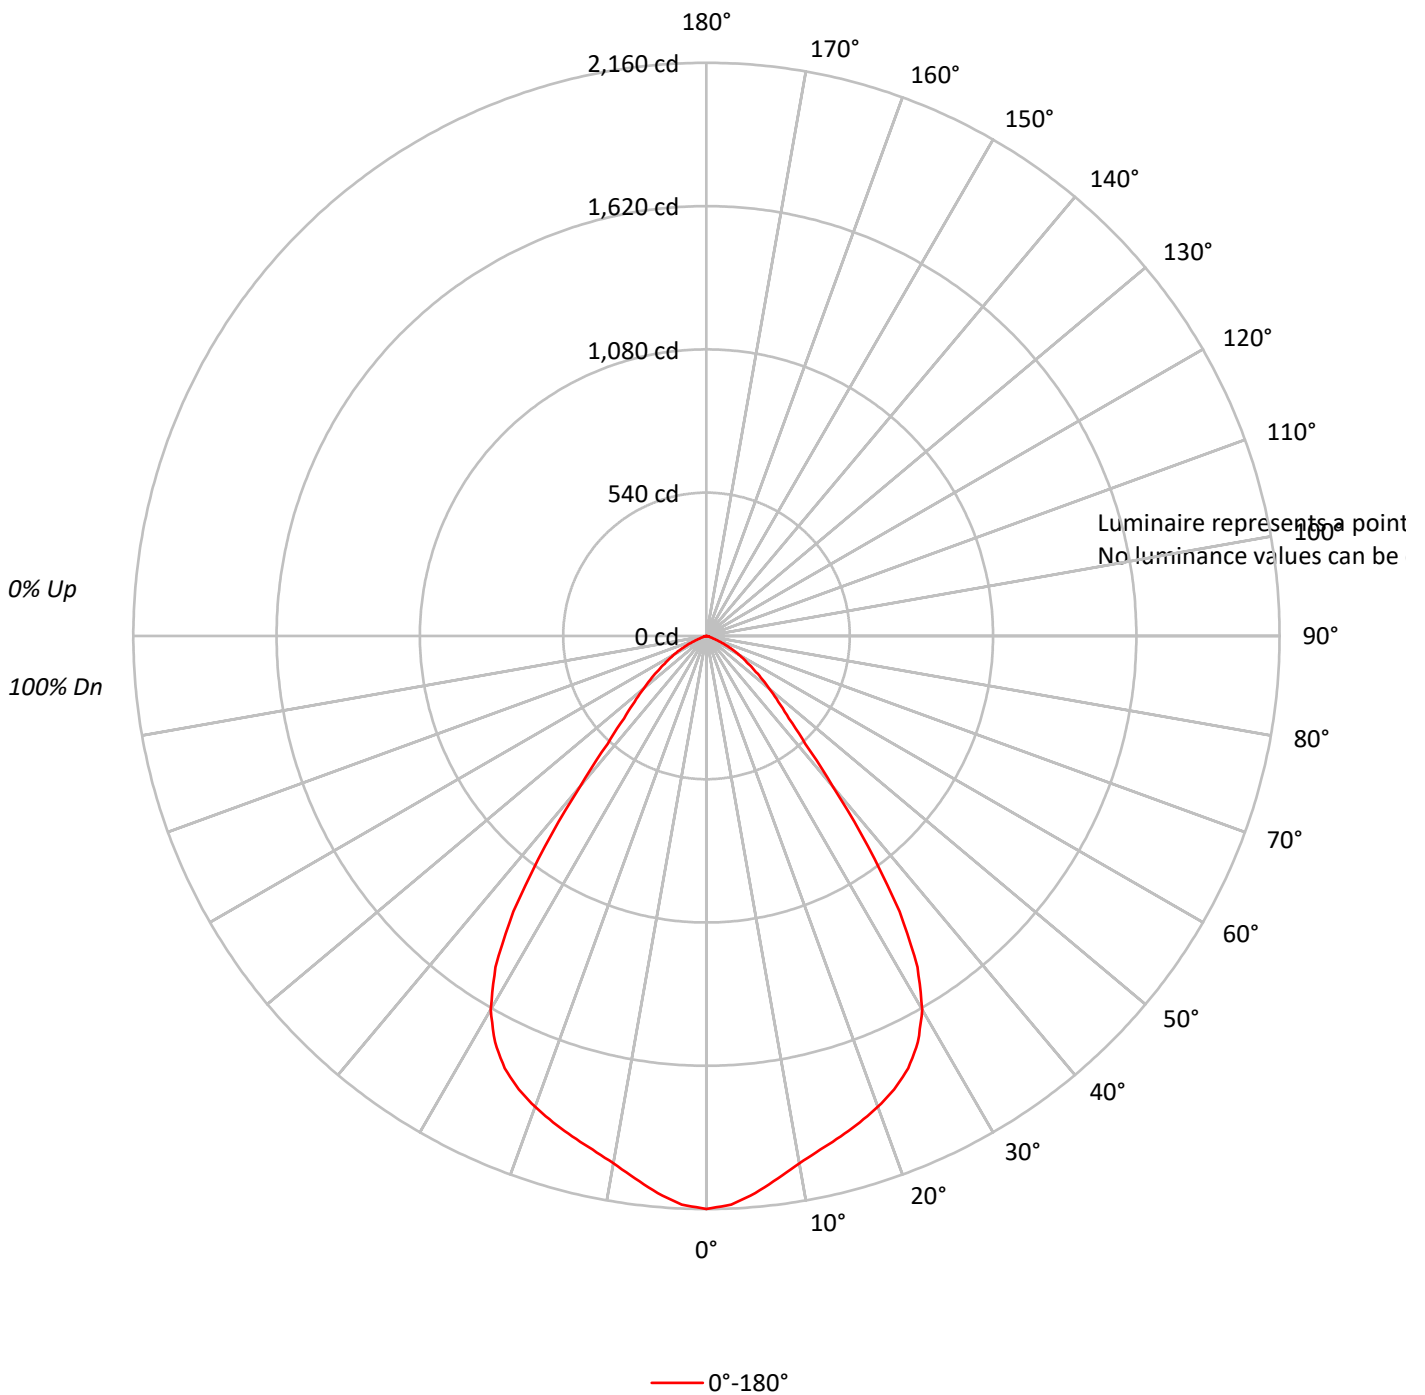



TEST NUMBER: P244726

CATALOG NUMBER: LD8B40D010 ER8B409727 8LBW0WMH

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	112	109	106	104	110	107	104	102	103	101	99	99	98	96	96	94	93	91
2	106	100	95	91	103	98	94	90	95	91	88	92	89	86	89	87	84	83
3	99	91	86	81	97	90	85	80	87	83	79	85	81	78	82	79	76	75
4	93	84	77	72	91	83	77	72	80	75	71	78	74	70	76	73	69	68
5	87	77	70	65	85	76	70	65	74	69	64	73	68	64	71	67	63	62
6	82	71	64	59	80	70	64	59	69	63	59	67	62	58	66	61	58	56
7	77	66	59	54	75	65	59	54	64	58	54	63	57	53	61	57	53	51
8	72	61	54	50	71	61	54	50	60	54	49	58	53	49	57	53	49	47
9	68	57	50	46	67	57	50	46	56	50	46	55	49	45	54	49	45	44
10	65	54	47	42	63	53	47	42	52	46	42	51	46	42	51	46	42	41

**AVERAGE LUMINANCE (cd/sqm):**





TEST NUMBER: P244726

CATALOG NUMBER: LD8B40D010 ER8B409727 8LBW0WMH

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	198.3	6.7
10°-20°	551.7	18.5
20°-30°	821.7	27.6
30°-40°	763.1	25.6
40°-50°	360.4	12.1
50°-60°	193.6	6.5
60°-70°	77.7	2.6
70°-80°	12.2	0.4
80°-90°	1.2	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1571.6	52.7
0°-40°	2334.7	78.3
0°-60°	2888.8	96.9
0°-90°	2979.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2979.9	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	2160	
5°	2108	198
15°	1953	552
25°	1798	822
35°	1268	763
45°	440	360
55°	213	194
65°	77	78
75°	10	12
85°	1	1
90°	0	



TEST NUMBER: P244726

CATALOG NUMBER: LD8B40D010 ER8B409727 8LBW0WMH

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	2159.6
2.5°	2144.8
5°	2108.1
7.5°	2061.6
10°	2018.0
12.5°	1982.4
15°	1952.7
17.5°	1922.0
20°	1888.3
22.5°	1849.7
25°	1798.2
27.5°	1725.9
30°	1625.9
32.5°	1479.4
35°	1268.4
37.5°	999.1
40°	740.7
42.5°	551.5
45°	439.6
47.5°	367.4
50°	309.9
52.5°	258.4
55°	212.9
57.5°	173.3
60°	140.6
62.5°	109.9
65°	77.2
67.5°	45.5
70°	26.7
72.5°	15.8
75°	9.9
77.5°	5.9
80°	3.0
82.5°	2.0
85°	1.0
87.5°	0.0
90°	0.0

(END OF REPORT)