

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: PORTFOLIO

Report Number: P243868

Luminaire Tested: **LD8B40D010 ER8B409730 8LBW0LI**

Issue Date: 03/03/2020

Test Information

Test Method: LM-79-08
Report Number: P243868
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P27941)
Test Lab: INNOVATION CENTER-P2
Issue Date: 03/03/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LD8B40D010 ER8B409730 8LBW0LI
Description: PORTFOLIO 8 INCH WIDE DISTRIBUTION 60 DEGREE CUTOFF RECESSED
DOWNLIGHT
97 CRI 3000 CCT WITH SPECULAR CLEAR TRIM
Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 3420.0 lumens
Efficiency: N/A
Efficacy: 83.6 lumens/watt
Spacing Criteria (0/90/45): 1.34 / 1.34 / 1.17
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 40.9
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P243868

CATALOG NUMBER: LD8B40D010 ER8B409730 8LBW0LI

Luminous Intensity Polar Plot

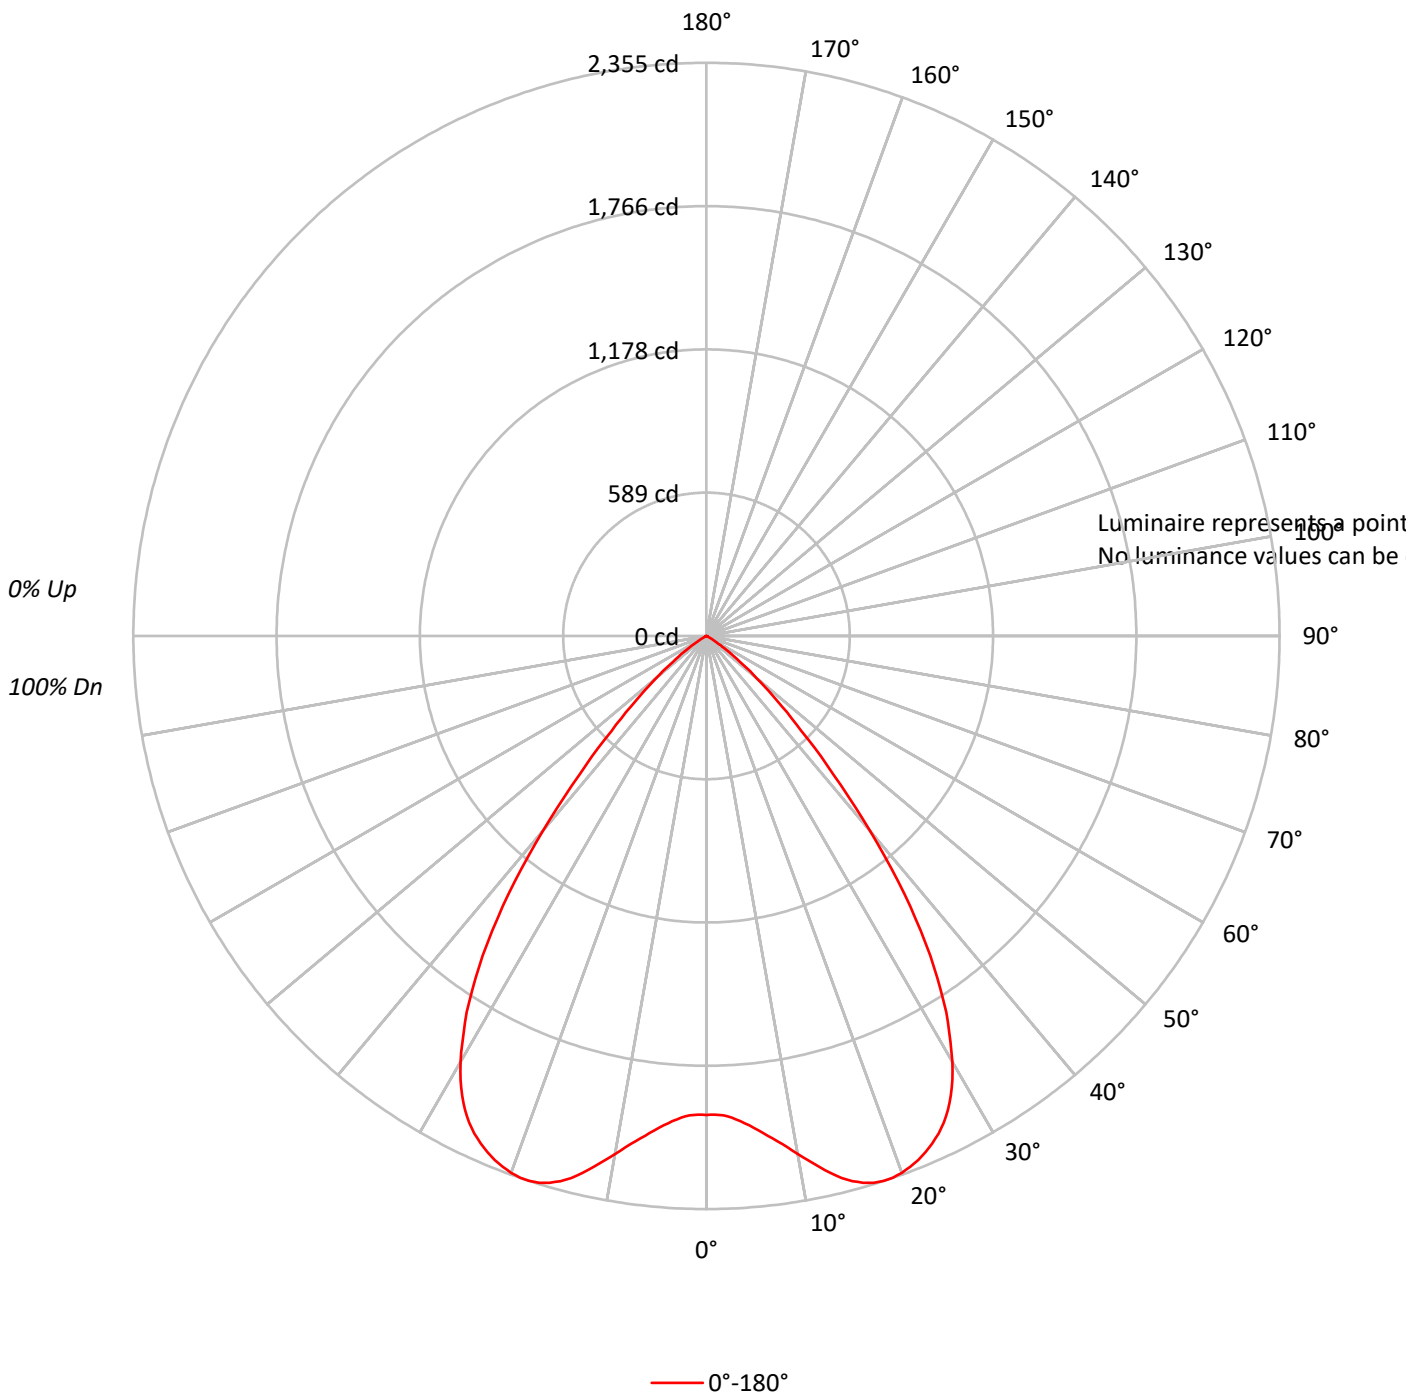



TEST NUMBER: P243868

CATALOG NUMBER: LD8B40D010 ER8B409730 8LBW0LI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	113	110	107	105	110	108	105	103	104	102	100		100	98	97		96	95	94	92
2	106	101	97	93	104	99	95	92	96	93	90		93	90	88		90	88	86	84
3	100	93	87	83	98	92	86	82	89	85	81		86	83	80		84	81	78	77
4	94	86	79	75	92	84	79	74	82	77	73		80	76	72		78	75	72	70
5	88	79	72	68	87	78	72	67	76	71	67		74	70	66		73	69	65	64
6	83	73	66	62	82	72	66	61	71	65	61		69	64	60		68	63	60	58
7	78	68	61	56	77	67	61	56	66	60	56		64	59	55		63	59	55	54
8	74	63	56	52	72	62	56	52	61	55	51		60	55	51		59	54	51	49
9	70	59	52	48	68	58	52	47	57	51	47		56	51	47		55	50	47	45
10	66	55	48	44	65	54	48	44	53	48	44		53	47	44		52	47	43	42

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P243868

CATALOG NUMBER: LD8B40D010 ER8B409730 8LBW0LI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	197.3	5.8
10°-20°	653.8	19.1
20°-30°	1028.7	30.1
30°-40°	978.5	28.6
40°-50°	451.1	13.2
50°-60°	102.5	3.0
60°-70°	6.7	0.2
70°-80°	1.3	0.0
80°-90°	0.1	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1879.7	55.0
0°-40°	2858.2	83.6
0°-60°	3411.8	99.8
0°-90°	3420.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	3420.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1968	
5°	2018	197
15°	2320	654
25°	2256	1029
35°	1604	978
45°	552	451
55°	99	103
65°	5	7
75°	1	1
85°	0	0
90°	0	



TEST NUMBER: P243868

CATALOG NUMBER: LD8B40D010 ER8B409730 8LBW0LI

CANDELA DISTRIBUTION (FULL):

0°	
0°	1967.8
1°	1966.8
2°	1970.6
3°	1981.8
4°	1998.6
5°	2018.3
6°	2042.6
7°	2068.8
8°	2096.0
9°	2127.8
10°	2161.4
11°	2195.1
12°	2230.7
13°	2264.4
14°	2295.3
15°	2319.6
16°	2337.4
17°	2349.5
18°	2355.1
19°	2354.2
20°	2347.7
21°	2336.4
22°	2322.4
23°	2303.7
24°	2282.2
25°	2256.0
26°	2225.1
27°	2185.8
28°	2139.0
29°	2084.7
30°	2022.0
32.5°	1834.0
35°	1603.8
37.5°	1336.2
40°	1044.2
42.5°	771.9
45°	552.1
47.5°	391.1
50°	269.5
52.5°	172.2
55°	99.2
57.5°	49.6
60°	21.5
62.5°	8.4
65°	4.7



TEST NUMBER: P243868

CATALOG NUMBER: LD8B40D010 ER8B409730 8LBW0LI

CANDELA DISTRIBUTION (continued):

	0°
67.5°	2.8
70°	1.9
72.5°	1.9
75°	0.9
77.5°	0.9
80°	0.9
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)