

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: PORTFOLIO

Report Number: P243881

Luminaire Tested: **LD8B50D010 ER8B50830 8LBNOLI**

Issue Date: 03/03/2020

Test Information

Test Method: LM-79-08
Report Number: P243881
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-1801-521-10)
Test Lab: INNOVATION CENTER(G1)
Issue Date: 03/03/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LD8B50D010 ER8B50830 8LBN0LI
Description: PORTFOLIO 8 INCH NARROW DISTRIBUTION 50 DEGREE CUTOFF RECESSED
DOWNLIGHT
80 CRI 3000 CCT WITH SPECULAR CLEAR TRIM
Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 5047.0 lumens
Efficiency: N/A
Efficacy: 95.2 lumens/watt
Spacing Criteria (0/90/45): 0.25 / 0.25 / 0.32
Luminous Opening: Circular (Dia: 0.67' x H: 0')
CIE Type: Direct


Input Watts (W): 53
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P243881

CATALOG NUMBER: LD8B50D010 ER8B50830 8LBN0LI

Luminous Intensity Polar Plot

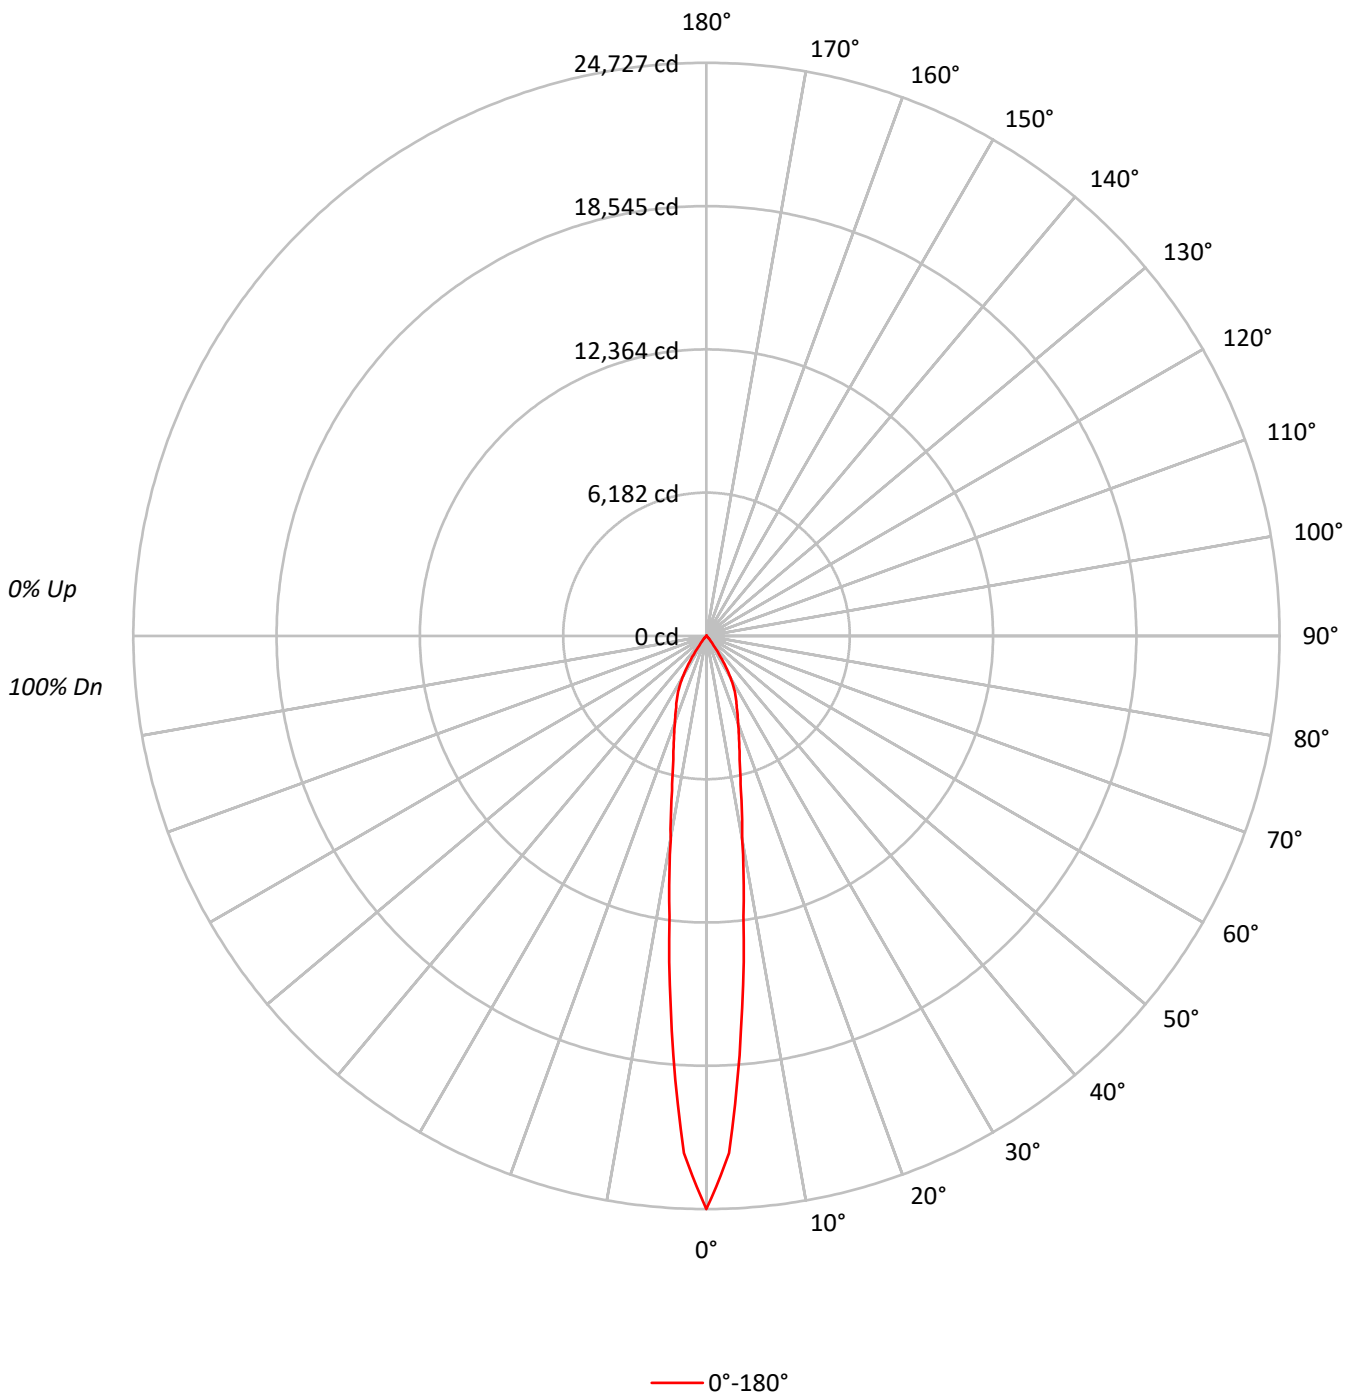



TEST NUMBER: P243881

CATALOG NUMBER: LD8B50D010 ER8B50830 8LBN0LI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	114	112	110	108	112	110	108	106	106	104	103	102	101	100	99	98	97	95
2	110	106	102	100	108	104	101	99	101	99	96	98	96	94	95	94	92	91
3	106	100	96	93	104	99	95	92	96	93	91	94	92	89	92	90	88	87
4	102	95	91	87	100	94	90	87	92	89	86	90	87	85	89	86	84	83
5	98	91	86	83	96	90	86	82	88	85	82	87	84	81	85	83	80	79
6	94	87	82	79	93	86	82	78	85	81	78	83	80	77	82	79	77	76
7	91	83	78	75	90	83	78	75	81	77	74	80	77	74	79	76	74	72
8	88	80	75	72	86	79	75	71	78	74	71	77	74	71	76	73	71	70
9	85	77	72	69	84	76	72	69	75	71	68	75	71	68	74	70	68	67
10	82	74	69	66	81	73	69	66	73	69	66	72	68	66	71	68	65	64

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	762486
5°	529588
10°	278680
15°	176323
20°	131035
25°	103018
30°	74169
35°	31828
40°	11094
45°	4256
50°	983
55°	366
60°	0
65°	496
70°	153
75°	405
80°	604
85°	0



TEST NUMBER: P243881

CATALOG NUMBER: LD8B50D010 ER8B50830 8LBN0LI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	1371.6	27.2
10°-20°	1593.6	31.6
20°-30°	1375.4	27.3
30°-40°	596.7	11.8
40°-50°	93.5	1.9
50°-60°	6.7	0.1
60°-70°	3.6	0.1
70°-80°	3.8	0.1
80°-90°	1.9	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	4340.7	86.0
0°-40°	4937.4	97.8
0°-60°	5037.7	99.8
0°-90°	5047.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	5047.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	24727	
5°	17109	###
15°	5523	1594
25°	3028	1375
35°	846	597
45°	98	94
55°	7	7
65°	7	4
75°	3	4
85°	0	2
90°	0	



TEST NUMBER: P243881

CATALOG NUMBER: LD8B50D010 ER8B50830 8LBN0LI

CANDELA DISTRIBUTION (FULL):

	0°
0°	24726.9
2.5°	22329.0
5°	17108.8
7.5°	12201.7
10°	8900.1
12.5°	6829.1
15°	5523.2
17.5°	4645.2
20°	3993.1
22.5°	3436.8
25°	3027.8
27.5°	2596.4
30°	2083.0
32.5°	1448.0
35°	845.5
37.5°	472.4
40°	275.6
42.5°	171.2
45°	97.6
47.5°	78.7
50°	20.5
52.5°	10.3
55°	6.8
57.5°	3.4
60°	0.0
62.5°	1.7
65°	6.8
67.5°	5.1
70°	1.7
72.5°	8.6
75°	3.4
77.5°	0.0
80°	3.4
82.5°	1.7
85°	0.0
87.5°	3.4
90°	0.0

(END OF REPORT)