

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions  
(formerly Eaton)

Brand: PORTFOLIO

Report Number: P244727

Luminaire Tested: **LD8B50D010 ER8B50927 8LBW0WMH**

Issue Date: 03/03/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P244727  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-1801-521-44)  
Test Lab: INNOVATION CENTER(G1)  
Issue Date: 03/03/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: PORTFOLIO  
Catalog Number: LD8B50D010 ER8B50927 8LBW0WMH  
Description: PORTFOLIO 8 INCH WIDE DISTRIBUTION 60 DEGREE CUTOFF RECESSED  
DOWNLIGHT  
97 CRI 2700 CCT WITH WARM HAZE TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 4195.1 lumens  
Efficiency: N/A  
Efficacy: 79.2 lumens/watt  
Spacing Criteria (0/90/45): 1.14 / 1.14 / 1.06  
Luminous Opening: Point Source (0' x 0' x 0')  
CIE Type: Direct


Input Watts (W): 53  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P244727

CATALOG NUMBER: LD8B50D010 ER8B50927 8LBW0WMH

### Luminous Intensity Polar Plot

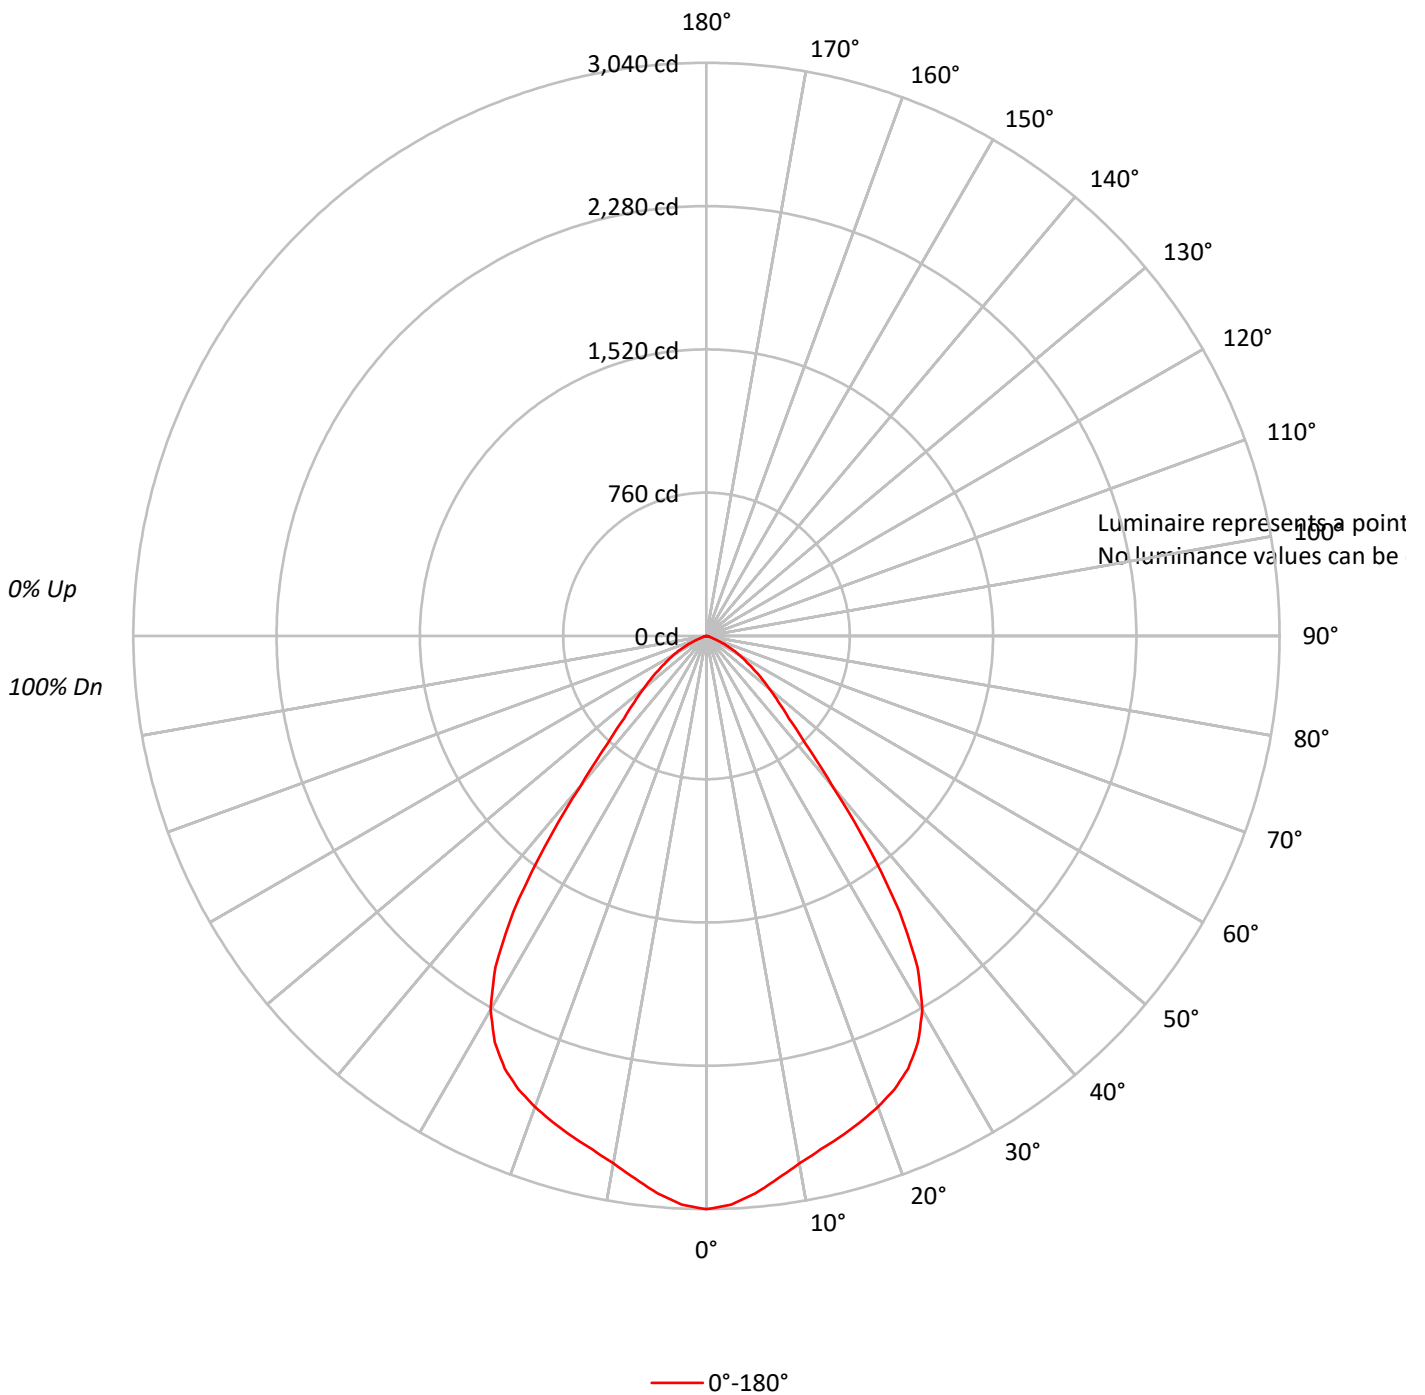



TEST NUMBER: P244727

CATALOG NUMBER: LD8B50D010 ER8B50927 8LBW0WMH

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	112	109	106	104	110	107	104	102	103	101	99	99	98	96	96	94	93	91
2	106	100	95	91	103	98	94	90	95	91	88	92	89	86	89	87	84	83
3	99	91	86	81	97	90	85	80	87	83	79	85	81	78	82	79	76	75
4	93	84	77	72	91	83	77	72	80	75	71	78	74	70	76	73	69	68
5	87	77	70	65	85	76	70	65	74	69	64	73	68	64	71	67	63	62
6	82	71	64	59	80	70	64	59	69	63	59	67	62	58	66	61	58	56
7	77	66	59	54	75	65	59	54	64	58	54	63	57	53	61	57	53	51
8	72	61	54	50	71	61	54	50	60	54	49	58	53	49	57	53	49	47
9	68	57	50	46	67	57	50	46	56	50	46	55	49	45	54	49	45	44
10	65	54	47	42	63	53	47	42	52	46	42	51	46	42	51	46	42	41

**AVERAGE LUMINANCE (cd/sqm):**





TEST NUMBER: P244727

CATALOG NUMBER: LD8B50D010 ER8B50927 8LBW0WMH

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	279.1	6.7
10°-20°	776.6	18.5
20°-30°	1156.8	27.6
30°-40°	1074.3	25.6
40°-50°	507.4	12.1
50°-60°	272.6	6.5
60°-70°	109.4	2.6
70°-80°	17.2	0.4
80°-90°	1.7	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2212.5	52.7
0°-40°	3286.8	78.3
0°-60°	4066.8	96.9
0°-90°	4195.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	4195.1	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	3040	
5°	2968	279
15°	2749	777
25°	2532	1157
35°	1786	1074
45°	619	507
55°	300	273
65°	109	109
75°	14	17
85°	1	2
90°	0	



TEST NUMBER: P244727

CATALOG NUMBER: LD8B50D010 ER8B50927 8LBW0WMH

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	3040.2
2.5°	3019.3
5°	2967.8
7.5°	2902.3
10°	2840.8
12.5°	2790.7
15°	2748.9
17.5°	2705.7
20°	2658.3
22.5°	2603.9
25°	2531.5
27.5°	2429.7
30°	2288.9
32.5°	2082.6
35°	1785.7
37.5°	1406.5
40°	1042.6
42.5°	776.5
45°	619.0
47.5°	517.2
50°	436.3
52.5°	363.8
55°	299.7
57.5°	243.9
60°	197.9
62.5°	154.7
65°	108.7
67.5°	64.1
70°	37.7
72.5°	22.3
75°	14.0
77.5°	8.3
80°	4.2
82.5°	2.8
85°	1.3
87.5°	0.0
90°	0.0

(END OF REPORT)