

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions  
(formerly Eaton)

Brand: PORTFOLIO

Report Number: P244925

Luminaire Tested: **LD8B50D010 ER8B50935 8LBS0WMH**

Issue Date: 03/03/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P244925  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-1801-521-14)  
Test Lab: INNOVATION CENTER(G1)  
Issue Date: 03/03/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: PORTFOLIO  
Catalog Number: LD8B50D010 ER8B50935 8LBS0WMH  
Description: PORTFOLIO 8 INCH WIDE SHALLOW DISTRIBUTION 75 DEGREE CUTOFF RECESSED  
DOWNLIGHT  
90 CRI 3500 CCT WITH WARM HAZE TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 5046.0 lumens  
Efficiency: N/A  
Efficacy: 95.2 lumens/watt  
Spacing Criteria (0/90/45): 1.19 / 1.19 / 1.25  
Luminous Opening: Circular (Dia: 0.67' x H: 0')  
CIE Type: Direct


Input Watts (W): 53  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P244925

CATALOG NUMBER: LD8B50D010 ER8B50935 8LBS0WMH

### Luminous Intensity Polar Plot

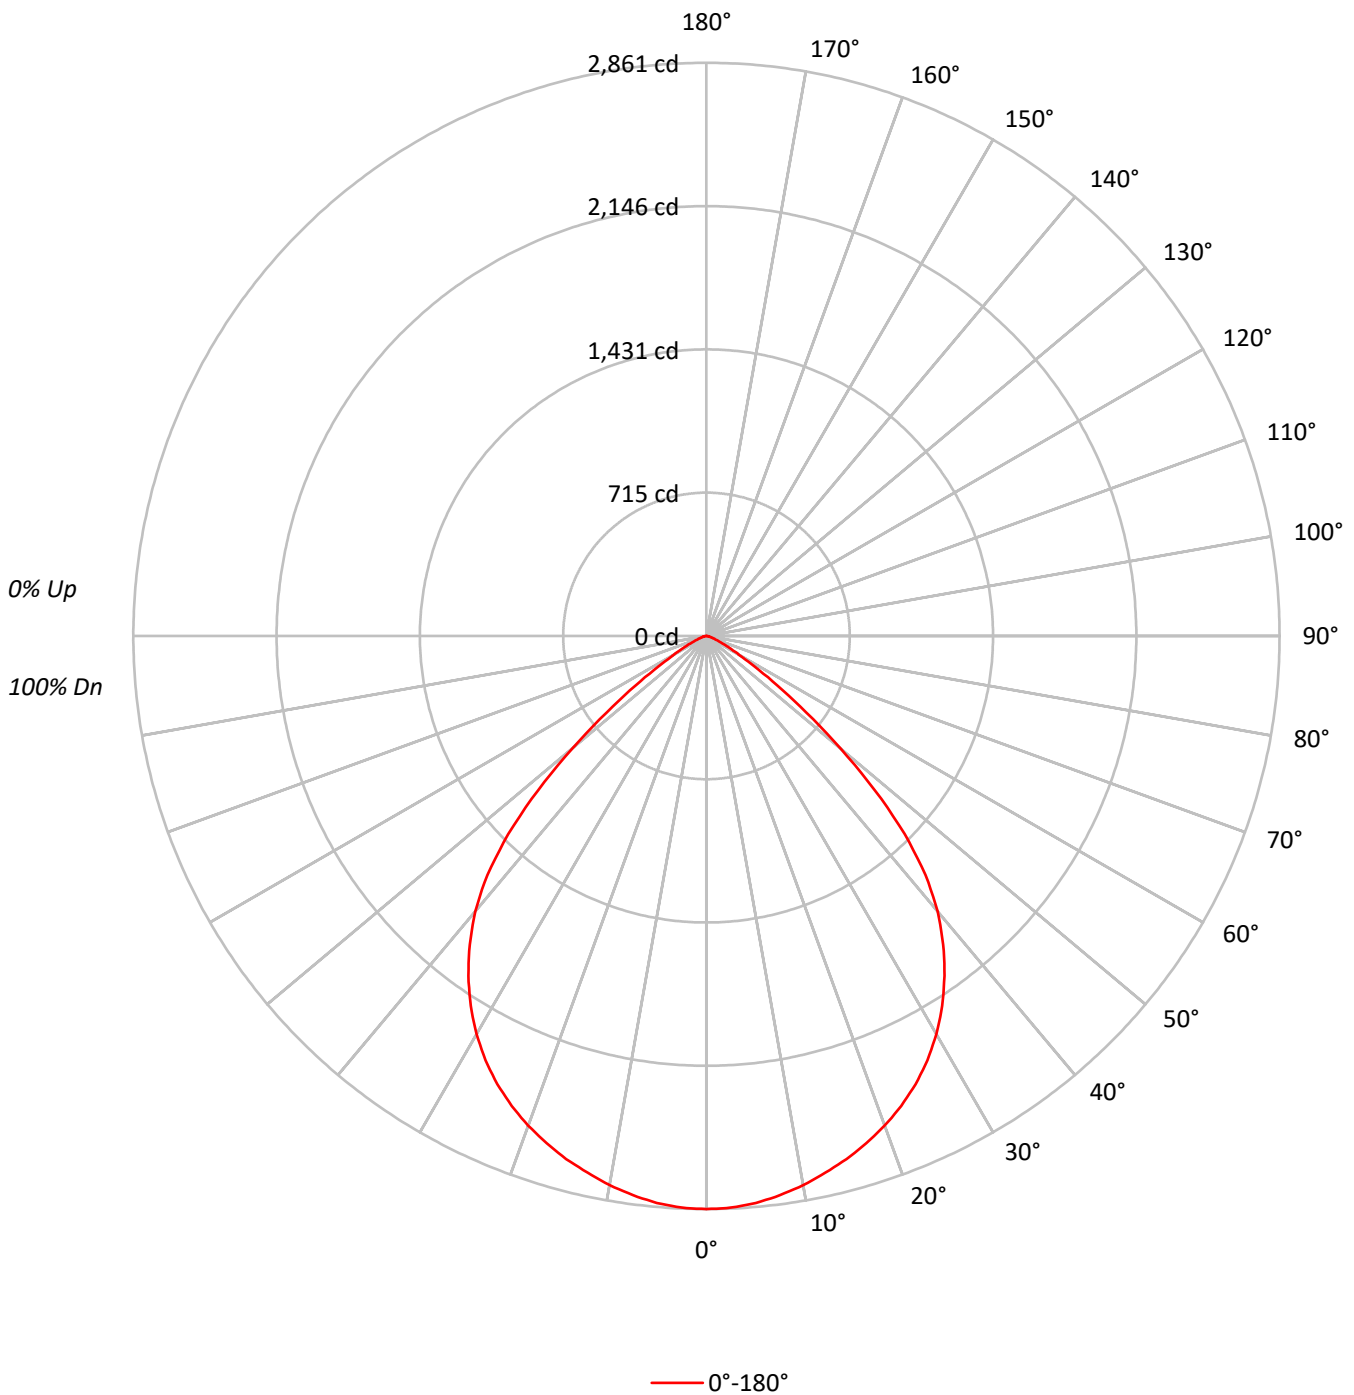



TEST NUMBER: P244925

CATALOG NUMBER: LD8B50D010 ER8B50935 8LBS0WMH

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	112	109	106	103	110	107	104	101	102	100	98		99	97	95		95	94	92	91
2	105	99	94	89	102	97	92	88	94	90	86		90	87	85		88	85	83	81
3	98	90	83	78	95	88	82	78	85	80	76		83	79	75		80	77	74	72
4	91	82	75	69	89	80	74	69	78	72	68		76	71	67		74	70	66	65
5	85	74	67	62	83	73	67	61	71	65	61		70	64	60		68	63	60	58
6	79	68	61	55	77	67	60	55	66	59	55		64	58	54		63	58	54	52
7	74	63	55	50	72	62	55	50	60	54	49		59	53	49		58	53	49	47
8	69	58	50	45	68	57	50	45	56	49	45		55	49	45		54	48	45	43
9	65	53	46	41	64	53	46	41	52	45	41		51	45	41		50	45	41	39
10	61	50	43	38	60	49	42	38	48	42	38		47	42	38		46	41	37	36

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	88223
5°	87950
10°	87160
15°	86297
20°	85369
25°	84019
30°	81714
35°	77991
40°	72276
45°	61027
50°	41866
55°	23091
60°	11607
65°	6530
70°	3561
75°	2526
80°	1616
85°	1061



TEST NUMBER: P244925

CATALOG NUMBER: LD8B50D010 ER8B50935 8LBS0WMH

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	269.3	5.3
10°-20°	762.4	15.1
20°-30°	1135.0	22.5
30°-40°	1289.3	25.6
40°-50°	1053.9	20.9
50°-60°	413.0	8.2
60°-70°	96.2	1.9
70°-80°	23.2	0.5
80°-90°	3.7	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2166.7	42.9
0°-40°	3456.0	68.5
0°-60°	4922.9	97.6
0°-90°	5046.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	5046.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	2861	
5°	2841	269
15°	2703	762
25°	2469	1135
35°	2072	1289
45°	1399	1054
55°	430	413
65°	90	96
75°	21	23
85°	3	4
90°	0	



TEST NUMBER: P244925

CATALOG NUMBER: LD8B50D010 ER8B50935 8LBS0WMH

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	2861.0
2.5°	2856.5
5°	2841.3
7.5°	2815.5
10°	2783.6
12.5°	2744.1
15°	2703.2
17.5°	2654.6
20°	2601.5
22.5°	2539.2
25°	2469.4
27.5°	2387.5
30°	2294.9
32.5°	2190.1
35°	2071.8
37.5°	1941.2
40°	1795.5
42.5°	1619.5
45°	1399.4
47.5°	1141.4
50°	872.7
52.5°	626.8
55°	429.5
57.5°	280.8
60°	188.2
62.5°	129.0
65°	89.5
67.5°	59.2
70°	39.5
72.5°	27.3
75°	21.2
77.5°	15.2
80°	9.1
82.5°	4.6
85°	3.0
87.5°	1.5
90°	0.0

(END OF REPORT)