

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions  
(formerly Eaton)

Brand: PORTFOLIO

Report Number: P251080

Luminaire Tested: **LD8B60D010 ER8B60827 8LBS0WMH**

Issue Date: 03/03/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P251080  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-1801-521-14)  
Test Lab: INNOVATION CENTER(G1)  
Issue Date: 03/03/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: PORTFOLIO  
Catalog Number: LD8B60D010 ER8B60827 8LBS0WMH  
Description: PORTFOLIO 8 INCH WIDE SHALLOW DISTRIBUTION 75 DEGREE CUTOFF RECESSED  
DOWNLIGHT  
80 CRI 2700 CCT WITH WARM HAZE TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 6289.0 lumens  
Efficiency: N/A  
Efficacy: 105.7 lumens/watt  
Spacing Criteria (0/90/45): 1.19 / 1.19 / 1.25  
Luminous Opening: Circular (Dia: 0.67' x H: 0')  
CIE Type: Direct


Input Watts (W): 59.5  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P251080

CATALOG NUMBER: LD8B60D010 ER8B60827 8LBS0WMH

### Luminous Intensity Polar Plot

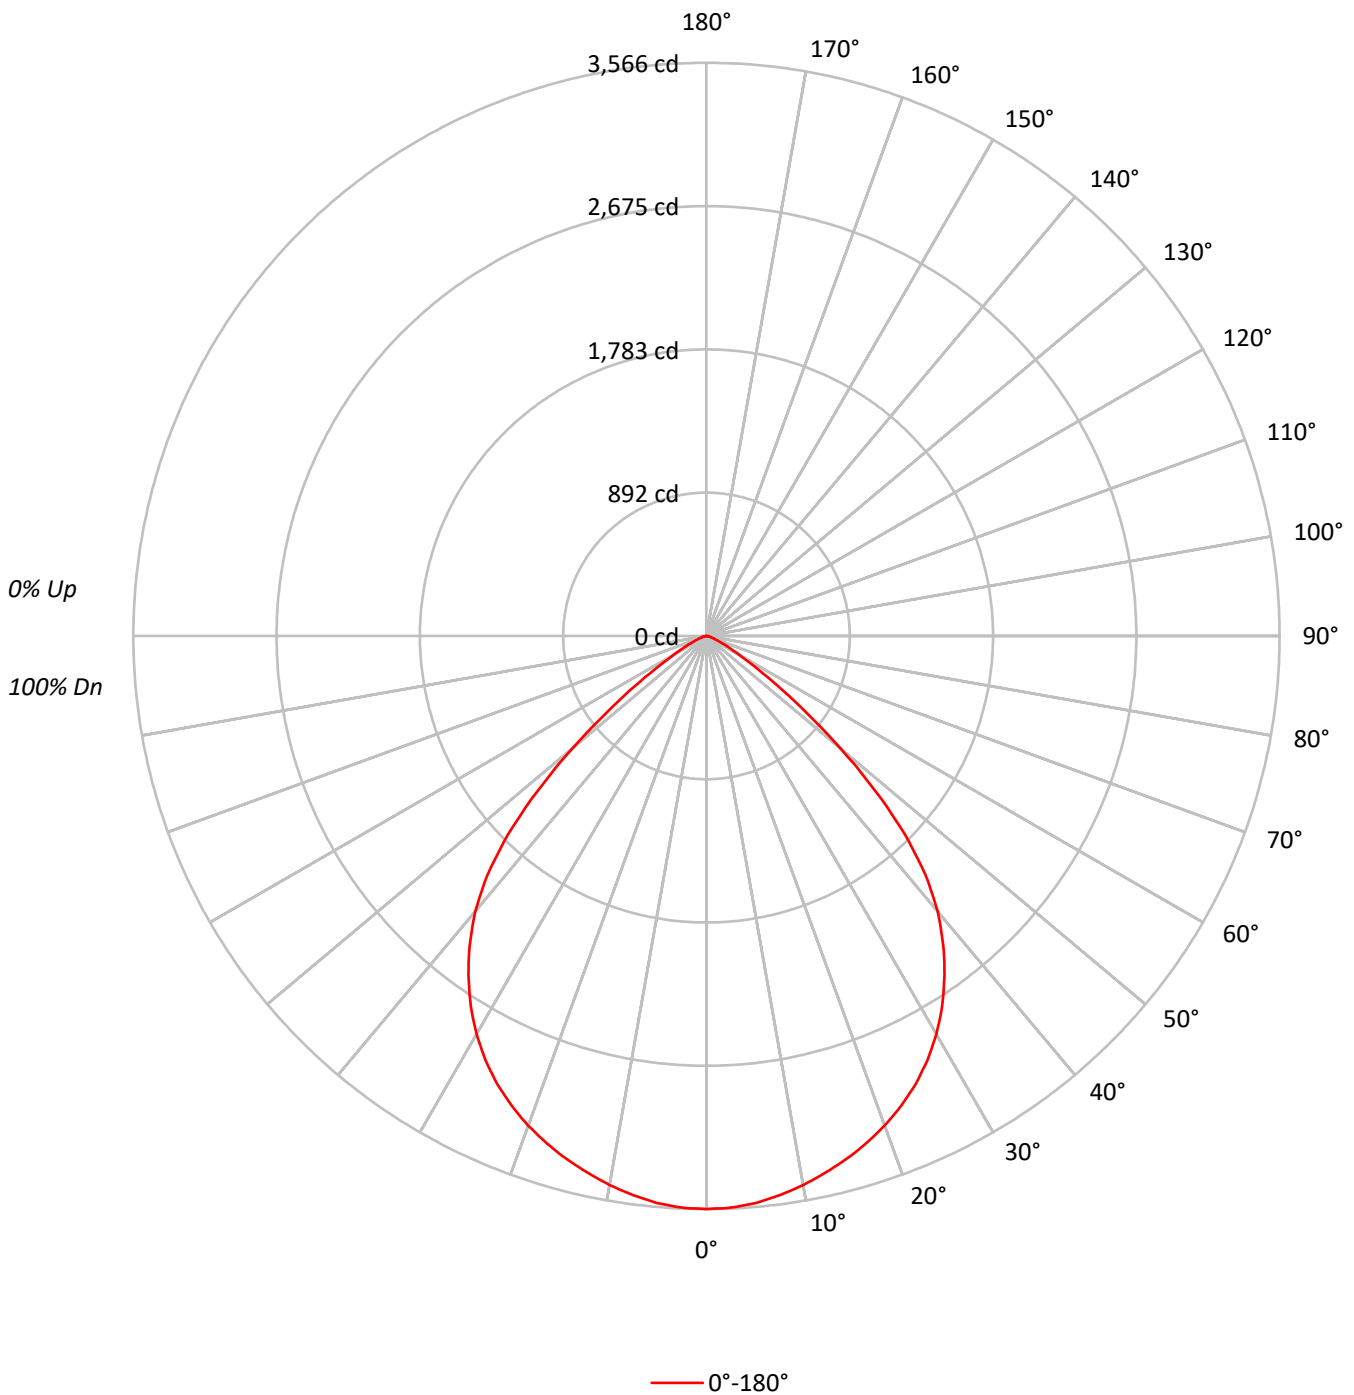



TEST NUMBER: P251080

CATALOG NUMBER: LD8B60D010 ER8B60827 8LBS0WMH

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	112	109	106	103	110	107	104	101	102	100	98	99	97	95	95	94	92	91
2	105	99	94	89	102	97	92	88	94	90	86	90	87	85	88	85	83	81
3	98	90	83	78	95	88	82	78	85	80	76	83	79	75	80	77	74	72
4	91	82	75	69	89	80	74	69	78	72	68	76	71	67	74	70	66	65
5	85	74	67	62	83	73	67	61	71	65	61	70	64	60	68	63	60	58
6	79	68	61	55	77	67	60	55	66	59	55	64	58	54	63	58	54	52
7	74	63	55	50	72	62	55	50	60	54	49	59	53	49	58	53	49	47
8	69	58	50	45	68	57	50	45	56	49	45	55	49	45	54	48	45	43
9	65	53	46	41	64	53	46	41	52	45	41	51	45	41	50	45	41	39
10	61	50	43	38	60	49	42	38	48	42	38	47	42	38	46	41	37	36

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	109956
5°	109615
10°	108631
15°	107552
20°	106397
25°	104716
30°	101842
35°	97201
40°	90080
45°	76059
50°	52180
55°	28779
60°	14468
65°	8143
70°	4436
75°	3157
80°	2007
85°	1344



TEST NUMBER: P251080

CATALOG NUMBER: LD8B60D010 ER8B60827 8LBS0WMH

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	335.7	5.3
10°-20°	950.1	15.1
20°-30°	1414.6	22.5
30°-40°	1606.9	25.6
40°-50°	1313.5	20.9
50°-60°	514.7	8.2
60°-70°	120.0	1.9
70°-80°	28.9	0.5
80°-90°	4.6	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2700.4	42.9
0°-40°	4307.3	68.5
0°-60°	6135.5	97.6
0°-90°	6289.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	6289.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	3566	
5°	3541	336
15°	3369	950
25°	3078	1415
35°	2582	1607
45°	1744	1313
55°	535	515
65°	112	120
75°	26	29
85°	4	5
90°	0	



TEST NUMBER: P251080

CATALOG NUMBER: LD8B60D010 ER8B60827 8LBS0WMH

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	3565.8
2.5°	3560.1
5°	3541.2
7.5°	3509.0
10°	3469.3
12.5°	3420.1
15°	3369.0
17.5°	3308.5
20°	3242.3
22.5°	3164.7
25°	3077.7
27.5°	2975.6
30°	2860.2
32.5°	2729.7
35°	2582.1
37.5°	2419.4
40°	2237.8
42.5°	2018.4
45°	1744.1
47.5°	1422.5
50°	1087.7
52.5°	781.3
55°	535.3
57.5°	350.0
60°	234.6
62.5°	160.8
65°	111.6
67.5°	73.8
70°	49.2
72.5°	34.0
75°	26.5
77.5°	18.9
80°	11.3
82.5°	5.7
85°	3.8
87.5°	1.9
90°	0.0

(END OF REPORT)