

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: PORTFOLIO

Report Number: P251100

Luminaire Tested: **LD8B60D010 ER8B609727 8LBS0WMH**

Issue Date: 03/03/2020

Test Information

Test Method: LM-79-08
Report Number: P251100
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-1801-521-14)
Test Lab: INNOVATION CENTER(G1)
Issue Date: 03/03/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LD8B60D010 ER8B609727 8LBS0WMH
Description: PORTFOLIO 8 INCH WIDE SHALLOW DISTRIBUTION 75 DEGREE CUTOFF RECESSED
DOWNLIGHT
97 CRI 2700 CCT WITH WARM HAZE TRIM
Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 4668.0 lumens
Efficiency: N/A
Efficacy: 78.5 lumens/watt
Spacing Criteria (0/90/45): 1.19 / 1.19 / 1.25
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 59.5
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P251100

CATALOG NUMBER: LD8B60D010 ER8B609727 8LBS0WMH

Luminous Intensity Polar Plot

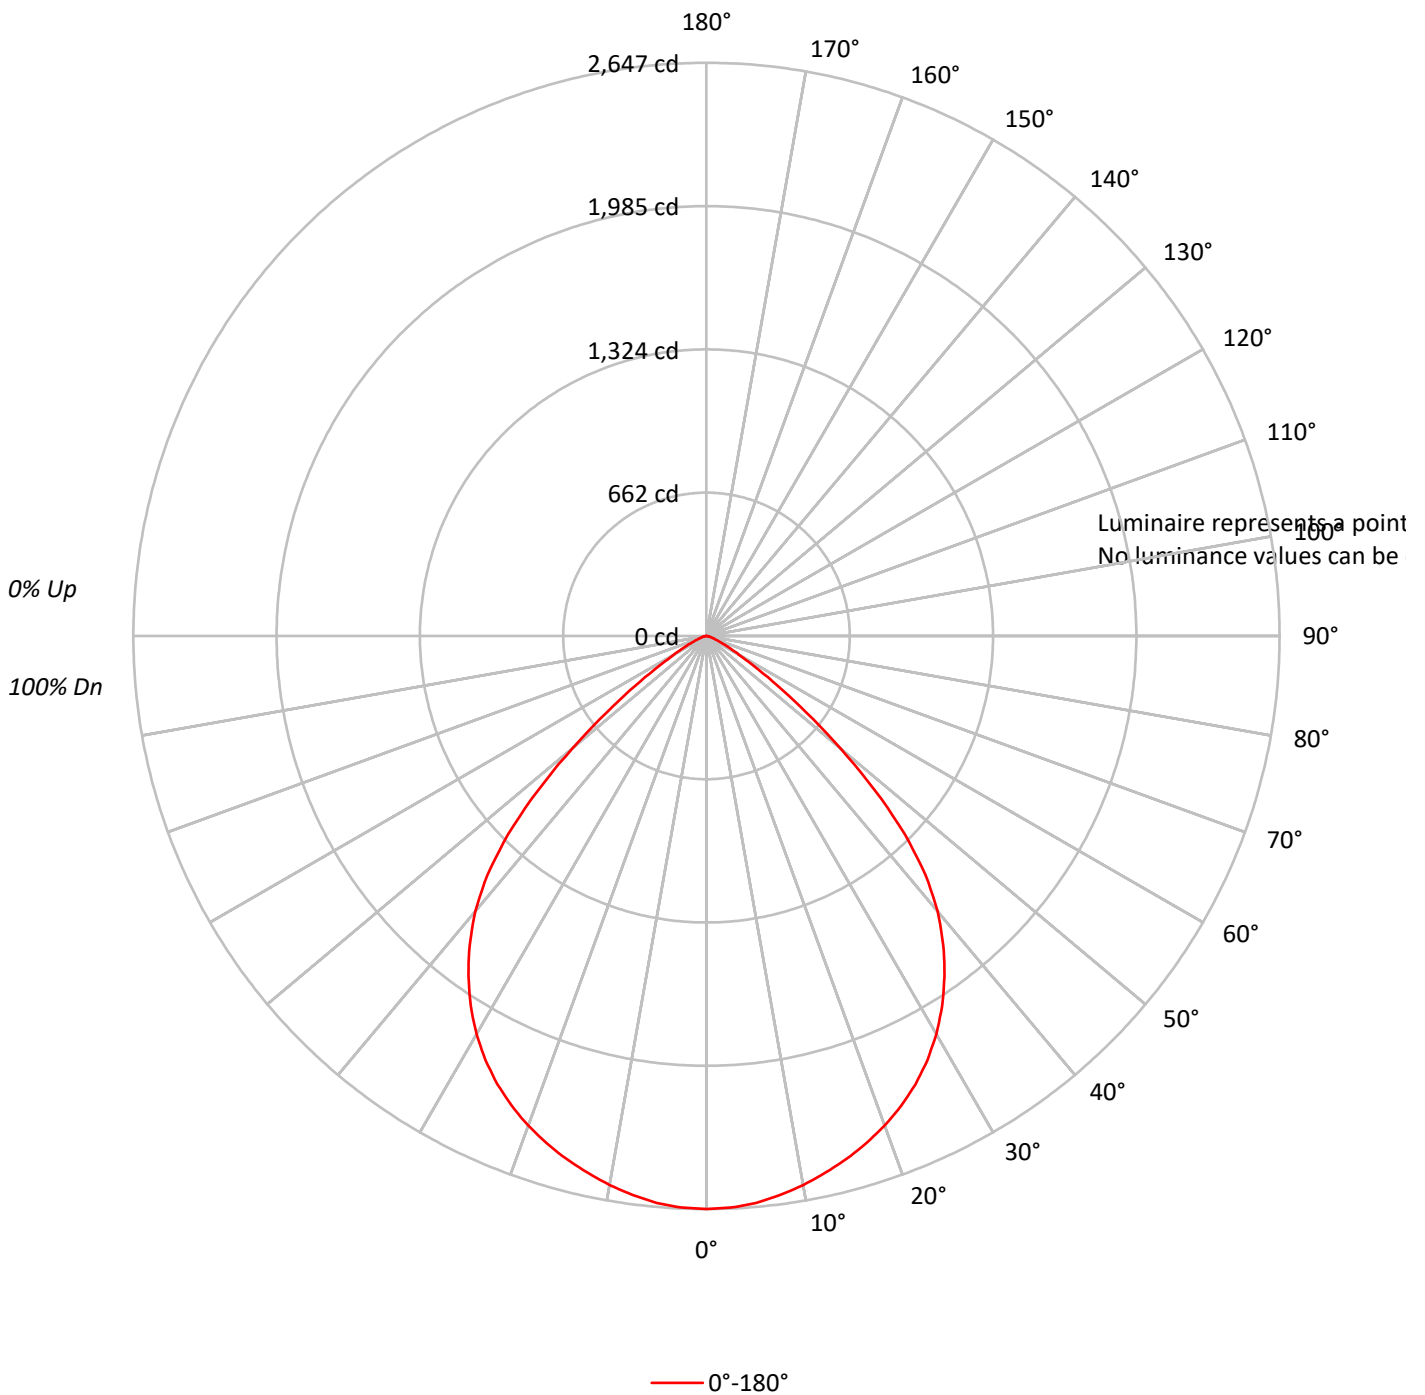



TEST NUMBER: P251100

CATALOG NUMBER: LD8B60D010 ER8B609727 8LBS0WMH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	112	109	106	103	110	107	104	101	102	100	98	99	97	95	95	94	92	91
2	105	99	94	89	102	97	92	88	94	90	86	90	87	85	88	85	83	81
3	98	90	83	78	95	88	82	78	85	80	76	83	79	75	80	77	74	72
4	91	82	75	69	89	80	74	69	78	72	68	76	71	67	74	70	66	65
5	85	74	67	62	83	73	67	61	71	65	61	70	64	60	68	63	60	58
6	79	68	61	55	77	67	60	55	66	59	55	64	58	54	63	58	54	52
7	74	63	55	50	72	62	55	50	60	54	49	59	53	49	58	53	49	47
8	69	58	50	45	68	57	50	45	56	49	45	55	49	45	54	48	45	43
9	65	53	46	41	64	53	46	41	52	45	41	51	45	41	50	45	41	39
10	61	50	43	38	60	49	42	38	48	42	38	47	42	38	46	41	37	36

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P251100

CATALOG NUMBER: LD8B60D010 ER8B609727 8LBS0WMH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	249.2	5.3
10°-20°	705.2	15.1
20°-30°	1050.0	22.5
30°-40°	1192.7	25.6
40°-50°	975.0	20.9
50°-60°	382.1	8.2
60°-70°	89.0	1.9
70°-80°	21.4	0.5
80°-90°	3.4	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2004.4	42.9
0°-40°	3197.1	68.5
0°-60°	4554.1	97.6
0°-90°	4668.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	4668.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2647	
5°	2628	249
15°	2501	705
25°	2284	1050
35°	1917	1193
45°	1295	975
55°	397	382
65°	83	89
75°	20	21
85°	3	3
90°	0	



TEST NUMBER: P251100

CATALOG NUMBER: LD8B60D010 ER8B609727 8LBS0WMH

CANDELA DISTRIBUTION (FULL):

	0°
0°	2646.7
2.5°	2642.5
5°	2628.4
7.5°	2604.6
10°	2575.1
12.5°	2538.6
15°	2500.7
17.5°	2455.7
20°	2406.6
22.5°	2349.0
25°	2284.4
27.5°	2208.6
30°	2123.0
32.5°	2026.1
35°	1916.6
37.5°	1795.8
40°	1661.0
42.5°	1498.2
45°	1294.6
47.5°	1055.9
50°	807.3
52.5°	579.9
55°	397.4
57.5°	259.8
60°	174.1
62.5°	119.3
65°	82.8
67.5°	54.8
70°	36.5
72.5°	25.3
75°	19.7
77.5°	14.0
80°	8.4
82.5°	4.2
85°	2.8
87.5°	1.4
90°	0.0

(END OF REPORT)