

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: PORTFOLIO

Report Number: P251133

Luminaire Tested: **LD8B70D010 ER8B70835 8LBNOWH**

Issue Date: 03/03/2020

Test Information

Test Method: LM-79-08
Report Number: P251133
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P13946)
Test Lab: INNOVATION CENTER-P1
Issue Date: 03/03/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LD8B70D010 ER8B70835 8LBN0WH
Description: PORTFOLIO 8 INCH NARROW DISTRIBUTION 50 DEGREE CUTOFF RECESSED
DOWNLIGHT
80 CRI 3500 CCT WITH WHEAT TRIM
Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 7023.0 lumens
Efficiency: N/A
Efficacy: 92.5 lumens/watt
Spacing Criteria (0/90/45): 0.58 / 0.58 / 0.66
Luminous Opening: Circular (Dia: 0.67' x H: 0')
CIE Type: Direct


Input Watts (W): 75.9
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P251133

CATALOG NUMBER: LD8B70D010 ER8B70835 8LBN0WH

Luminous Intensity Polar Plot

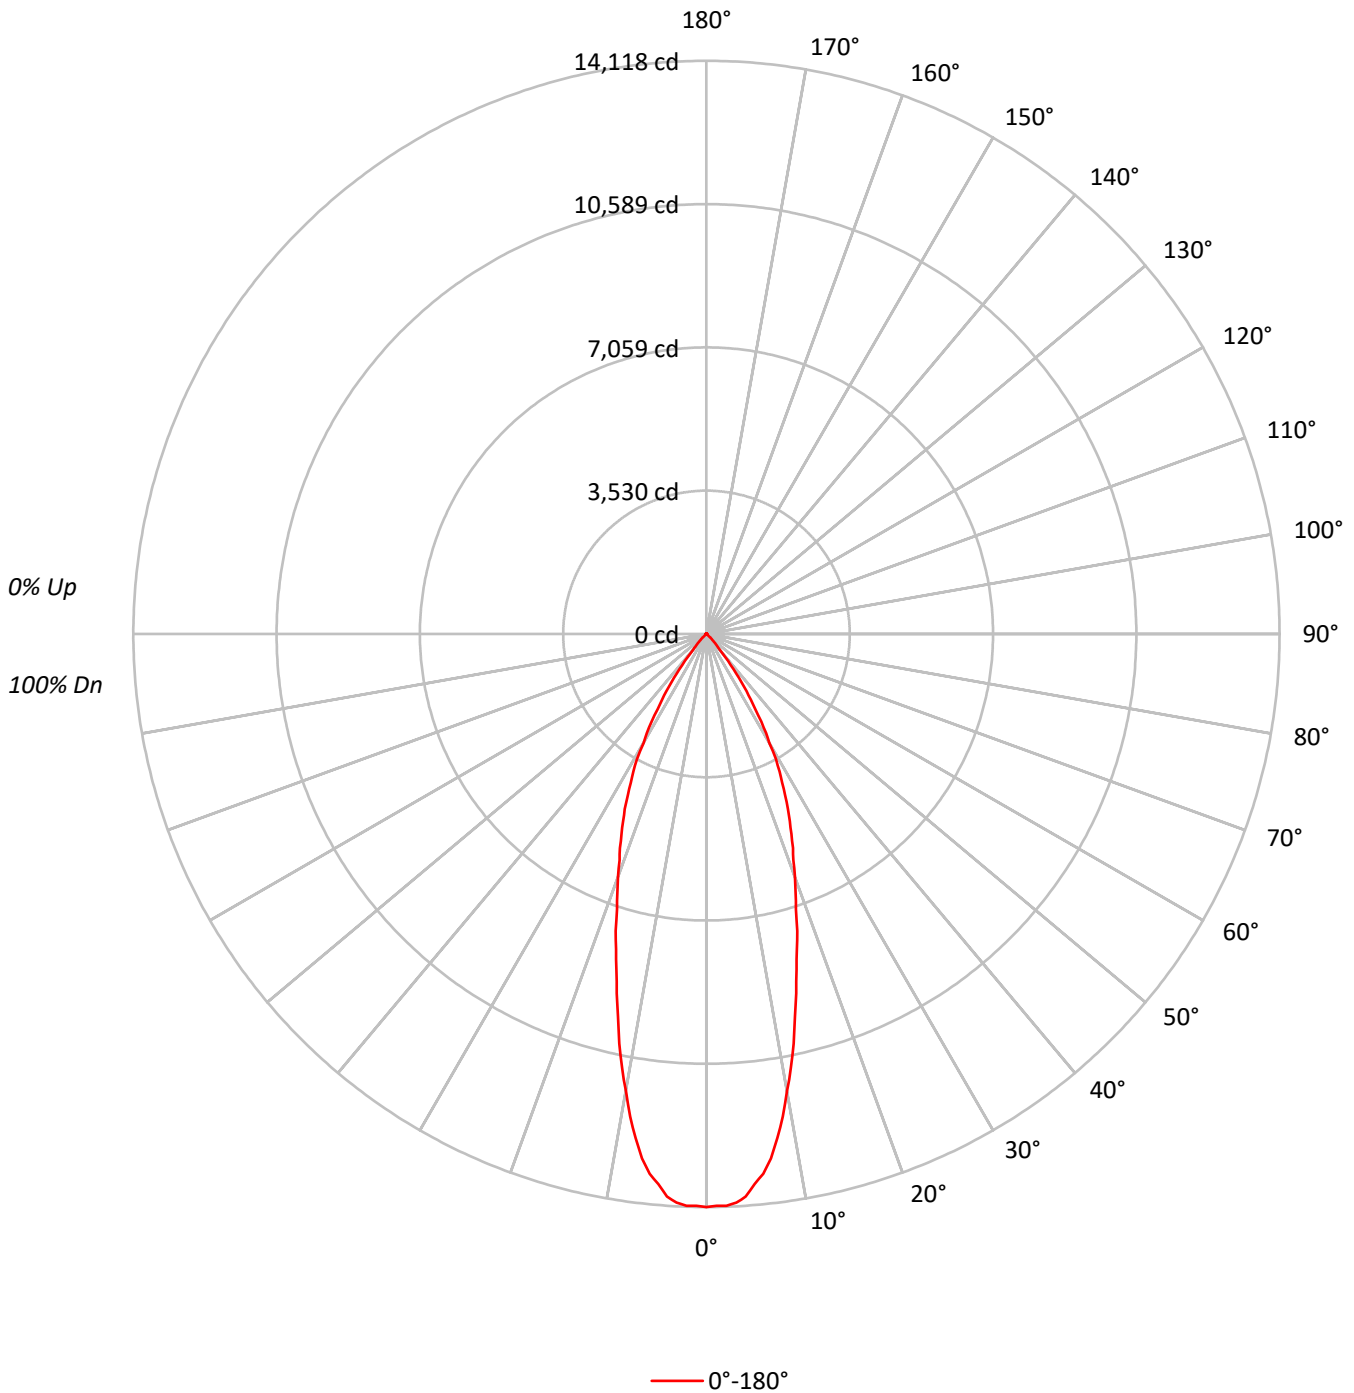



TEST NUMBER: P251133

CATALOG NUMBER: LD8B70D010 ER8B70835 8LBN0WH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	114	112	109	107	112	109	107	106	105	104	102		102	100	99		98	97	96	95
2	109	105	101	98	107	103	100	97	100	97	95		97	95	93		94	93	91	89
3	105	99	94	91	103	97	93	90	95	91	89		92	90	87		90	88	86	85
4	100	93	88	85	98	92	88	84	90	86	83		88	85	82		86	84	81	80
5	96	88	83	79	94	87	83	79	86	82	78		84	81	78		83	80	77	76
6	92	84	79	75	90	83	78	74	82	77	74		80	76	74		79	76	73	72
7	88	80	74	71	87	79	74	70	78	73	70		77	73	70		76	72	69	68
8	84	76	71	67	83	75	70	67	74	70	67		73	69	66		72	69	66	65
9	81	72	67	64	80	72	67	64	71	66	63		70	66	63		69	66	63	62
10	78	69	64	61	77	69	64	61	68	63	60		67	63	60		67	63	60	59

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	435344
5°	421004
10°	358037
15°	273267
20°	208843
25°	161839
30°	110381
35°	64850
40°	19829
45°	7802
50°	120
55°	134
60°	154
65°	358
70°	667
75°	584
80°	444
85°	2618



TEST NUMBER: P251133

CATALOG NUMBER: LD8B70D010 ER8B70835 8LBN0WH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	1233.0	17.6
10°-20°	2389.3	34.0
20°-30°	2151.1	30.6
30°-40°	1064.3	15.2
40°-50°	161.9	2.3
50°-60°	6.7	0.1
60°-70°	8.6	0.1
70°-80°	3.2	0.0
80°-90°	5.0	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	5773.4	82.2
0°-40°	6837.6	97.4
0°-60°	7006.2	99.8
0°-90°	7023.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	7023.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	14118	
5°	13601	###
15°	8560	2389
25°	4757	2151
35°	1723	1064
45°	179	162
55°	2	7
65°	5	9
75°	5	3
85°	7	5
90°	0	



TEST NUMBER: P251133

CATALOG NUMBER: LD8B70D010 ER8B70835 8LBN0WH

CANDELA DISTRIBUTION (FULL):

	0°
0°	14117.9
1°	14088.6
2°	14095.8
3°	14024.8
4°	13894.9
5°	13600.9
6°	13375.4
7°	13017.6
8°	12537.3
9°	12037.3
10°	11434.5
11°	10895.4
12°	10317.1
13°	9677.4
14°	9126.0
15°	8559.9
16°	8077.1
17°	7650.8
18°	7126.3
19°	6741.5
20°	6364.2
21°	5972.1
22°	5685.4
23°	5352.1
24°	5045.7
25°	4756.6
26°	4415.9
27°	4109.7
28°	3835.2
29°	3533.7
30°	3100.0
31°	2855.0
32°	2546.2
33°	2208.0
34°	1950.7
35°	1722.7
37.5°	1090.5
40°	492.6
42.5°	335.7
45°	178.9
47.5°	100.4
50°	2.5
52.5°	9.8
55°	2.5
57.5°	14.7



TEST NUMBER: P251133

CATALOG NUMBER: LD8B70D010 ER8B70835 8LBN0WH

CANDELA DISTRIBUTION (continued):

	0°
60°	2.5
62.5°	12.3
65°	4.9
67.5°	12.3
70°	7.4
72.5°	2.5
75°	4.9
77.5°	0.0
80°	2.5
82.5°	9.8
85°	7.4
87.5°	0.0
90°	0.0

(END OF REPORT)