

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: PORTFOLIO

Report Number: P251063

Luminaire Tested: **LD8B70D010 ER8B70840 8LBM0WMH**

Issue Date: 03/03/2020

Test Information

Test Method: LM-79-08
Report Number: P251063
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P201704)
Test Lab: INNOVATION CENTER-P1
Issue Date: 03/03/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LD8B70D010 ER8B70840 8LBM0WMH
Description: PORTFOLIO 8 INCH MEDIUM DISTRIBUTION 55 DEG CUTOFF RECESSED
DOWNLIGHT
80 CRI 4000 CCT WITH WARM HAZE TRIM
Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 7153.0 lumens
Efficiency: N/A
Efficacy: 94.2 lumens/watt
Spacing Criteria (0/90/45): 0.83 / 0.83 / 0.83
Luminous Opening: Circular (Dia: 0.67' x H: 0')
CIE Type: Direct


Input Watts (W): 75.9
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P251063

CATALOG NUMBER: LD8B70D010 ER8B70840 8LBM0WMH

Luminous Intensity Polar Plot

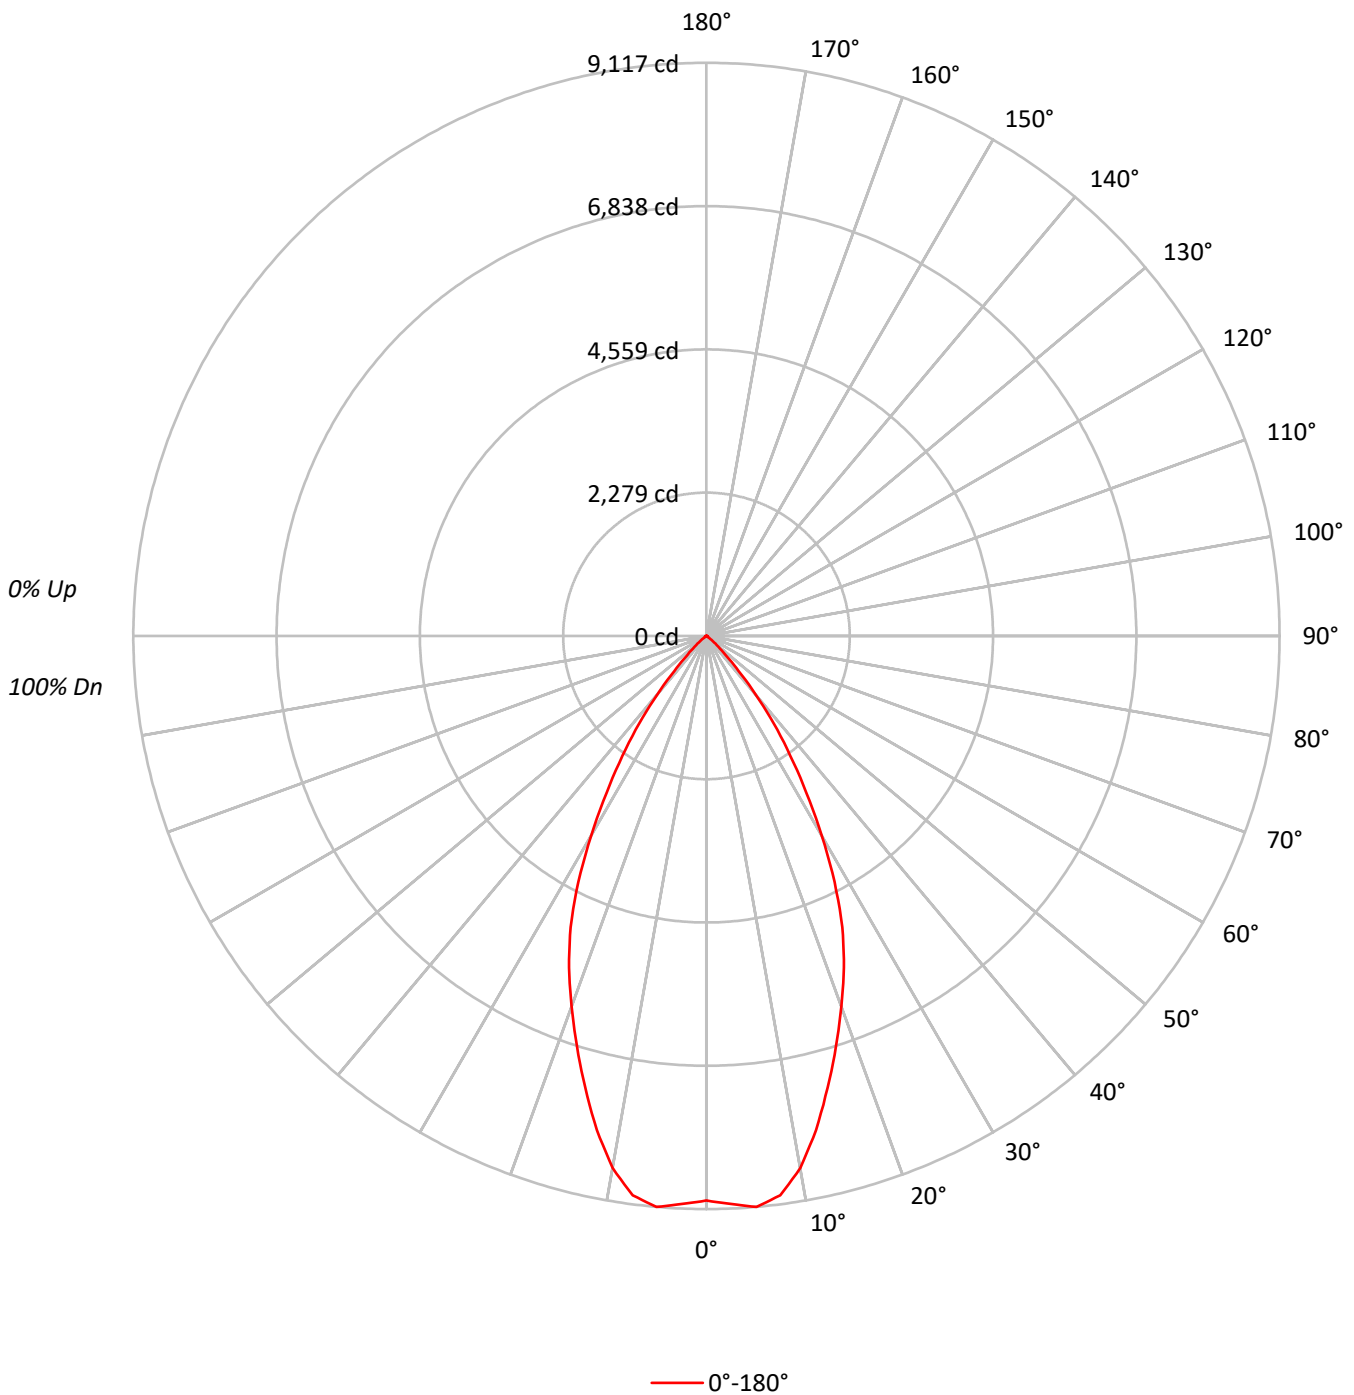



TEST NUMBER: P251063

CATALOG NUMBER: LD8B70D010 ER8B70840 8LBM0WMH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20	
RC	80					70					50					30					10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100				100
1	114	111	109	106	111	109	107	105	105	103	101	101	100	98	98	97	96	94				94
2	108	104	100	96	106	102	98	95	99	96	93	96	93	91	93	91	89	88				88
3	103	97	92	88	101	95	91	87	93	89	86	90	87	85	88	86	83	82				82
4	98	91	85	81	96	89	84	81	87	83	80	85	82	79	83	80	78	76				76
5	93	85	79	75	92	84	79	75	82	78	74	81	77	73	79	76	73	71				71
6	89	80	74	70	87	79	74	70	78	73	69	76	72	69	75	71	68	67				67
7	84	75	69	65	83	75	69	65	73	68	65	72	68	64	71	67	64	63				63
8	80	71	65	61	79	71	65	61	69	64	61	68	64	61	67	63	60	59				59
9	77	67	61	58	76	67	61	57	66	61	57	65	60	57	64	60	57	56				56
10	73	64	58	54	72	63	58	54	62	58	54	62	57	54	61	57	54	53				53

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	276892
5°	282209
10°	269067
15°	237586
20°	205887
25°	173969
30°	130737
35°	87538
40°	49021
45°	19694
50°	6822
55°	1887
60°	1067
65°	934
70°	0
75°	0
80°	0
85°	0



TEST NUMBER: P251063

CATALOG NUMBER: LD8B70D010 ER8B70840 8LBM0WMH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	853.0	11.9
10°-20°	2075.8	29.0
20°-30°	2303.5	32.2
30°-40°	1459.3	20.4
40°-50°	404.9	5.7
50°-60°	46.4	0.6
60°-70°	9.1	0.1
70°-80°	1.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	5232.3	73.1
0°-40°	6691.6	93.6
0°-60°	7142.9	99.9
0°-90°	7153.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	7153.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	8979	
5°	9117	853
15°	7442	2076
25°	5113	2303
35°	2325	1459
45°	452	405
55°	35	46
65°	13	9
75°	0	1
85°	0	0
90°	0	0
95°	0	0
105°	0	0
115°	0	0
125°	0	0
135°	0	0
145°	0	0
155°	0	0
165°	0	0
175°	0	0
180°	0	0



TEST NUMBER: P251063

CATALOG NUMBER: LD8B70D010 ER8B70840 8LBM0WMH

CANDELA DISTRIBUTION (FULL):

0°	
0°	8979.4
2.5°	9045.9
5°	9117.0
7.5°	8974.9
10°	8593.1
12.5°	8048.7
15°	7442.2
17.5°	6846.6
20°	6274.1
22.5°	5712.3
25°	5113.1
27.5°	4412.4
30°	3671.7
32.5°	2954.3
35°	2325.4
37.5°	1757.2
40°	1217.8
42.5°	757.3
45°	451.6
47.5°	259.7
50°	142.2
52.5°	69.6
55°	35.1
57.5°	26.5
60°	17.3
62.5°	9.1
65°	12.8
67.5°	6.4
70°	0.0
72.5°	1.8
75°	0.0
77.5°	1.8
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0
92.5°	0.0
95°	0.0
97.5°	0.0
100°	0.0
102.5°	0.0
105°	0.0
107.5°	0.0
110°	0.0



TEST NUMBER: P251063

CATALOG NUMBER: LD8B70D010 ER8B70840 8LBM0WMH

CANDELA DISTRIBUTION (continued):

	0°
112.5°	0.0
115°	0.0
117.5°	0.0
120°	0.0
122.5°	0.0
125°	0.0
127.5°	0.0
130°	0.0
132.5°	0.0
135°	0.0
137.5°	0.0
140°	0.0
142.5°	0.0
145°	0.0
147.5°	0.0
150°	0.0
152.5°	0.0
155°	0.0
157.5°	0.0
160°	0.0
162.5°	0.0
165°	0.0
167.5°	0.0
170°	0.0
172.5°	0.0
175°	0.0
177.5°	0.0
180°	0.0

(END OF REPORT)