

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions  
(formerly Eaton)

Brand: PORTFOLIO

Report Number: P251429

Luminaire Tested: **LD8B70D010 ER8B709730 8LBW0MW**

Issue Date: 03/03/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P251429  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-1801-521-48)  
Test Lab: INNOVATION CENTER(G1)  
Issue Date: 03/03/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: PORTFOLIO  
Catalog Number: LD8B70D010 ER8B709730 8LBW0MW  
Description: PORTFOLIO 8 INCH WIDE DISTRIBUTION 60 DEGREE CUTOFF RECESSED  
DOWNLIGHT  
90 CRI 3000 CCT WITH MATTE WHITE TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 6340.0 lumens  
Efficiency: N/A  
Efficacy: 83.5 lumens/watt  
Spacing Criteria (0/90/45): 1.11 / 1.11 / 1.05  
Luminous Opening: Circular (Dia: 0.67' x H: 0')  
CIE Type: Direct


Input Watts (W): 75.9  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P251429

CATALOG NUMBER: LD8B70D010 ER8B709730 8LBW0MW

### Luminous Intensity Polar Plot

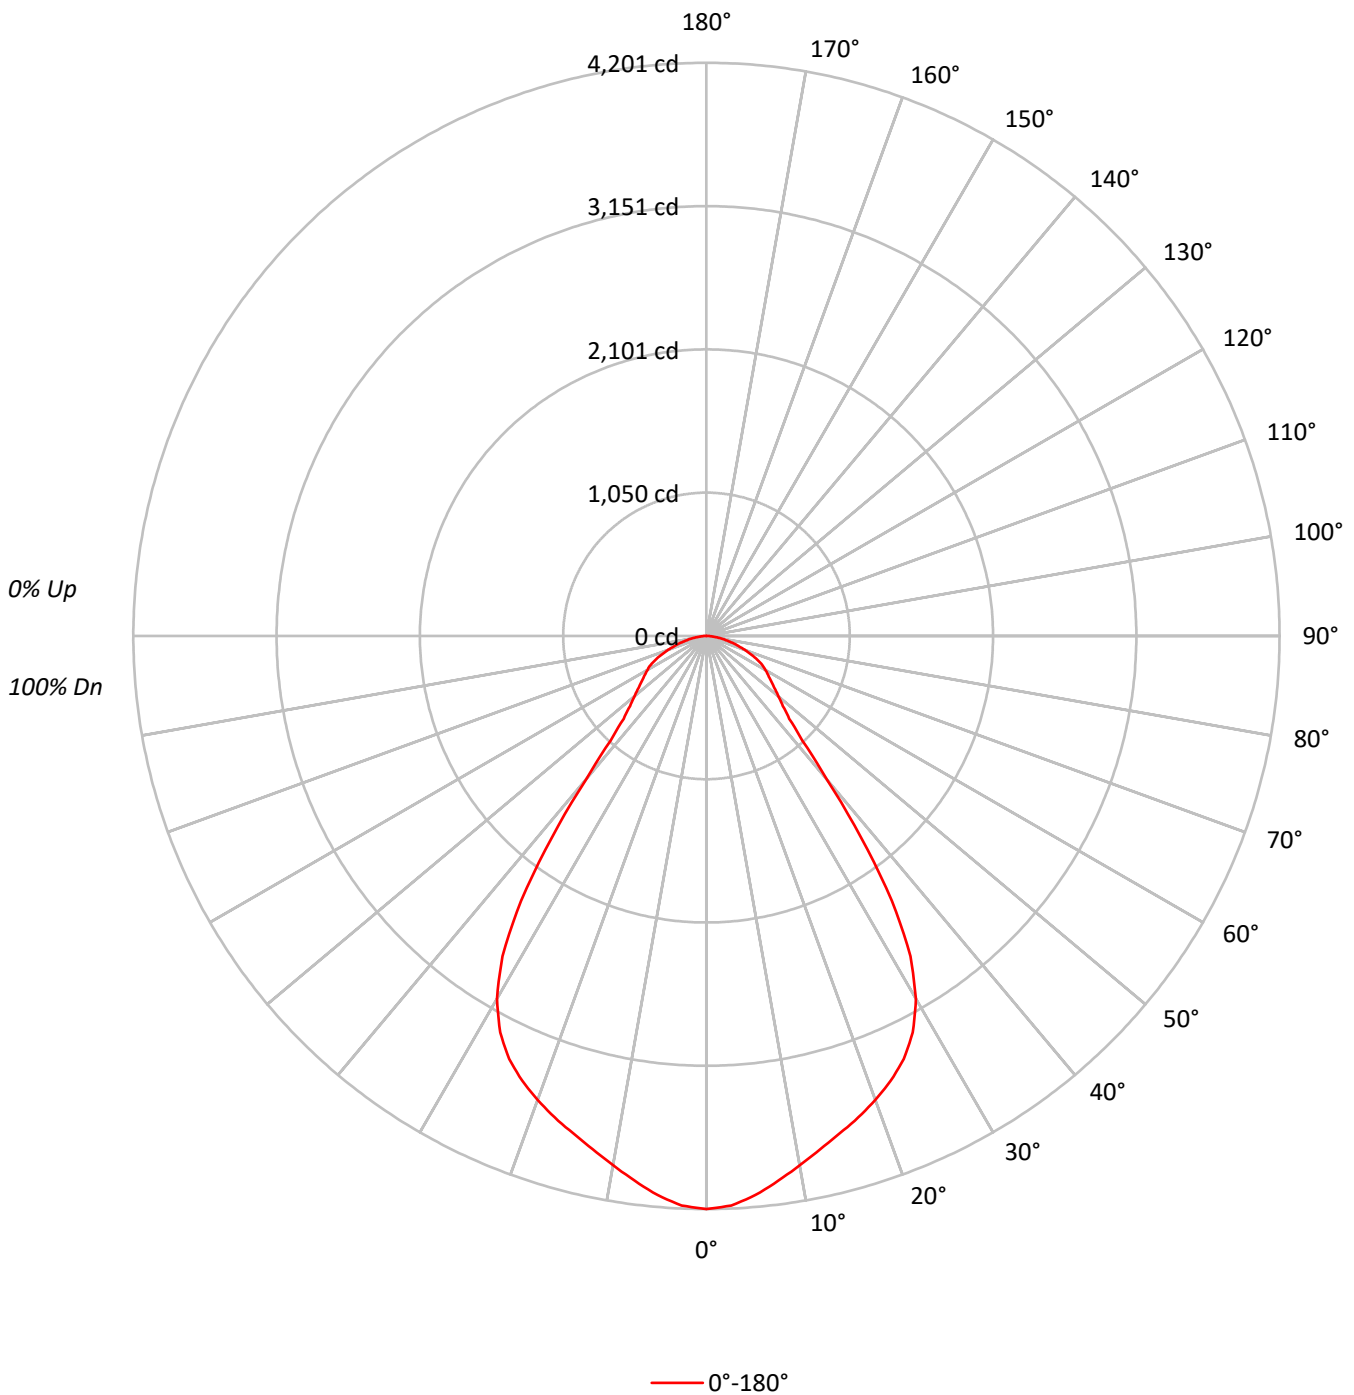



TEST NUMBER: P251429

CATALOG NUMBER: LD8B70D010 ER8B709730 8LBW0MW

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	111	107	104	101	109	105	102	99	101	99	96		97	95	93		94	92	91	89
2	103	97	91	87	101	95	90	86	92	87	84		88	85	82		86	83	80	78
3	96	88	81	76	94	86	80	75	83	78	74		81	76	73		78	75	72	70
4	90	80	73	67	88	79	72	67	76	70	66		74	69	65		72	68	64	62
5	84	73	66	60	82	72	65	60	70	64	59		68	63	59		67	62	58	56
6	79	67	60	54	77	66	59	54	65	58	54		63	58	53		62	57	53	51
7	74	62	55	49	72	61	54	49	60	54	49		59	53	49		57	52	48	47
8	69	58	50	45	68	57	50	45	56	50	45		55	49	45		54	48	45	43
9	65	54	47	42	64	53	46	42	52	46	41		51	45	41		50	45	41	40
10	62	50	43	39	61	50	43	39	49	43	38		48	42	38		47	42	38	37

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	129534
5°	127351
10°	123347
15°	120494
20°	118778
25°	116448
30°	109334
35°	89247
40°	55285
45°	37443
50°	32991
55°	31133
60°	30879
65°	29930
70°	26831
75°	23245
80°	19640
85°	15638



TEST NUMBER: P251429

CATALOG NUMBER: LD8B70D010 ER8B709730 8LBW0MW

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	387.0	6.1
10°-20°	1066.0	16.8
20°-30°	1563.3	24.7
30°-40°	1429.0	22.5
40°-50°	707.5	11.2
50°-60°	523.2	8.3
60°-70°	402.1	6.3
70°-80°	209.6	3.3
80°-90°	52.2	0.8
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	3016.4	47.6
0°-40°	4445.4	70.1
0°-60°	5676.0	89.5
0°-90°	6340.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	6340.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	4201	
5°	4114	387
15°	3774	1066
25°	3422	1563
35°	2371	1429
45°	859	707
55°	579	523
65°	410	402
75°	195	210
85°	44	52
90°	0	



TEST NUMBER: P251429

CATALOG NUMBER: LD8B70D010 ER8B709730 8LBW0MW

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	4200.7
2.5°	4178.6
5°	4114.2
7.5°	4027.8
10°	3939.3
12.5°	3852.8
15°	3774.4
17.5°	3700.0
20°	3619.6
22.5°	3529.1
25°	3422.5
27.5°	3275.7
30°	3070.6
32.5°	2783.0
35°	2370.8
37.5°	1860.0
40°	1373.4
42.5°	1039.6
45°	858.6
47.5°	760.1
50°	687.7
52.5°	629.4
55°	579.1
57.5°	536.9
60°	500.7
62.5°	462.5
65°	410.2
67.5°	353.9
70°	297.6
72.5°	245.3
75°	195.1
77.5°	150.8
80°	110.6
82.5°	76.4
85°	44.2
87.5°	16.1
90°	0.0

(END OF REPORT)