

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions  
(formerly Eaton)

Brand: PORTFOLIO

Report Number: P247718

Luminaire Tested: **LD8B80D010 ER8B80827 8LBS0MW**

Issue Date: 03/03/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P247718  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-1801-521-88)  
Test Lab: INNOVATION CENTER(G1)  
Issue Date: 03/03/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: PORTFOLIO  
Catalog Number: LD8B80D010 ER8B80827 8LBS0MW  
Description: PORTFOLIO 8 INCH WIDE SHALLOW DISTRIBUTION 75 DEGREE CUTOFF RECESSED  
DOWNLIGHT  
80 CRI 2700 CCT WITH MATTE WHITE TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 8692.0 lumens  
Efficiency: N/A  
Efficacy: 116.8 lumens/watt  
Spacing Criteria (0/90/45): 1.18 / 1.18 / 1.24  
Luminous Opening: Circular (Dia: 0.67' x H: 0')  
CIE Type: Direct


Input Watts (W): 74.4  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P247718

CATALOG NUMBER: LD8B80D010 ER8B80827 8LBS0MW

### Luminous Intensity Polar Plot

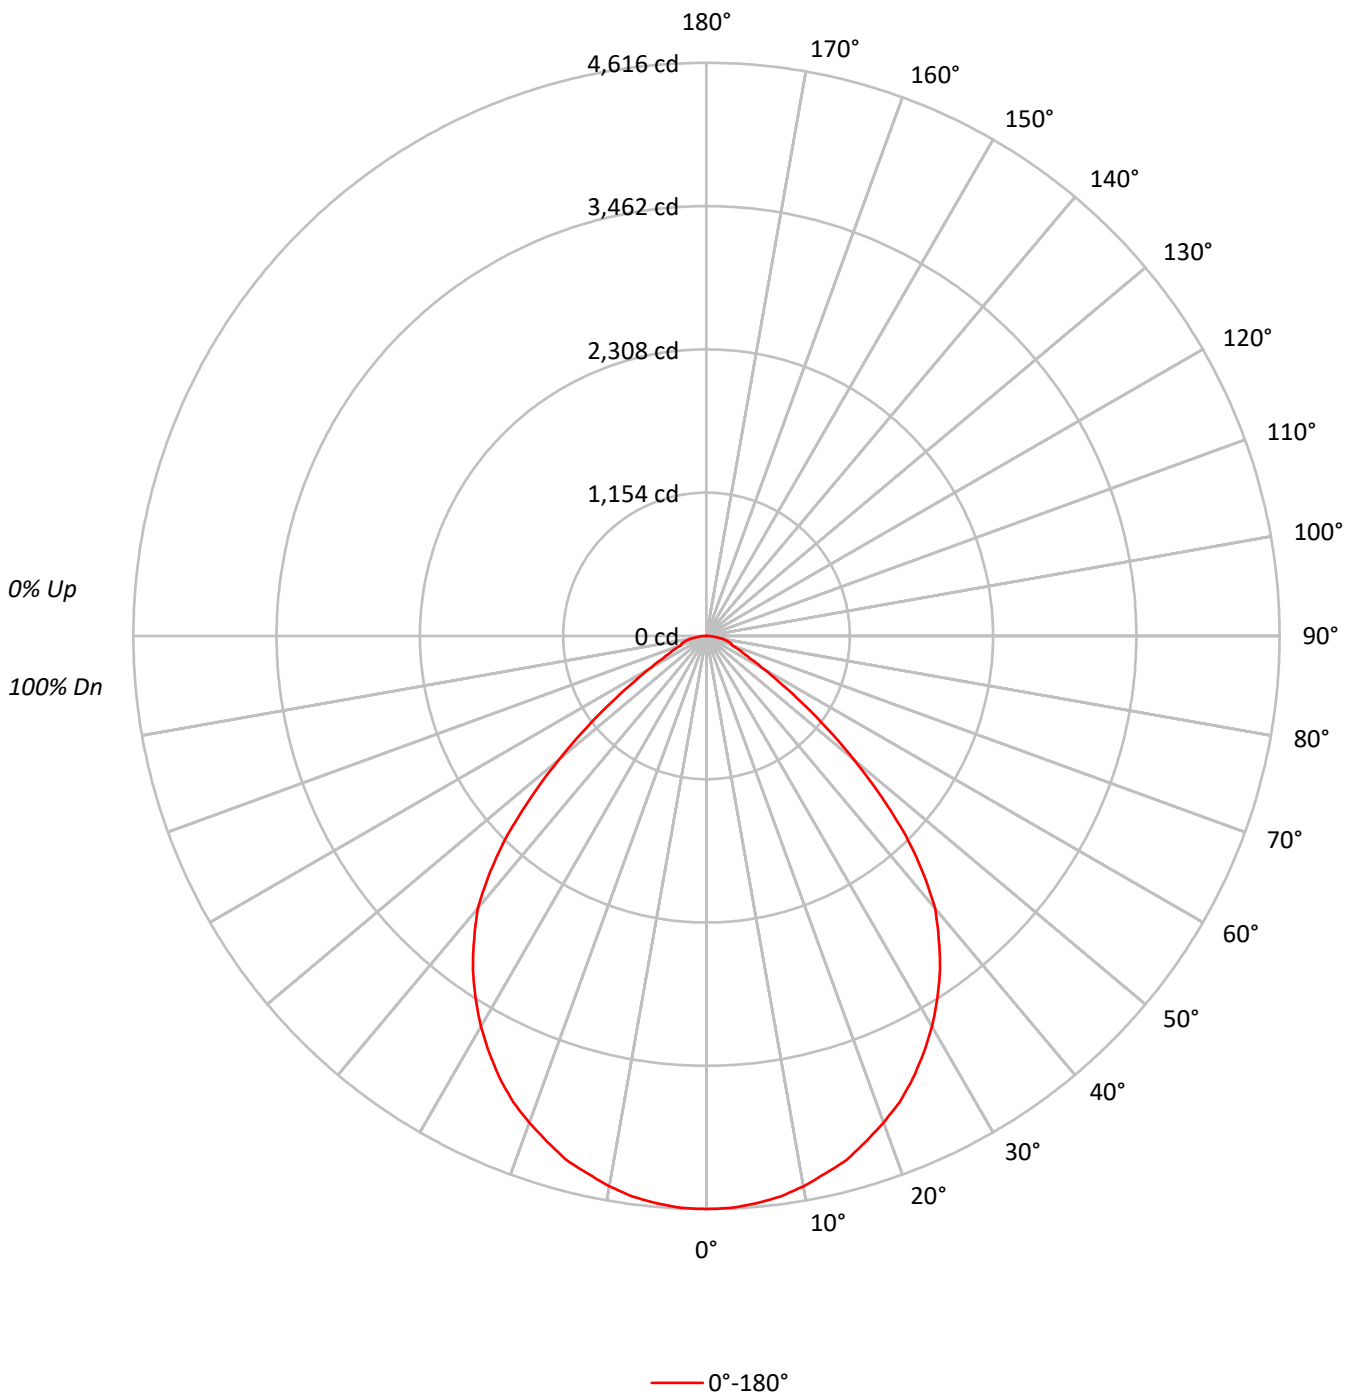



TEST NUMBER: P247718

CATALOG NUMBER: LD8B80D010 ER8B80827 8LBS0MW

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	111	108	104	101	109	105	102	100	101	99	96		97	95	94		94	92	91	89
2	103	97	91	87	101	95	90	86	92	87	84		88	85	82		86	83	80	78
3	96	87	81	75	94	86	80	75	83	78	73		80	76	72		78	74	71	69
4	89	79	72	66	87	78	71	66	75	69	65		73	68	64		71	67	63	61
5	83	72	64	59	81	71	64	58	69	62	58		67	61	57		65	60	57	55
6	77	66	58	52	75	65	57	52	63	56	52		61	56	51		60	55	51	49
7	72	60	52	47	70	59	52	47	58	51	47		57	51	46		55	50	46	44
8	67	55	48	43	66	55	47	42	53	47	42		52	46	42		51	46	42	40
9	63	51	44	39	62	51	44	39	50	43	39		49	43	38		48	42	38	37
10	60	47	40	36	58	47	40	35	46	40	35		45	39	35		44	39	35	33

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	142325
5°	141971
10°	140910
15°	139441
20°	136869
25°	133834
30°	129338
35°	123462
40°	115291
45°	98757
50°	74257
55°	50331
60°	32748
65°	24027
70°	19619
75°	22244
80°	23316
85°	18929



TEST NUMBER: P247718

CATALOG NUMBER: LD8B80D010 ER8B80827 8LBS0MW

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	435.2	5.0
10°-20°	1228.7	14.1
20°-30°	1807.7	20.8
30°-40°	2041.8	23.5
40°-50°	1719.5	19.8
50°-60°	867.5	10.0
60°-70°	339.9	3.9
70°-80°	191.9	2.2
80°-90°	59.7	0.7
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	3471.6	39.9
0°-40°	5513.4	63.4
0°-60°	8100.5	93.2
0°-90°	8692.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	8692.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	4616	
5°	4586	435
15°	4368	1229
25°	3934	1808
35°	3280	2042
45°	2265	1720
55°	936	868
65°	329	340
75°	187	192
85°	54	60
90°	0	



TEST NUMBER: P247718

CATALOG NUMBER: LD8B80D010 ER8B80827 8LBS0MW

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	4615.5
2.5°	4610.9
5°	4586.5
7.5°	4554.6
10°	4500.2
12.5°	4432.6
15°	4367.9
17.5°	4269.4
20°	4170.9
22.5°	4063.9
25°	3933.5
27.5°	3786.2
30°	3632.4
32.5°	3459.8
35°	3279.7
37.5°	3073.3
40°	2864.1
42.5°	2578.9
45°	2264.6
47.5°	1904.4
50°	1547.9
52.5°	1226.1
55°	936.2
57.5°	705.5
60°	531.0
62.5°	405.3
65°	329.3
67.5°	268.3
70°	217.6
72.5°	210.1
75°	186.7
77.5°	155.7
80°	131.3
82.5°	83.5
85°	53.5
87.5°	16.9
90°	0.0

(END OF REPORT)