

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: PORTFOLIO

Report Number: P249938

Luminaire Tested: **LD8B80D010 ER8B809727 8LBM0H**

Issue Date: 03/03/2020

Test Information

Test Method: LM-79-08
Report Number: P249938
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P13954)
Test Lab: INNOVATION CENTER-P1
Issue Date: 03/03/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LD8B80D010 ER8B809727 8LBM0H
Description: PORTFOLIO 8 INCH MEDIUM DISTRIBUTION 55 DEG CUTOFF RECESSED
DOWNLIGHT
97 CRI 2700 CCT WITH SEMI-SPECULAR CLEAR TRIM
Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 5666.0 lumens
Efficiency: N/A
Efficacy: 76.2 lumens/watt
Spacing Criteria (0/90/45): 0.92 / 0.92 / 0.93
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 74.4
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P249938

CATALOG NUMBER: LD8B80D010 ER8B809727 8LBM0H

Luminous Intensity Polar Plot

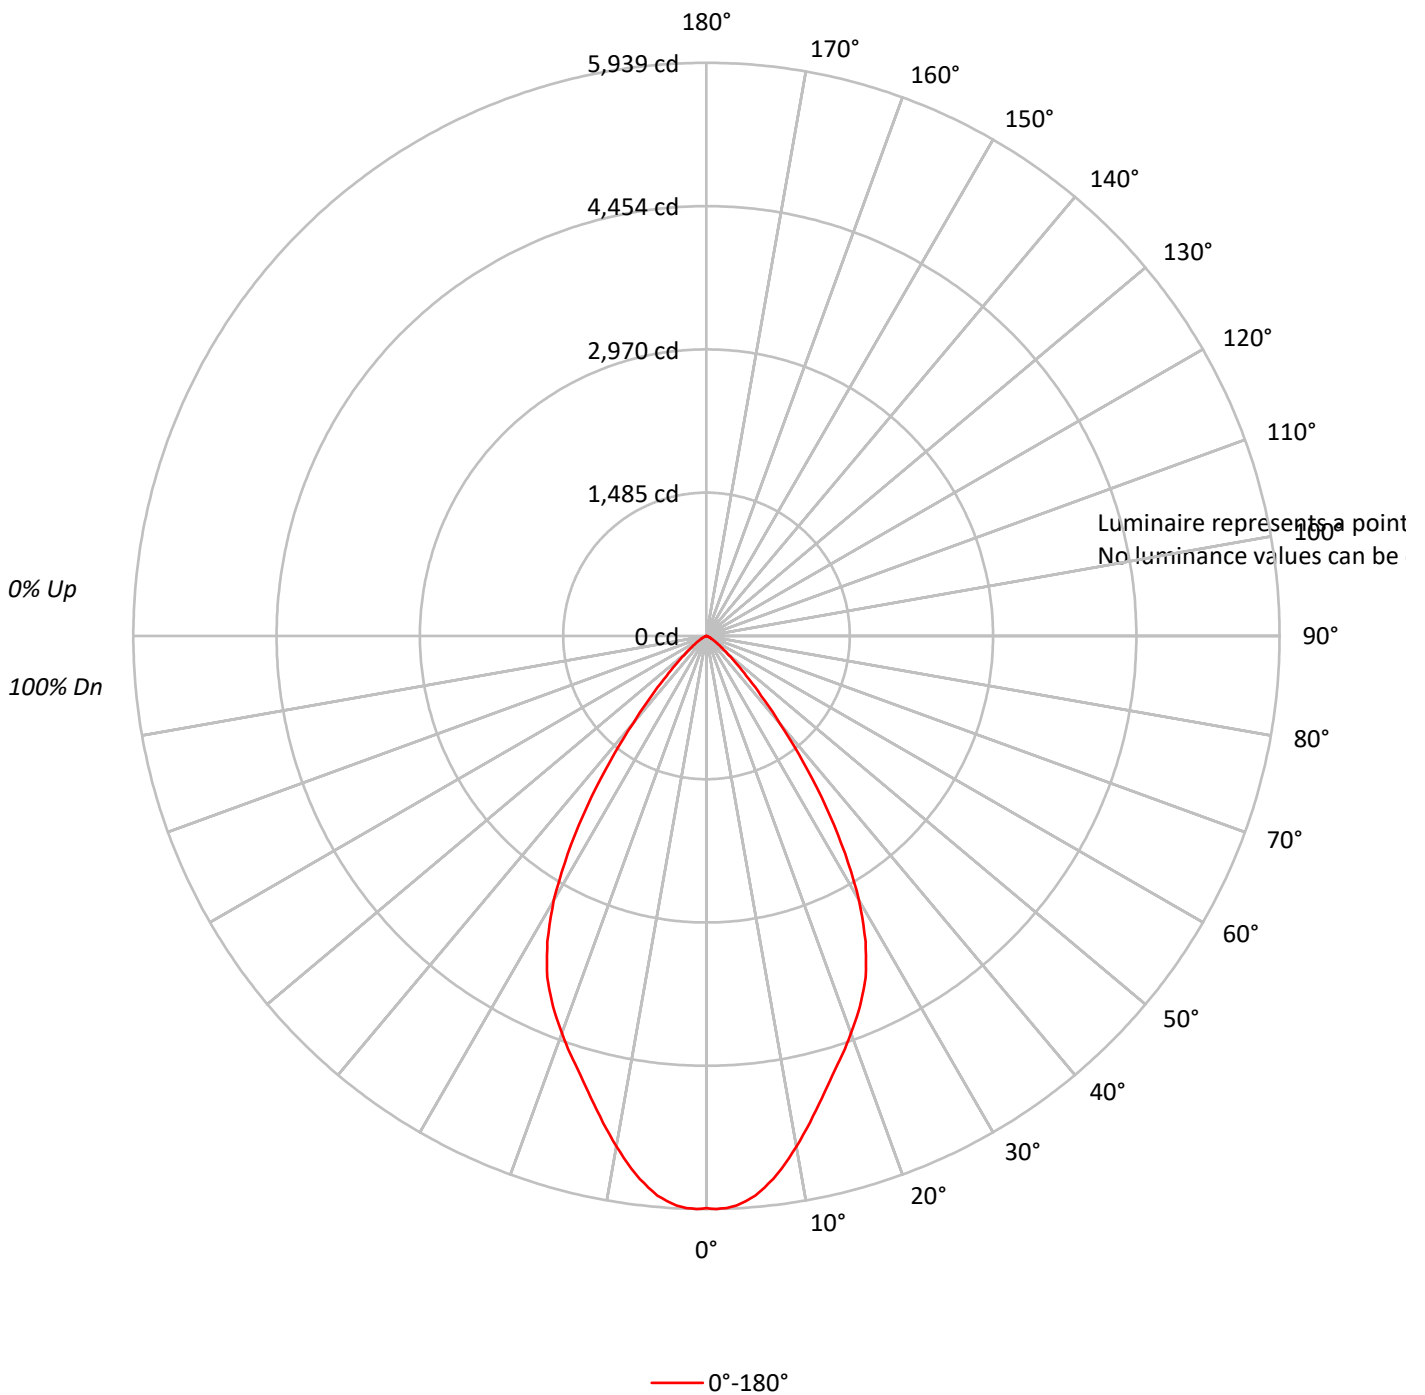



TEST NUMBER: P249938

CATALOG NUMBER: LD8B80D010 ER8B809727 8LBM0H

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	113	110	108	105	111	108	106	104	104	102	101		100	99	98		97	96	95	93
2	107	102	98	94	105	100	97	93	97	94	91		94	92	89		91	89	87	86
3	101	95	90	85	99	93	89	85	91	87	83		88	85	82		86	83	81	79
4	96	88	82	78	94	87	82	77	85	80	76		83	79	76		81	77	75	73
5	91	82	76	71	89	81	75	71	79	74	70		78	73	70		76	72	69	68
6	86	77	70	66	84	76	70	66	74	69	65		73	68	65		71	67	64	63
7	81	72	65	61	80	71	65	61	70	64	60		68	64	60		67	63	60	58
8	77	67	61	57	76	67	61	56	65	60	56		64	60	56		63	59	56	54
9	73	63	57	53	72	63	57	53	62	56	53		61	56	52		60	55	52	51
10	70	60	53	49	69	59	53	49	58	53	49		57	53	49		57	52	49	48

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P249938

CATALOG NUMBER: LD8B80D010 ER8B809727 8LBM0H

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	540.7	9.5
10°-20°	1360.3	24.0
20°-30°	1766.0	31.2
30°-40°	1332.9	23.5
40°-50°	487.7	8.6
50°-60°	136.3	2.4
60°-70°	35.9	0.6
70°-80°	6.0	0.1
80°-90°	0.2	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	3666.9	64.7
0°-40°	4999.8	88.2
0°-60°	5623.9	99.3
0°-90°	5666.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	5666.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	5930	
5°	5821	541
15°	4835	1360
25°	3904	1766
35°	2152	1333
45°	585	488
55°	140	136
65°	34	36
75°	5	6
85°	0	0
90°	0	



TEST NUMBER: P249938

CATALOG NUMBER: LD8B80D010 ER8B809727 8LBM0H

CANDELA DISTRIBUTION (FULL):

	0°
0°	5930.5
1°	5939.3
2°	5932.3
3°	5909.3
4°	5870.4
5°	5820.9
6°	5748.5
7°	5669.0
8°	5577.1
9°	5476.3
10°	5370.3
11°	5264.3
12°	5154.7
13°	5043.4
14°	4937.4
15°	4834.9
16°	4737.7
17°	4644.0
18°	4559.2
19°	4470.8
20°	4380.7
22.5°	4156.3
25°	3903.6
27.5°	3569.6
30°	3163.2
32.5°	2673.7
35°	2152.4
37.5°	1643.4
40°	1185.7
42.5°	839.4
45°	584.9
47.5°	411.7
50°	277.4
52.5°	203.2
55°	139.6
57.5°	100.7
60°	67.2
62.5°	49.5
65°	33.6
67.5°	23.0
70°	12.4
72.5°	8.8
75°	5.3
77.5°	1.8
80°	1.8



TEST NUMBER: P249938

CATALOG NUMBER: LD8B80D010 ER8B809727 8LBM0H

CANDELA DISTRIBUTION (continued):

	0°
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)