

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions  
(formerly Eaton)

Brand: PORTFOLIO

Report Number: P250604

Luminaire Tested: **LD8B90D010 ER8B90950 8LBM0B**

Issue Date: 03/03/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P250604  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P13928)  
Test Lab: INNOVATION CENTER-P1  
Issue Date: 03/03/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: PORTFOLIO  
Catalog Number: LD8B90D010 ER8B90950 8LBM0B  
Description: PORTFOLIO 8 INCH MEDIUM DISTRIBUTION 55 DEG CUTOFF RECESSED  
DOWNLIGHT  
90 CRI 5000 CCT WITH SPECULAR BLACK TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 5542.0 lumens  
Efficiency: N/A  
Efficacy: 64.4 lumens/watt  
Spacing Criteria (0/90/45): 0.79 / 0.79 / 0.87  
Luminous Opening: Circular (Dia: 0.67' x H: 0')  
CIE Type: Direct


Input Watts (W): 86.1  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P250604

CATALOG NUMBER: LD8B90D010 ER8B90950 8LBM0B

### Luminous Intensity Polar Plot

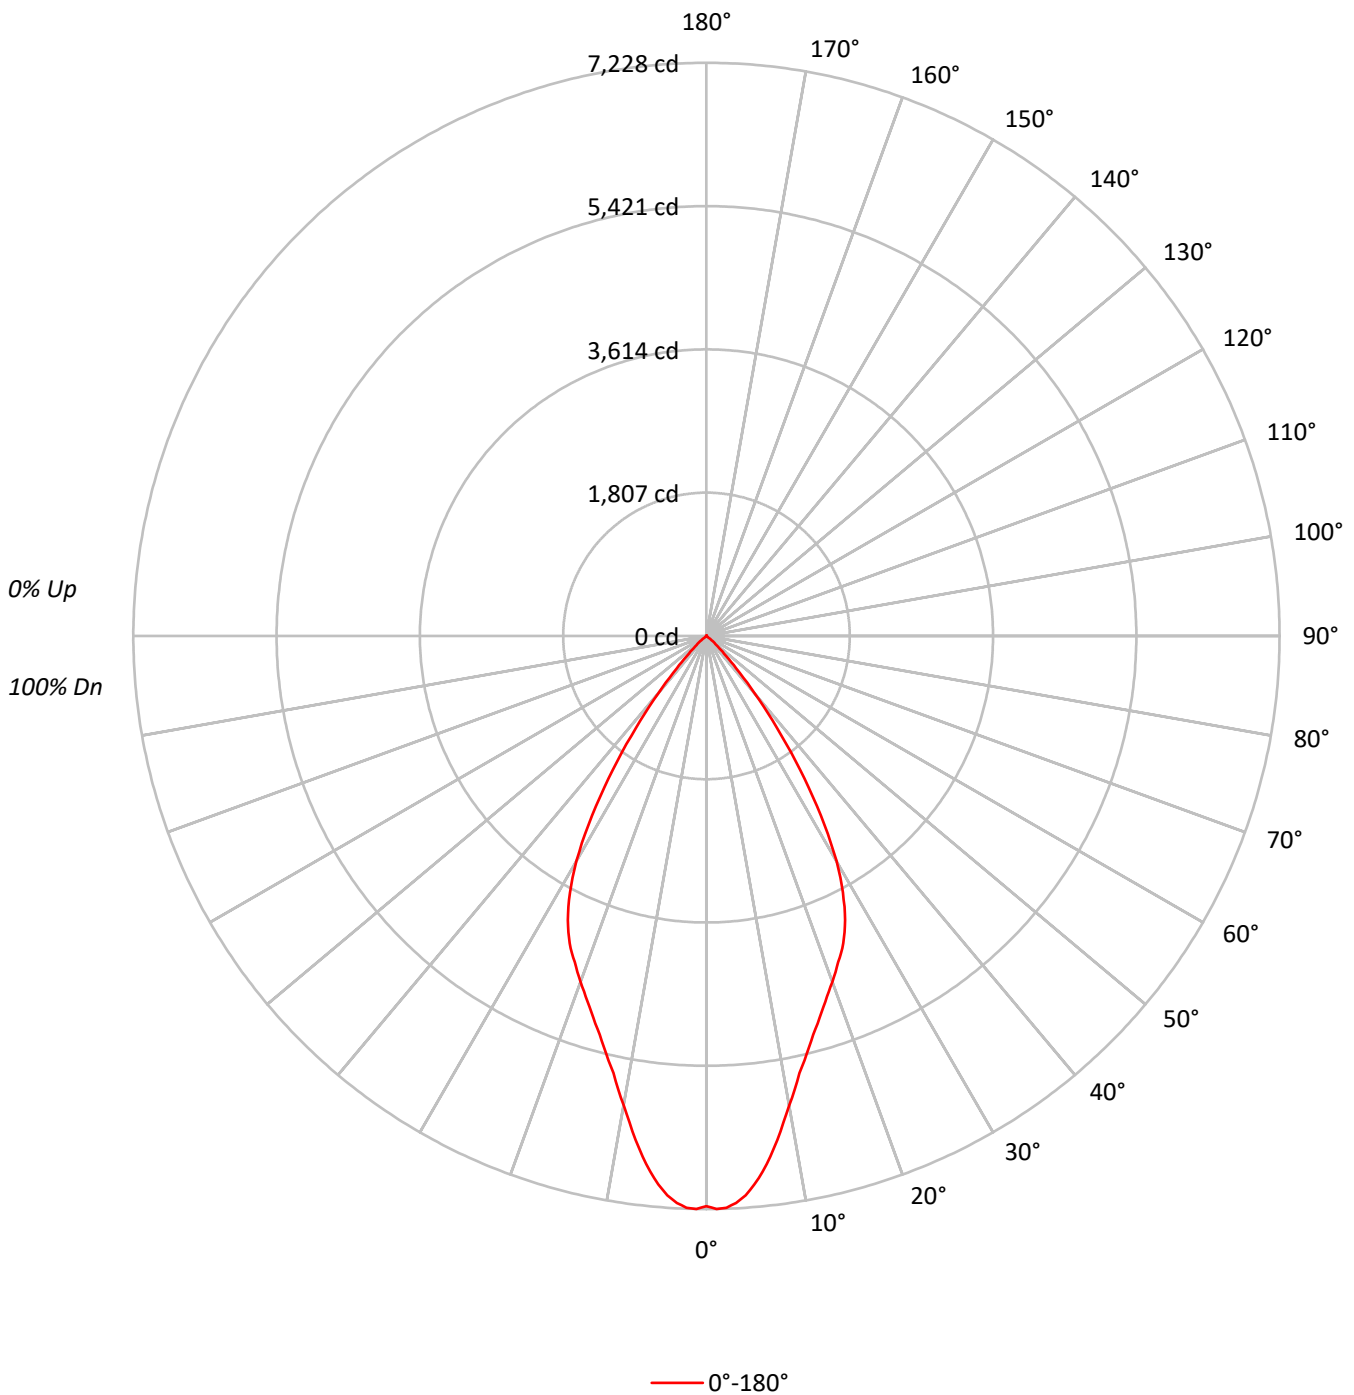



TEST NUMBER: P250604

CATALOG NUMBER: LD8B90D010 ER8B90950 8LBM0B

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	114	111	108	106	111	109	107	105	105	103	101		101	100	98		98	97	96	94
2	108	103	99	96	106	102	98	95	98	95	93		95	93	91		93	91	89	87
3	103	96	92	88	101	95	91	87	92	89	86		90	87	84		88	85	83	81
4	98	90	85	81	96	89	84	80	87	83	79		85	81	78		83	80	77	76
5	93	85	79	75	91	84	78	74	82	77	74		80	76	73		79	75	72	71
6	88	79	74	69	87	79	73	69	77	72	69		76	71	68		74	71	68	66
7	84	75	69	65	83	74	68	64	73	68	64		72	67	64		70	66	63	62
8	80	70	64	60	79	70	64	60	69	64	60		68	63	60		67	63	60	58
9	76	66	61	57	75	66	60	57	65	60	56		64	60	56		63	59	56	55
10	72	63	57	53	71	62	57	53	62	57	53		61	56	53		60	56	53	51

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	221741
5°	214961
10°	188263
15°	166210
20°	152306
25°	140237
30°	116722
35°	77528
40°	37734
45°	13667
50°	4111
55°	290
60°	0
65°	197
70°	0
75°	0
80°	479
85°	0



TEST NUMBER: P250604

CATALOG NUMBER: LD8B90D010 ER8B90950 8LBM0B

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	631.6	11.4
10°-20°	1466.8	26.5
20°-30°	1860.9	33.6
30°-40°	1274.9	23.0
40°-50°	290.5	5.2
50°-60°	14.5	0.3
60°-70°	0.7	0.0
70°-80°	1.1	0.0
80°-90°	1.1	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	3959.3	71.4
0°-40°	5234.2	94.4
0°-60°	5539.2	99.9
0°-90°	5542.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	5542.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	7191	
5°	6944	632
15°	5206	1467
25°	4122	1861
35°	2060	1275
45°	313	291
55°	5	14
65°	3	1
75°	0	1
85°	0	1
90°	0	



TEST NUMBER: P250604

CATALOG NUMBER: LD8B90D010 ER8B90950 8LBM0B

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	7190.9
1°	7228.4
2°	7215.0
3°	7161.4
4°	7070.4
5°	6944.5
6°	6791.9
7°	6615.1
8°	6419.6
9°	6210.7
10°	6012.5
11°	5830.4
12°	5634.9
13°	5493.0
14°	5343.0
15°	5206.4
16°	5083.2
17°	4962.6
18°	4850.2
19°	4740.4
20°	4641.3
21°	4539.5
22°	4435.0
23°	4344.0
24°	4242.3
25°	4121.7
26°	3987.8
27°	3832.5
28°	3666.4
29°	3481.6
30°	3278.1
31°	3047.8
32°	2809.4
33°	2560.3
34°	2305.9
35°	2059.5
37.5°	1454.3
40°	937.4
42.5°	551.7
45°	313.4
47.5°	168.7
50°	85.7
52.5°	16.1
55°	5.4
57.5°	2.7



TEST NUMBER: P250604

CATALOG NUMBER: LD8B90D010 ER8B90950 8LBM0B

**CANDELA DISTRIBUTION (continued):**

	0°
60°	0.0
62.5°	0.0
65°	2.7
67.5°	0.0
70°	0.0
72.5°	2.7
75°	0.0
77.5°	0.0
80°	2.7
82.5°	0.0
85°	0.0
87.5°	2.7
90°	0.0

(END OF REPORT)