

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions  
(formerly Eaton)

Brand: PORTFOLIO

Report Number: P250688

Luminaire Tested: **LD8B90D010 ER8B90950 8LBN0MW**

Issue Date: 03/03/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P250688  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P131425)  
Test Lab: INNOVATION CENTER-P1  
Issue Date: 03/03/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: PORTFOLIO  
Catalog Number: LD8B90D010 ER8B90950 8LBN0MW  
Description: PORTFOLIO 8 INCH NARROW DISTRIBUTION 50 DEGREE CUTOFF RECESSED  
DOWNLIGHT  
90 CRI 5000 CCT WITH MATTE WHITE TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 8035.0 lumens  
Efficiency: N/A  
Efficacy: 93.3 lumens/watt  
Spacing Criteria (0/90/45): 0.79 / 0.79 / 0.85  
Luminous Opening: Circular (Dia: 0.67' x H: 0')  
CIE Type: Direct


Input Watts (W): 86.1  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P250688

CATALOG NUMBER: LD8B90D010 ER8B90950 8LBN0MW

### Luminous Intensity Polar Plot

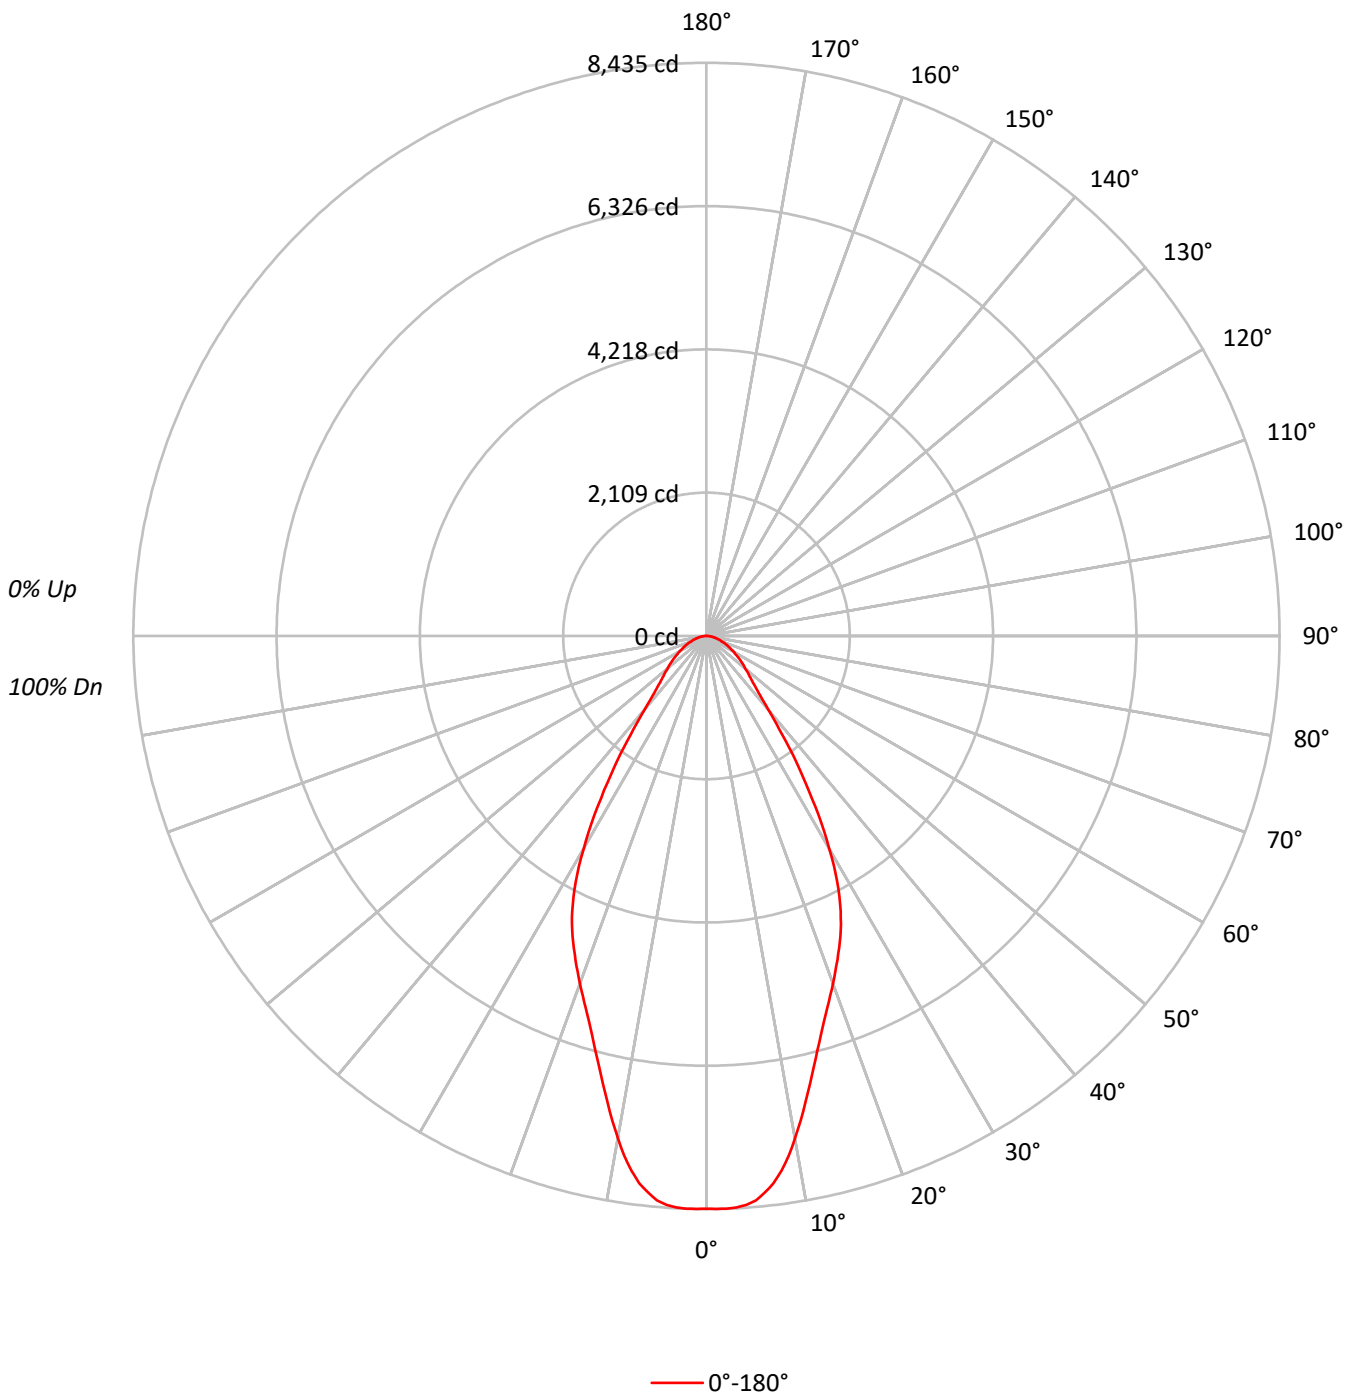



TEST NUMBER: P250688

CATALOG NUMBER: LD8B90D010 ER8B90950 8LBN0MW

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	112	109	106	103	109	106	104	101	102	100	98	98	97	95	95	94	92	90
2	105	99	94	90	103	97	93	89	94	90	87	91	88	85	88	86	83	82
3	99	91	85	80	96	89	84	79	87	82	78	84	80	77	82	78	76	74
4	93	84	77	72	91	83	76	72	80	75	71	78	74	70	76	72	69	67
5	87	78	71	66	85	77	70	65	75	69	65	73	68	64	71	67	64	62
6	82	72	65	60	81	71	65	60	70	64	60	68	63	59	67	62	59	57
7	78	67	60	56	76	67	60	55	65	59	55	64	59	55	63	58	54	53
8	74	63	56	52	72	62	56	51	61	55	51	60	55	51	59	54	51	49
9	70	59	53	48	69	59	52	48	58	52	48	57	51	48	56	51	47	46
10	66	56	49	45	65	55	49	45	54	49	45	54	48	45	53	48	45	43

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	259944
5°	258080
10°	235134
15°	201591
20°	178611
25°	159372
30°	128715
35°	89371
40°	56661
45°	42039
50°	35917
55°	31563
60°	28141
65°	25253
70°	21728
75°	19861
80°	18664
85°	16346



TEST NUMBER: P250688

CATALOG NUMBER: LD8B90D010 ER8B90950 8LBN0MW

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	769.5	9.6
10°-20°	1775.6	22.1
20°-30°	2116.2	26.3
30°-40°	1493.8	18.6
40°-50°	771.4	9.6
50°-60°	529.4	6.6
60°-70°	344.1	4.3
70°-80°	180.2	2.2
80°-90°	54.8	0.7
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	4661.3	58.0
0°-40°	6155.1	76.6
0°-60°	7455.9	92.8
0°-90°	8035.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	8035.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	8430	
5°	8338	770
15°	6315	1776
25°	4684	2116
35°	2374	1494
45°	964	771
55°	587	529
65°	346	344
75°	167	180
85°	46	55
90°	0	



TEST NUMBER: P250688

CATALOG NUMBER: LD8B90D010 ER8B90950 8LBN0MW

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	8429.8
1°	8434.9
2°	8434.9
3°	8422.1
4°	8393.9
5°	8337.5
6°	8237.5
7°	8114.4
8°	7945.2
9°	7740.2
10°	7509.4
11°	7265.8
12°	7011.9
13°	6768.5
14°	6532.6
15°	6314.7
16°	6112.1
17°	5925.0
18°	5755.7
19°	5596.8
20°	5442.9
21°	5291.7
22°	5143.0
23°	4994.3
24°	4843.1
25°	4684.1
26°	4504.5
27°	4309.7
28°	4097.0
29°	3871.4
30°	3614.9
31°	3366.3
32°	3112.4
33°	2850.9
34°	2609.9
35°	2374.1
37.5°	1828.0
40°	1407.6
42.5°	1133.2
45°	964.0
47.5°	843.5
50°	748.7
52.5°	666.6
55°	587.1
57.5°	515.4



TEST NUMBER: P250688

CATALOG NUMBER: LD8B90D010 ER8B90950 8LBN0MW

**CANDELA DISTRIBUTION (continued):**

	0°
60°	456.3
62.5°	397.4
65°	346.1
67.5°	299.9
70°	241.0
72.5°	207.7
75°	166.7
77.5°	135.8
80°	105.1
82.5°	76.9
85°	46.2
87.5°	25.6
90°	0.0

(END OF REPORT)