

Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: PrentaLux

Report Number: P866686

Luminaire Tested: PRLX-2001-L-927-15L-L-X-X-GREY-X

Issue Date: 8/20/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P866686  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2304-993-78)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 8/20/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: Prenalux  
Catalog Number: PRLX-2001-L-927-15L-L-X-X-GREY-X  
Description: PRENTALUX 3D PRINTED PENDANT LED LUMINAIRE, LARGE LIGHT ENGINE, FLAT LENS,  
TAPERED DRUM WITH GRAY INTERIOR SHADE.  
LIGHT LEVEL 1  
Light Source: 2700K CCT, 90 CRI LEDS  
Ballast/Driver: -


**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 1158.9 lumens  
Efficiency: N/A  
Efficacy: 70.7 lumens/watt  
Spacing Criteria (0/90/45): 1.17 / 1.17 / 1.27  
Luminous Opening: Circular (Dia: 1.58' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 16.4  
Input Voltage (V): 120  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: 0.5 HR  
Operation Time: 3 HR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P866686

CATALOG NUMBER: PRLX-2001-L-927-15L-L-X-X-GREY-X

### Luminous Intensity Polar Plot

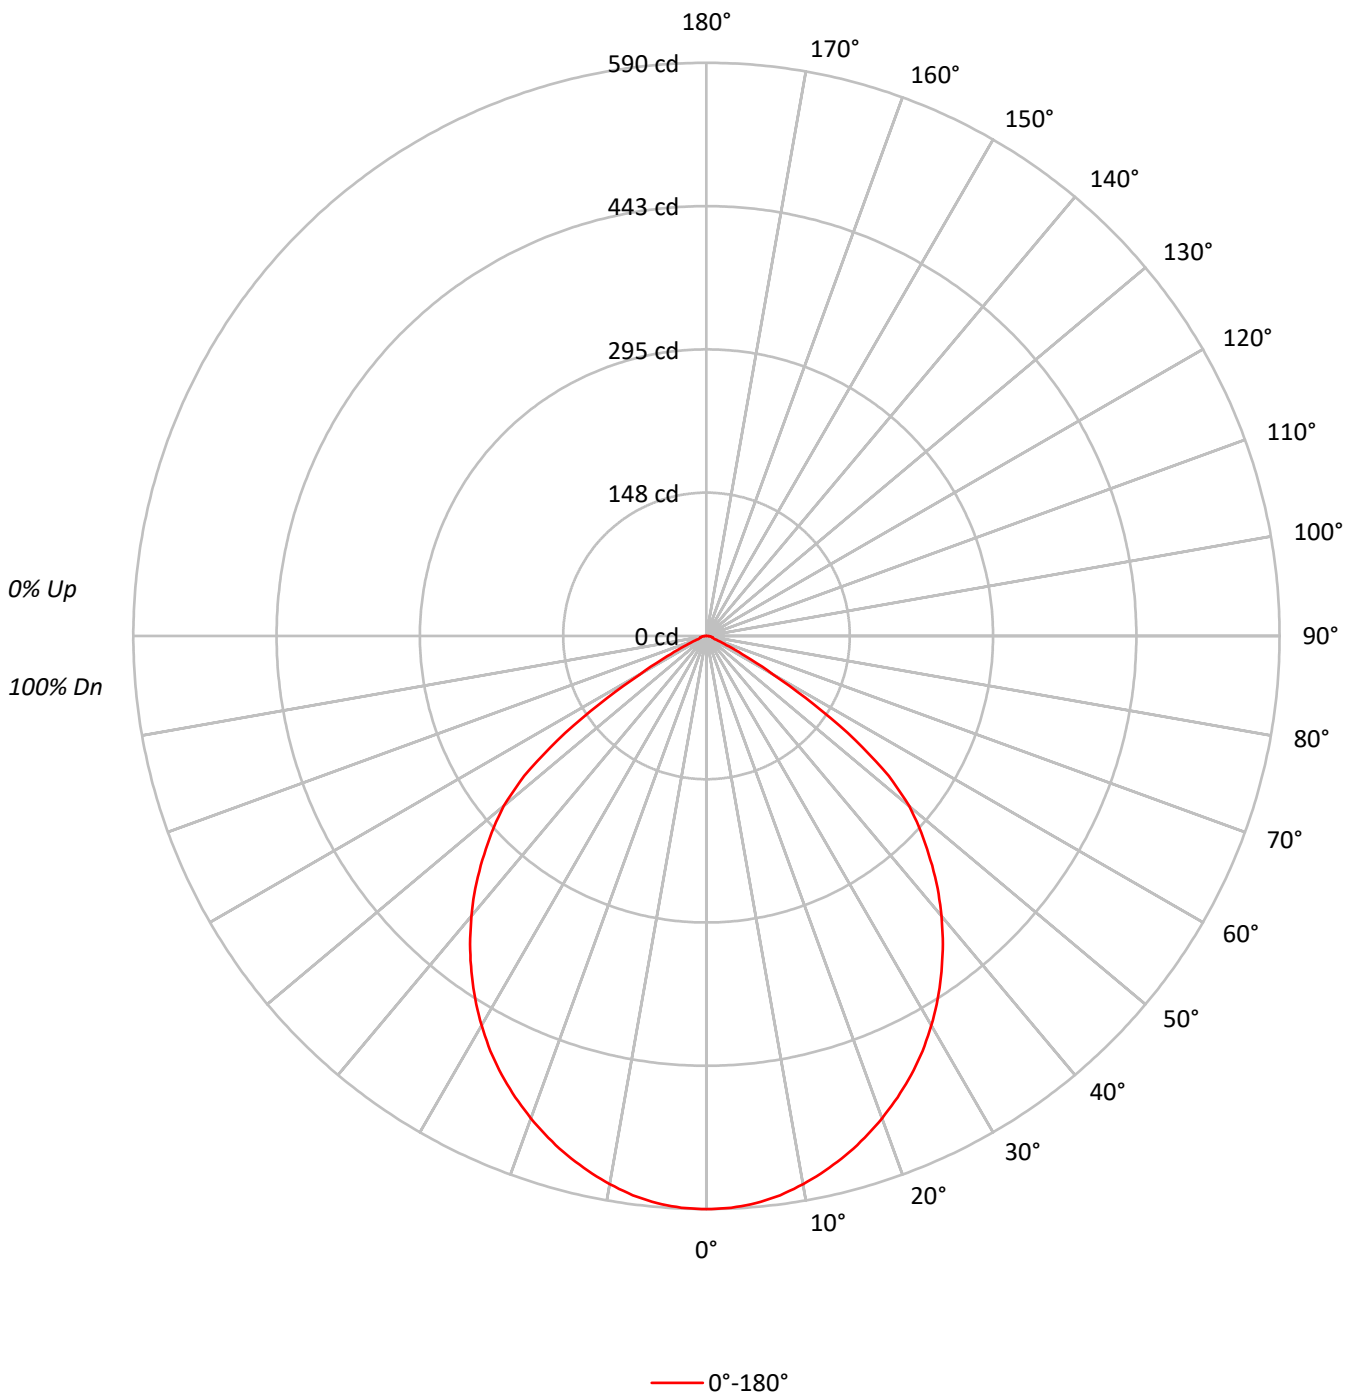



TEST NUMBER: P866686

CATALOG NUMBER: PRLX-2001-L-927-15L-L-X-X-GREY-X

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	112	108	105	102	109	106	103	100	102	99	97		98	96	94		94	93	91	90
2	104	97	92	87	101	95	91	86	92	88	84		89	86	83		86	83	81	79
3	96	88	81	76	94	86	80	75	83	78	74		81	76	73		78	75	71	69
4	89	79	72	66	87	78	71	66	75	70	65		73	68	64		71	67	63	61
5	83	72	64	58	81	71	63	58	69	62	57		67	61	57		65	60	56	54
6	77	65	57	52	75	64	57	52	63	56	51		61	55	51		60	54	50	49
7	72	60	52	46	70	59	51	46	57	51	46		56	50	46		55	49	45	44
8	67	55	47	42	65	54	47	42	53	46	41		52	46	41		51	45	41	39
9	63	50	43	38	61	50	43	38	49	42	38		48	42	37		47	41	37	36
10	59	47	39	35	58	46	39	35	45	39	34		44	38	34		44	38	34	33

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	3225
5°	3216
10°	3181
15°	3133
20°	3075
25°	3008
30°	2923
35°	2816
40°	2685
45°	2521
50°	2317
55°	1789
60°	865
65°	326
70°	128
75°	142
80°	161
85°	182

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 2521 cd/sqm

TEST NUMBER: P866686

CATALOG NUMBER: PRLX-2001-L-927-15L-L-X-X-GREY-X

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	55.5	4.8
10°-20°	156.0	13.5
20°-30°	229.4	19.8
30°-40°	263.5	22.7
40°-50°	251.2	21.7
50°-60°	162.2	14.0
60°-70°	31.1	2.7
70°-80°	7.0	0.6
80°-90°	3.0	0.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	440.9	38.0
0°-40°	704.4	60.8
0°-60°	1117.7	96.4
0°-90°	1158.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1158.9	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	590	
5°	586	56
15°	554	156
25°	499	229
35°	422	263
45°	326	251
55°	188	162
65°	25	31
75°	7	7
85°	3	3
90°	0	

TEST NUMBER: P866686

CATALOG NUMBER: PRLX-2001-L-927-15L-L-X-X-GREY-X

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	590.0
2.5°	589.3
5°	586.1
7.5°	580.8
10°	573.1
12.5°	564.0
15°	553.6
17.5°	541.7
20°	528.5
22.5°	514.0
25°	498.6
27.5°	481.7
30°	463.1
32.5°	443.1
35°	421.9
37.5°	399.8
40°	376.2
42.5°	352.4
45°	326.1
47.5°	300.1
50°	272.4
52.5°	236.4
55°	187.7
57.5°	130.8
60°	79.1
62.5°	45.3
65°	25.2
67.5°	13.2
70°	8.0
72.5°	7.3
75°	6.7
77.5°	6.0
80°	5.1
82.5°	4.1
85°	2.9
87.5°	1.5
90°	0.0



TEST NUMBER: P866686  
 CATALOG NUMBER: PRLX-2001-L-927-15L-L-X-X-GREY-X

**CIE UGR TABLE:**

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	11.98	13.38	12.34	13.69	14.00	11.98	13.38	12.34	13.69	14.00
	3H	11.90	13.13	12.28	13.46	13.83	11.90	13.13	12.28	13.46	13.83
	4H	11.85	13.00	12.26	13.35	13.73	11.85	13.00	12.26	13.35	13.73
	6H	11.81	12.86	12.22	13.23	13.62	11.81	12.86	12.22	13.23	13.62
	8H	11.79	12.78	12.21	13.17	13.58	11.79	12.78	12.21	13.17	13.58
	12H	11.76	12.71	12.19	13.09	13.52	11.76	12.71	12.19	13.09	13.52
4H	2H	11.86	13.00	12.26	13.35	13.73	11.86	13.00	12.26	13.35	13.73
	3H	11.80	12.72	12.21	13.12	13.53	11.80	12.72	12.21	13.12	13.53
	4H	11.75	12.57	12.18	12.99	13.43	11.75	12.57	12.18	12.99	13.43
	6H	11.72	12.43	12.19	12.88	13.34	11.72	12.43	12.19	12.88	13.34
	8H	11.70	12.36	12.17	12.81	13.28	11.70	12.36	12.17	12.81	13.28
	12H	11.68	12.27	12.16	12.75	13.22	11.68	12.27	12.16	12.75	13.22
8H	4H	11.64	12.30	12.11	12.75	13.22	11.64	12.30	12.11	12.75	13.22
	6H	11.61	12.15	12.11	12.65	13.13	11.61	12.15	12.11	12.65	13.13
	8H	11.59	12.08	12.11	12.60	13.09	11.59	12.08	12.11	12.60	13.09
	12H	11.59	12.03	12.10	12.52	13.09	11.59	12.03	12.10	12.52	13.09
12H	4H	11.60	12.19	12.08	12.67	13.14	11.60	12.19	12.08	12.67	13.14
	6H	11.55	12.05	12.07	12.56	13.06	11.55	12.05	12.07	12.56	13.06
	8H	11.56	12.00	12.07	12.50	13.07	11.56	12.00	12.07	12.50	13.07