

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: PrentaLux

Report Number: P866798

Luminaire Tested: PRLX-2001-L-935-117L-L-X-X-GREY-X

Issue Date: 8/20/2024

Test Information

Test Method: LM-79-2019
Report Number: P866798
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2304-993-78)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 8/20/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: Prenalux
Catalog Number: PRLX-2001-L-935-117L-L-X-X-GREY-X
Description: PRENTALUX 3D PRINTED PENDANT LED LUMINAIRE, LARGE LIGHT ENGINE, FLAT LENS,
TAPERED DRUM WITH GRAY INTERIOR SHADE.
LIGHT LEVEL 7
Light Source: 3500K CCT, 90 CRI LEDS
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 9895.6 lumens
Efficiency: N/A
Efficacy: 103.9 lumens/watt
Spacing Criteria (0/90/45): 1.17 / 1.17 / 1.27
Luminous Opening: Circular (Dia: 1.58' x H: 0')
CIE Type: Direct

Input Watts (W): 95.2
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: 0.5 HR
Operation Time: 3 HR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P866798

CATALOG NUMBER: PRLX-2001-L-935-117L-L-X-X-GREY-X

Luminous Intensity Polar Plot

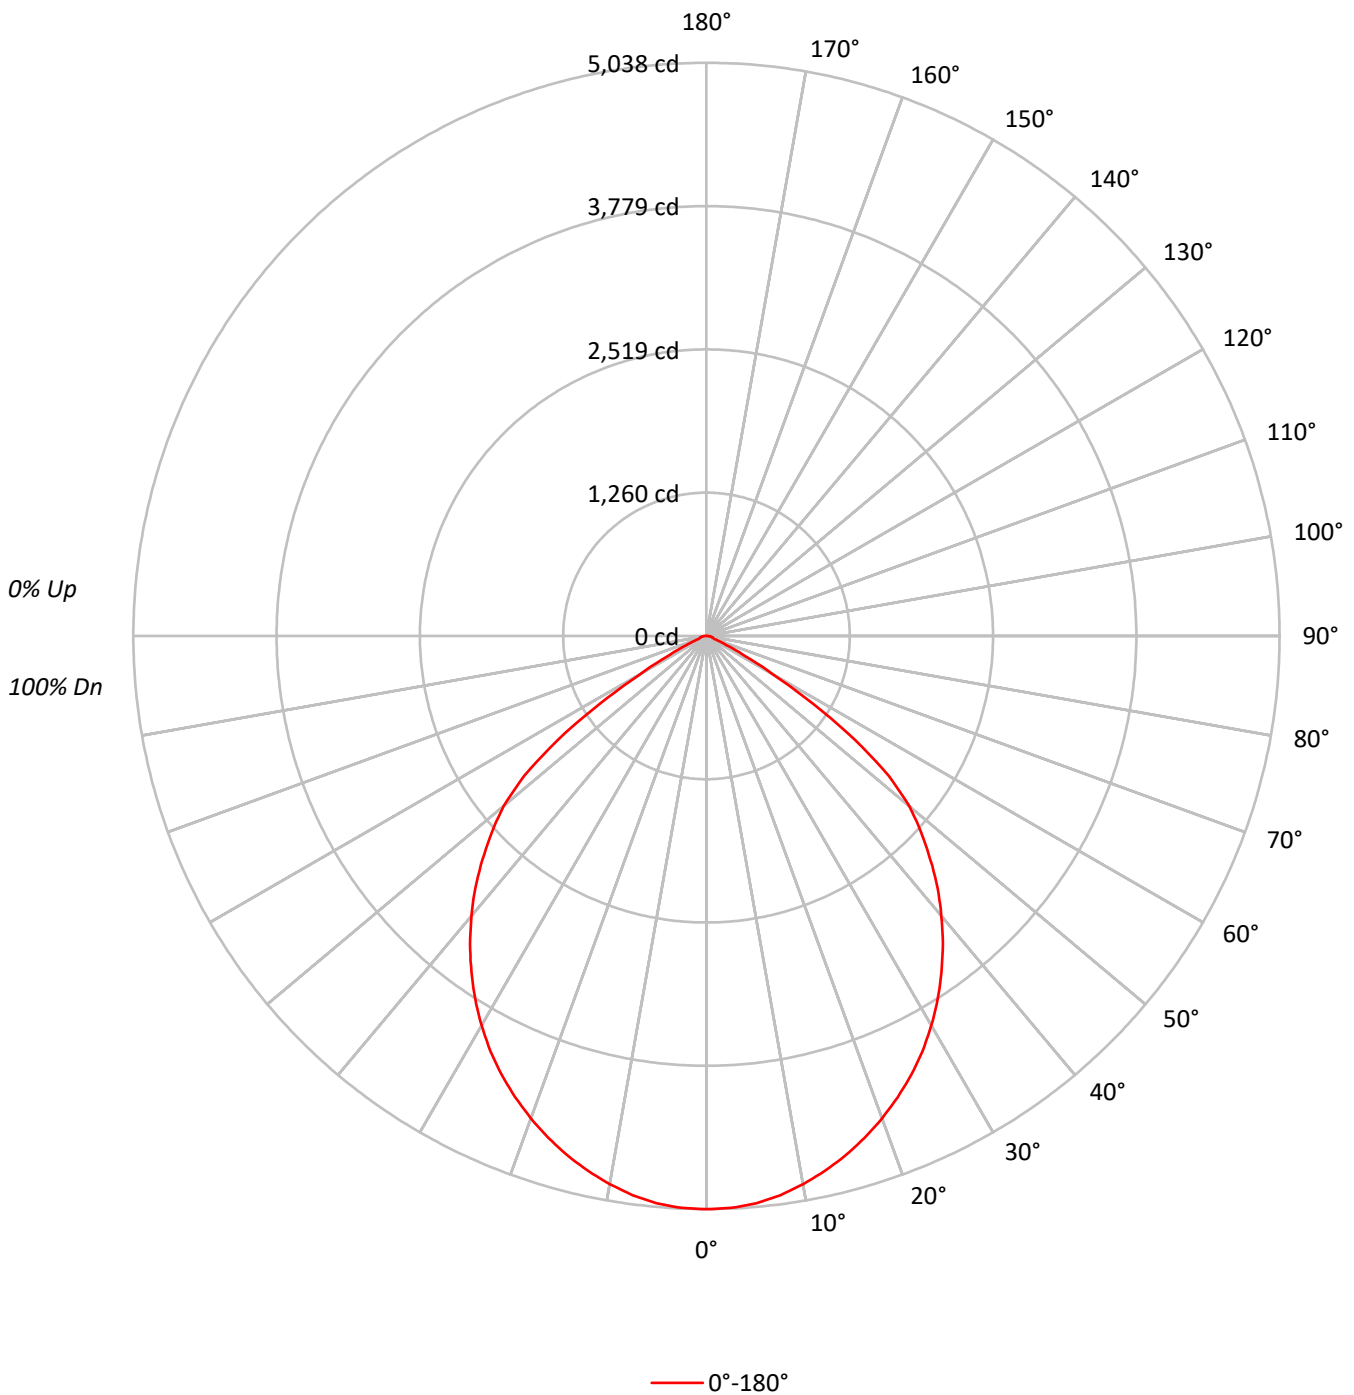



TEST NUMBER: P866798

CATALOG NUMBER: PRLX-2001-L-935-117L-L-X-X-GREY-X

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	112	108	105	102	109	106	103	100	102	99	97	98	96	94	94	93	91	90
2	104	97	92	87	101	95	91	86	92	88	84	89	86	83	86	83	81	79
3	96	88	81	76	94	86	80	75	83	78	74	81	76	73	78	75	71	69
4	89	79	72	66	87	78	71	66	75	70	65	73	68	64	71	67	63	61
5	83	72	64	58	81	71	63	58	69	62	57	67	61	57	65	60	56	54
6	77	65	57	52	75	64	57	52	63	56	51	61	55	51	60	54	50	49
7	72	60	52	46	70	59	51	46	57	51	46	56	50	46	55	49	45	44
8	67	55	47	42	65	54	47	42	53	46	41	52	46	41	51	45	41	39
9	63	50	43	38	61	50	43	38	49	42	38	48	42	37	47	41	37	36
10	59	47	39	35	58	46	39	35	45	39	34	44	38	34	44	38	34	33

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	27544
5°	27467
10°	27166
15°	26755
20°	26255
25°	25684
30°	24961
35°	24042
40°	22924
45°	21528
50°	19779
55°	15273
60°	7384
65°	2786
70°	1098
75°	1208
80°	1376
85°	1568

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 21528 cd/sqm

TEST NUMBER: P866798

CATALOG NUMBER: PRLX-2001-L-935-117L-L-X-X-GREY-X

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	474.2	4.8
10°-20°	1331.9	13.5
20°-30°	1958.9	19.8
30°-40°	2249.8	22.7
40°-50°	2144.7	21.7
50°-60°	1384.5	14.0
60°-70°	266.0	2.7
70°-80°	59.9	0.6
80°-90°	25.8	0.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	3765.0	38.0
0°-40°	6014.8	60.8
0°-60°	9543.9	96.4
0°-90°	9895.6	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	9895.6	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	5038	
5°	5005	474
15°	4727	1332
25°	4258	1959
35°	3602	2250
45°	2784	2145
55°	1602	1384
65°	215	266
75°	57	60
85°	25	26
90°	0	

TEST NUMBER: P866798

CATALOG NUMBER: PRLX-2001-L-935-117L-L-X-X-GREY-X

CANDELA DISTRIBUTION (FULL):

0°	
0°	5038.3
2.5°	5032.1
5°	5005.1
7.5°	4959.3
10°	4893.7
12.5°	4815.7
15°	4727.2
17.5°	4625.2
20°	4512.9
22.5°	4389.0
25°	4257.9
27.5°	4113.3
30°	3954.1
32.5°	3783.4
35°	3602.4
37.5°	3414.0
40°	3212.2
42.5°	3009.3
45°	2784.5
47.5°	2562.9
50°	2325.6
52.5°	2018.7
55°	1602.4
57.5°	1116.5
60°	675.3
62.5°	387.1
65°	215.4
67.5°	112.4
70°	68.7
72.5°	62.4
75°	57.2
77.5°	51.0
80°	43.7
82.5°	35.4
85°	25.0
87.5°	12.5
90°	0.0



TEST NUMBER: P866798
 CATALOG NUMBER: PRLX-2001-L-935-117L-L-X-X-GREY-X

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	19.42	20.83	19.79	21.14	21.45	19.42	20.83	19.79	21.14	21.45
	3H	19.35	20.58	19.73	20.91	21.28	19.35	20.58	19.73	20.91	21.28
	4H	19.30	20.45	19.70	20.80	21.18	19.30	20.45	19.70	20.80	21.18
	6H	19.26	20.31	19.67	20.68	21.07	19.26	20.31	19.67	20.68	21.07
	8H	19.23	20.23	19.66	20.62	21.02	19.23	20.23	19.66	20.62	21.02
	12H	19.21	20.16	19.64	20.54	20.97	19.21	20.16	19.64	20.54	20.97
4H	2H	19.30	20.45	19.71	20.80	21.18	19.30	20.45	19.71	20.80	21.18
	3H	19.25	20.17	19.66	20.57	20.98	19.25	20.17	19.66	20.57	20.98
	4H	19.20	20.02	19.63	20.44	20.88	19.20	20.02	19.63	20.44	20.88
	6H	19.17	19.88	19.63	20.33	20.79	19.17	19.88	19.63	20.33	20.79
	8H	19.15	19.81	19.61	20.26	20.73	19.15	19.81	19.61	20.26	20.73
	12H	19.13	19.72	19.61	20.20	20.67	19.13	19.72	19.61	20.20	20.67
8H	4H	19.09	19.75	19.56	20.20	20.67	19.09	19.75	19.56	20.20	20.67
	6H	19.06	19.60	19.56	20.10	20.58	19.06	19.60	19.56	20.10	20.58
	8H	19.04	19.53	19.56	20.05	20.54	19.04	19.53	19.56	20.05	20.54
	12H	19.04	19.48	19.55	19.98	20.54	19.04	19.48	19.55	19.98	20.54
12H	4H	19.05	19.63	19.53	20.12	20.59	19.05	19.63	19.53	20.12	20.59
	6H	19.00	19.50	19.52	20.01	20.50	19.00	19.50	19.52	20.01	20.50
	8H	19.01	19.45	19.52	19.95	20.52	19.01	19.45	19.52	19.95	20.52