

Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: PrentaLux

Report Number: P865898

Luminaire Tested: PRLX-2001-M-927-07L-L-U-S-X-X-GREY-X

Issue Date: 8/20/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P865898  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2304-993-48)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 8/20/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: Prenalux  
Catalog Number: PRLX-2001-M-927-07L-L-U-S-X-X-GREY-X  
Description: PRENTALUX 3D PRINTED PENDANT LED LUMINAIRE, MEDIUM LIGHT ENGINE, FLAT LENS,  
TAPERED DRUM WITH GRAY INTERIOR SHADE.  
LIGHT LEVEL 1  
Light Source: 2700K CCT, 90 CRI LEDS  
Ballast/Driver: -


**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 534.3 lumens  
Efficiency: N/A  
Efficacy: 65.2 lumens/watt  
Spacing Criteria (0/90/45): 1.15 / 1.15 / 1.27  
Luminous Opening: Circular (Dia: 1.27' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 8.2  
Input Voltage (V): 120  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: 0.5 HR  
Operation Time: 3 HR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P865898

CATALOG NUMBER: PRLX-2001-M-927-07L-L-U-S-X-X-GREY-X

### Luminous Intensity Polar Plot

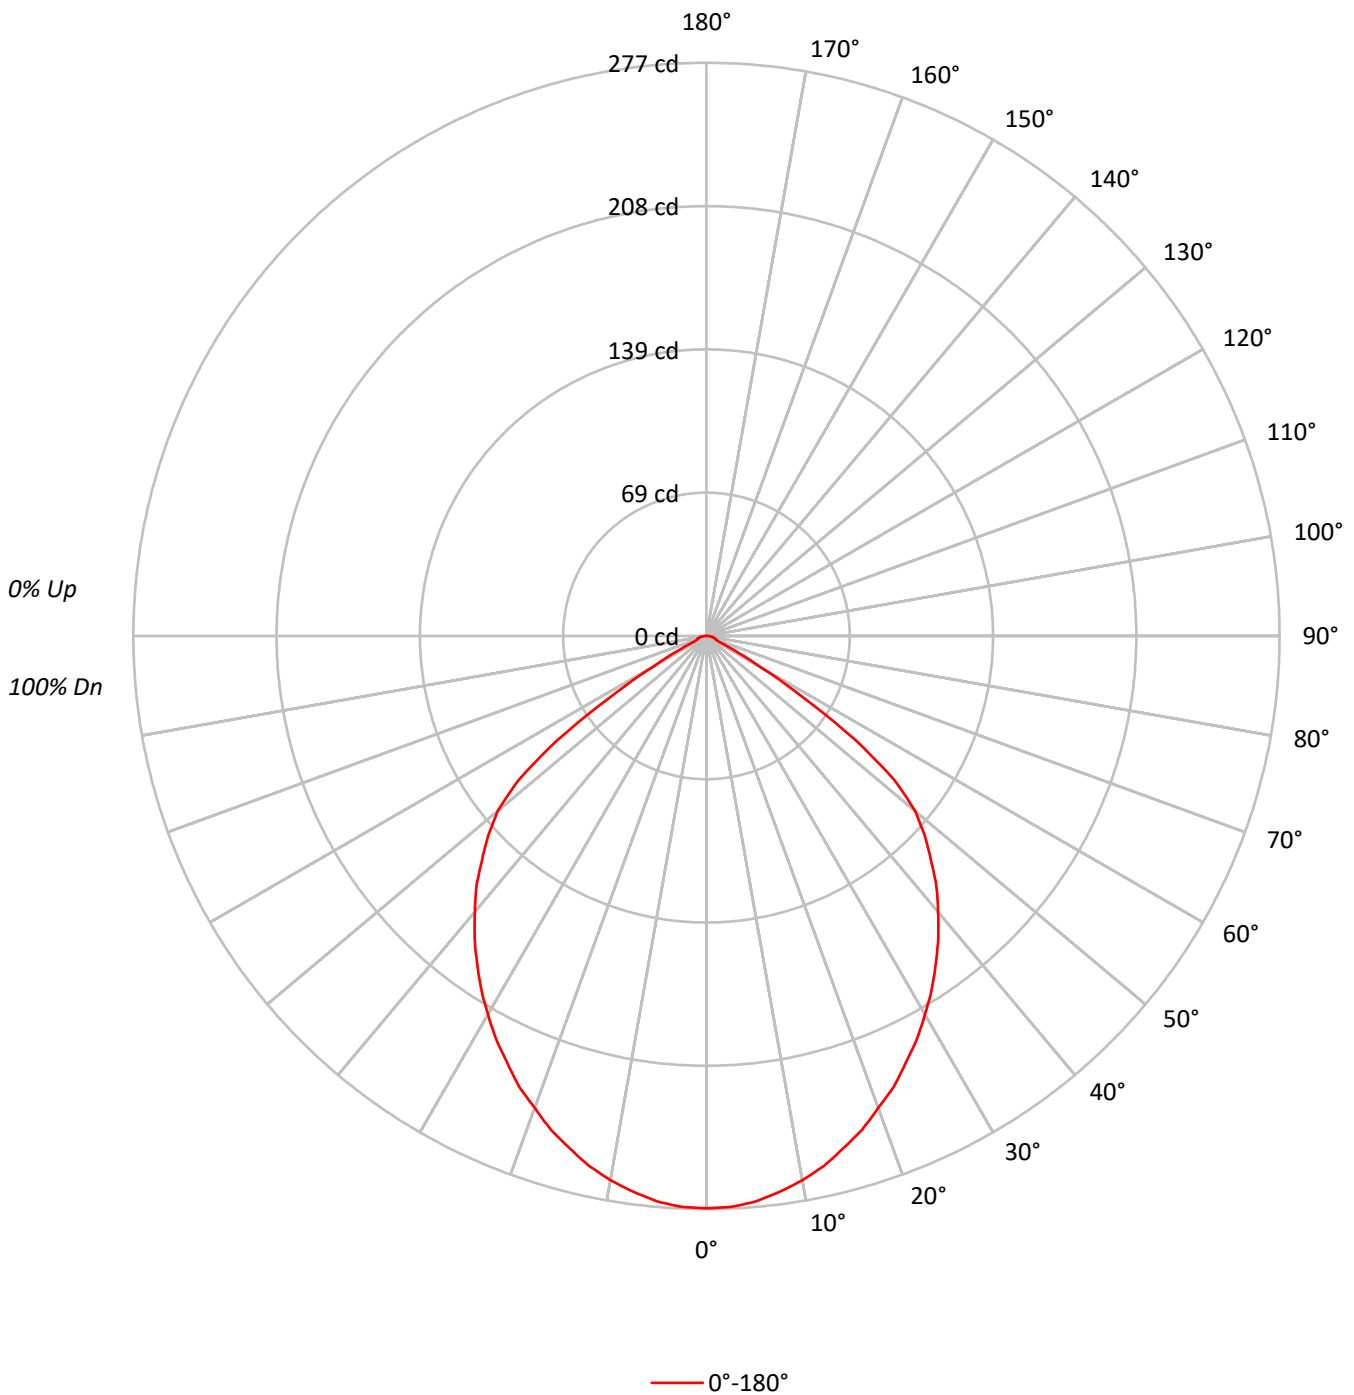



TEST NUMBER: P865898

CATALOG NUMBER: PRLX-2001-M-927-07L-L-U-S-X-X-GREY-X

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	112	108	105	102	109	106	103	100	102	99	97	98	96	94	94	93	91	90
2	104	97	92	87	101	95	91	86	92	88	85	89	86	83	86	83	81	79
3	96	88	81	76	94	86	80	75	83	78	74	81	76	73	78	75	71	70
4	89	79	72	66	87	78	71	66	76	70	65	73	68	64	71	67	63	61
5	83	72	64	58	81	71	63	58	69	62	57	67	61	57	65	60	56	55
6	77	65	57	52	75	64	57	52	63	56	51	61	55	51	60	54	50	49
7	72	60	52	46	70	59	52	46	57	51	46	56	50	46	55	49	45	44
8	67	55	47	42	65	54	47	42	53	46	42	52	46	41	51	45	41	39
9	63	51	43	38	61	50	43	38	49	42	38	48	42	38	47	41	37	36
10	59	47	39	35	58	46	39	35	45	39	34	44	39	34	44	38	34	33

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	2347
5°	2337
10°	2302
15°	2251
20°	2192
25°	2132
30°	2070
35°	2002
40°	1929
45°	1842
50°	1739
55°	1302
60°	514
65°	141
70°	119
75°	128
80°	142
85°	136

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 1842 cd/sqm

TEST NUMBER: P865898

CATALOG NUMBER: PRLX-2001-M-927-07L-L-U-S-X-X-GREY-X

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	25.9	4.9
10°-20°	72.2	13.5
20°-30°	105.0	19.6
30°-40°	120.9	22.6
40°-50°	118.4	22.2
50°-60°	75.3	14.1
60°-70°	11.0	2.1
70°-80°	4.1	0.8
80°-90°	1.5	0.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	203.1	38.0
0°-40°	324.0	60.6
0°-60°	517.7	96.9
0°-90°	534.3	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	534.3	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	277	
5°	274	26
15°	256	72
25°	228	105
35°	193	121
45°	154	118
55°	88	75
65°	7	11
75°	4	4
85°	1	2
90°	0	

TEST NUMBER: P865898

CATALOG NUMBER: PRLX-2001-M-927-07L-L-U-S-X-X-GREY-X

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	276.6
2.5°	276.2
5°	274.3
7.5°	271.0
10°	267.1
12.5°	262.3
15°	256.2
17.5°	250.2
20°	242.7
22.5°	236.1
25°	227.7
27.5°	220.0
30°	211.2
32.5°	202.6
35°	193.3
37.5°	184.0
40°	174.1
42.5°	164.6
45°	153.5
47.5°	143.1
50°	131.7
52.5°	114.6
55°	88.0
57.5°	56.1
60°	30.3
62.5°	15.2
65°	7.0
67.5°	5.0
70°	4.8
72.5°	4.5
75°	3.9
77.5°	3.4
80°	2.9
82.5°	2.1
85°	1.4
87.5°	0.7
90°	0.0



TEST NUMBER: P865898  
 CATALOG NUMBER: PRLX-2001-M-927-07L-L-U-S-X-X-GREY-X

**CIE UGR TABLE:**

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	10.27	11.68	10.64	11.99	12.30	10.27	11.68	10.64	11.99	12.30
	3H	10.21	11.44	10.59	11.77	12.13	10.21	11.44	10.59	11.77	12.13
	4H	10.18	11.33	10.58	11.68	12.06	10.18	11.33	10.58	11.68	12.06
	6H	10.16	11.21	10.57	11.58	11.97	10.16	11.21	10.57	11.58	11.97
	8H	10.14	11.14	10.57	11.53	11.93	10.14	11.14	10.57	11.53	11.93
	12H	10.12	11.07	10.56	11.46	11.89	10.12	11.07	10.56	11.46	11.89
4H	2H	10.12	11.26	10.52	11.61	11.99	10.12	11.26	10.52	11.61	11.99
	3H	10.08	11.00	10.49	11.40	11.81	10.08	11.00	10.49	11.40	11.81
	4H	10.06	10.89	10.50	11.30	11.75	10.06	10.89	10.50	11.30	11.75
	6H	10.08	10.78	10.54	11.23	11.70	10.08	10.78	10.54	11.23	11.70
	8H	10.06	10.73	10.53	11.17	11.64	10.06	10.73	10.53	11.17	11.64
	12H	10.05	10.64	10.54	11.13	11.60	10.05	10.64	10.54	11.13	11.60
8H	4H	9.97	10.63	10.44	11.08	11.55	9.97	10.63	10.44	11.08	11.55
	6H	9.99	10.54	10.49	11.04	11.52	9.99	10.54	10.49	11.04	11.52
	8H	9.99	10.49	10.51	11.00	11.50	9.99	10.49	10.51	11.00	11.50
	12H	10.00	10.45	10.52	10.95	11.51	10.00	10.45	10.52	10.95	11.51
12H	4H	9.93	10.52	10.42	11.00	11.48	9.93	10.52	10.42	11.00	11.48
	6H	9.95	10.44	10.47	10.96	11.45	9.95	10.44	10.47	10.96	11.45
	8H	9.97	10.42	10.49	10.91	11.48	9.97	10.42	10.49	10.91	11.48