

Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: PrentaLux

Report Number: P865476

Luminaire Tested: PRLX-2001-S-930-20L-G-U-S-X-X-BLAK-X

Issue Date: 8/20/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P865476  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2304-993-6)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 8/20/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: Prenalux  
Catalog Number: PRLX-2001-S-930-20L-G-U-S-X-X-BLAK-X  
Description: PRENTALUX 3D PRINTED PENDANT LED LUMINAIRE, SMALL LIGHT ENGINE, GLOBE LENS,  
TAPERED DRUM WITH BLACK INTERIOR SHADE.  
LIGHT LEVEL 4  
Light Source: 3000K CCT, 90 CRI LEDS  
Ballast/Driver: -


**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 580.7 lumens  
Efficiency: N/A  
Efficacy: 26.6 lumens/watt  
Spacing Criteria (0/90/45): 1.52 / 1.52 / 1.69  
Luminous Opening: Circular (Dia: 0.92' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 21.8  
Input Voltage (V): 120  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: 0.5 HR  
Operation Time: 3 HR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P865476

CATALOG NUMBER: PRLX-2001-S-930-20L-G-U-S-X-X-BLAK-X

### Luminous Intensity Polar Plot

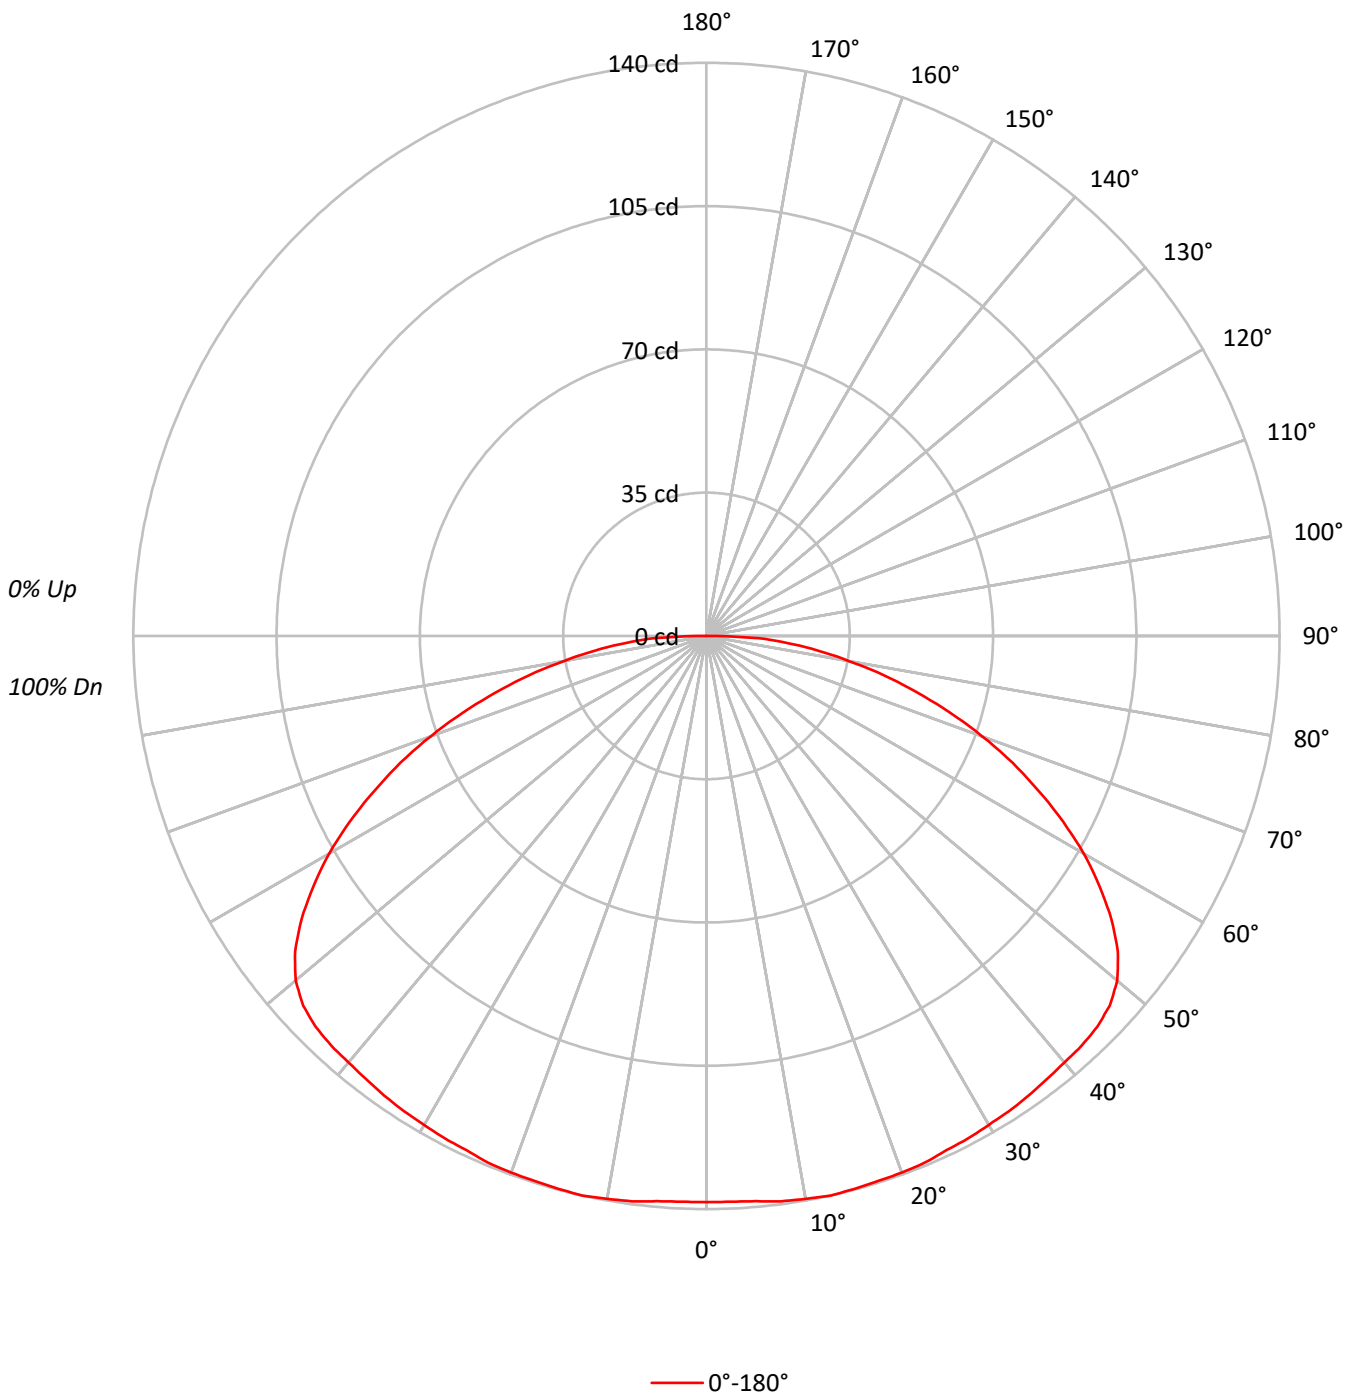



TEST NUMBER: P865476

CATALOG NUMBER: PRLX-2001-S-930-20L-G-U-S-X-X-BLAK-X

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	107	102	97	92	104	99	95	91	95	91	88		91	88	85		87	85	82	80
2	96	87	79	73	93	85	78	72	81	75	70		78	73	68		75	71	67	64
3	87	75	66	59	84	73	65	58	70	63	57		67	61	56		65	60	55	53
4	79	66	56	49	76	64	55	48	62	54	47		59	52	47		57	51	46	44
5	72	58	48	41	70	57	48	41	55	46	40		53	45	40		51	44	39	37
6	66	52	42	35	64	51	42	35	49	41	35		47	40	34		45	39	34	32
7	61	46	37	30	59	46	37	30	44	36	30		43	35	30		41	35	30	27
8	57	42	33	27	55	41	33	27	40	32	27		39	32	26		37	31	26	24
9	53	38	30	24	51	38	29	24	37	29	24		35	28	23		34	28	23	21
10	49	35	27	21	48	35	27	21	34	26	21		33	26	21		32	25	21	19

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	2256
5°	2269
10°	2312
15°	2361
20°	2421
25°	2494
30°	2597
35°	2730
40°	2896
45°	3114
50°	3324
55°	3435
60°	3474
65°	3454
70°	3419
75°	3353
80°	3325
85°	3687

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 87.5°  
 Luminance: 4786 cd/sqm

TEST NUMBER: P865476

CATALOG NUMBER: PRLX-2001-S-930-20L-G-U-S-X-X-BLAK-X

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	13.3	2.3
10°-20°	39.6	6.8
20°-30°	64.2	11.1
30°-40°	86.1	14.8
40°-50°	104.1	17.9
50°-60°	107.5	18.5
60°-70°	88.5	15.2
70°-80°	56.3	9.7
80°-90°	21.2	3.6
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	117.1	20.2
0°-40°	203.1	35.0
0°-60°	414.7	71.4
0°-90°	580.7	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	580.7	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	138	
5°	139	13
15°	140	40
25°	139	64
35°	137	86
45°	135	104
55°	121	107
65°	90	89
75°	53	56
85°	20	21
90°	0	

TEST NUMBER: P865476

CATALOG NUMBER: PRLX-2001-S-930-20L-G-U-S-X-X-BLAK-X

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	138.3
2.5°	138.3
5°	138.6
7.5°	139.3
10°	139.6
12.5°	140.0
15°	139.8
17.5°	139.6
20°	139.5
22.5°	139.3
25°	138.6
27.5°	138.4
30°	137.9
32.5°	137.6
35°	137.1
37.5°	136.5
40°	136.0
42.5°	135.7
45°	135.0
47.5°	133.6
50°	131.0
52.5°	126.7
55°	120.8
57.5°	113.9
60°	106.5
62.5°	98.2
65°	89.5
67.5°	80.9
70°	71.7
72.5°	62.4
75°	53.2
77.5°	44.4
80°	35.4
82.5°	27.5
85°	19.7
87.5°	12.8
90°	0.0



TEST NUMBER: P865476  
 CATALOG NUMBER: PRLX-2001-S-930-20L-G-U-S-X-X-BLAK-X

**CIE UGR TABLE:**

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	16.92	18.68	17.28	19.00	19.31	16.92	18.68	17.28	19.00	19.31
	3H	19.00	20.61	19.37	20.93	21.29	19.00	20.61	19.37	20.93	21.29
	4H	19.83	21.36	20.22	21.70	22.07	19.83	21.36	20.22	21.70	22.07
	6H	20.52	21.94	20.93	22.30	22.69	20.52	21.94	20.93	22.30	22.69
	8H	20.79	22.16	21.22	22.55	22.94	20.79	22.16	21.22	22.55	22.94
	12H	21.03	22.34	21.46	22.72	23.15	21.03	22.34	21.46	22.72	23.15
4H	2H	17.64	19.17	18.04	19.52	19.89	17.64	19.17	18.04	19.52	19.89
	3H	19.95	21.25	20.36	21.64	22.04	19.95	21.25	20.36	21.64	22.04
	4H	20.92	22.11	21.35	22.52	22.95	20.92	22.11	21.35	22.52	22.95
	6H	21.77	22.81	22.22	23.25	23.70	21.77	22.81	22.22	23.25	23.70
	8H	22.11	23.09	22.57	23.53	23.99	22.11	23.09	22.57	23.53	23.99
	12H	22.42	23.31	22.90	23.78	24.25	22.42	23.31	22.90	23.78	24.25
8H	4H	21.33	22.31	21.79	22.75	23.21	21.33	22.31	21.79	22.75	23.21
	6H	22.33	23.16	22.82	23.64	24.11	22.33	23.16	22.82	23.64	24.11
	8H	22.78	23.52	23.29	24.03	24.51	22.78	23.52	23.29	24.03	24.51
	12H	23.22	23.88	23.72	24.36	24.92	23.22	23.88	23.72	24.36	24.92
12H	4H	21.40	22.29	21.88	22.76	23.22	21.40	22.29	21.88	22.76	23.22
	6H	22.44	23.18	22.94	23.68	24.16	22.44	23.18	22.94	23.68	24.16
	8H	22.97	23.63	23.47	24.11	24.67	22.97	23.63	23.47	24.11	24.67