

Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: PrentaLux

Report Number: P865555

Luminaire Tested: PRLX-2001-S-940-15L-L-U-S-X-X-WHHR-X

Issue Date: 8/20/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P865555  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2304-993-15)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 8/20/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: Prenalux  
Catalog Number: PRLX-2001-S-940-15L-L-U-S-X-X-WHHR-X  
Description: PRENTALUX 3D PRINTED PENDANT LED LUMINAIRE, SMALL LIGHT ENGINE, FLAT LENS, TAPERED DRUM WITH WHITE INTERIOR SHADE.  
LIGHT LEVEL 3  
Light Source: 4000K CCT, 90 CRI LEDS  
Ballast/Driver: -


**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 1551.4 lumens  
Efficiency: N/A  
Efficacy: 99.4 lumens/watt  
Spacing Criteria (0/90/45): 1.2 / 1.2 / 1.31  
Luminous Opening: Circular (Dia: 0.92' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 15.6  
Input Voltage (V): 120  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: 0.5 HR  
Operation Time: 3 HR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P865555

CATALOG NUMBER: PRLX-2001-S-940-15L-L-U-S-X-X-WHHR-X

### Luminous Intensity Polar Plot

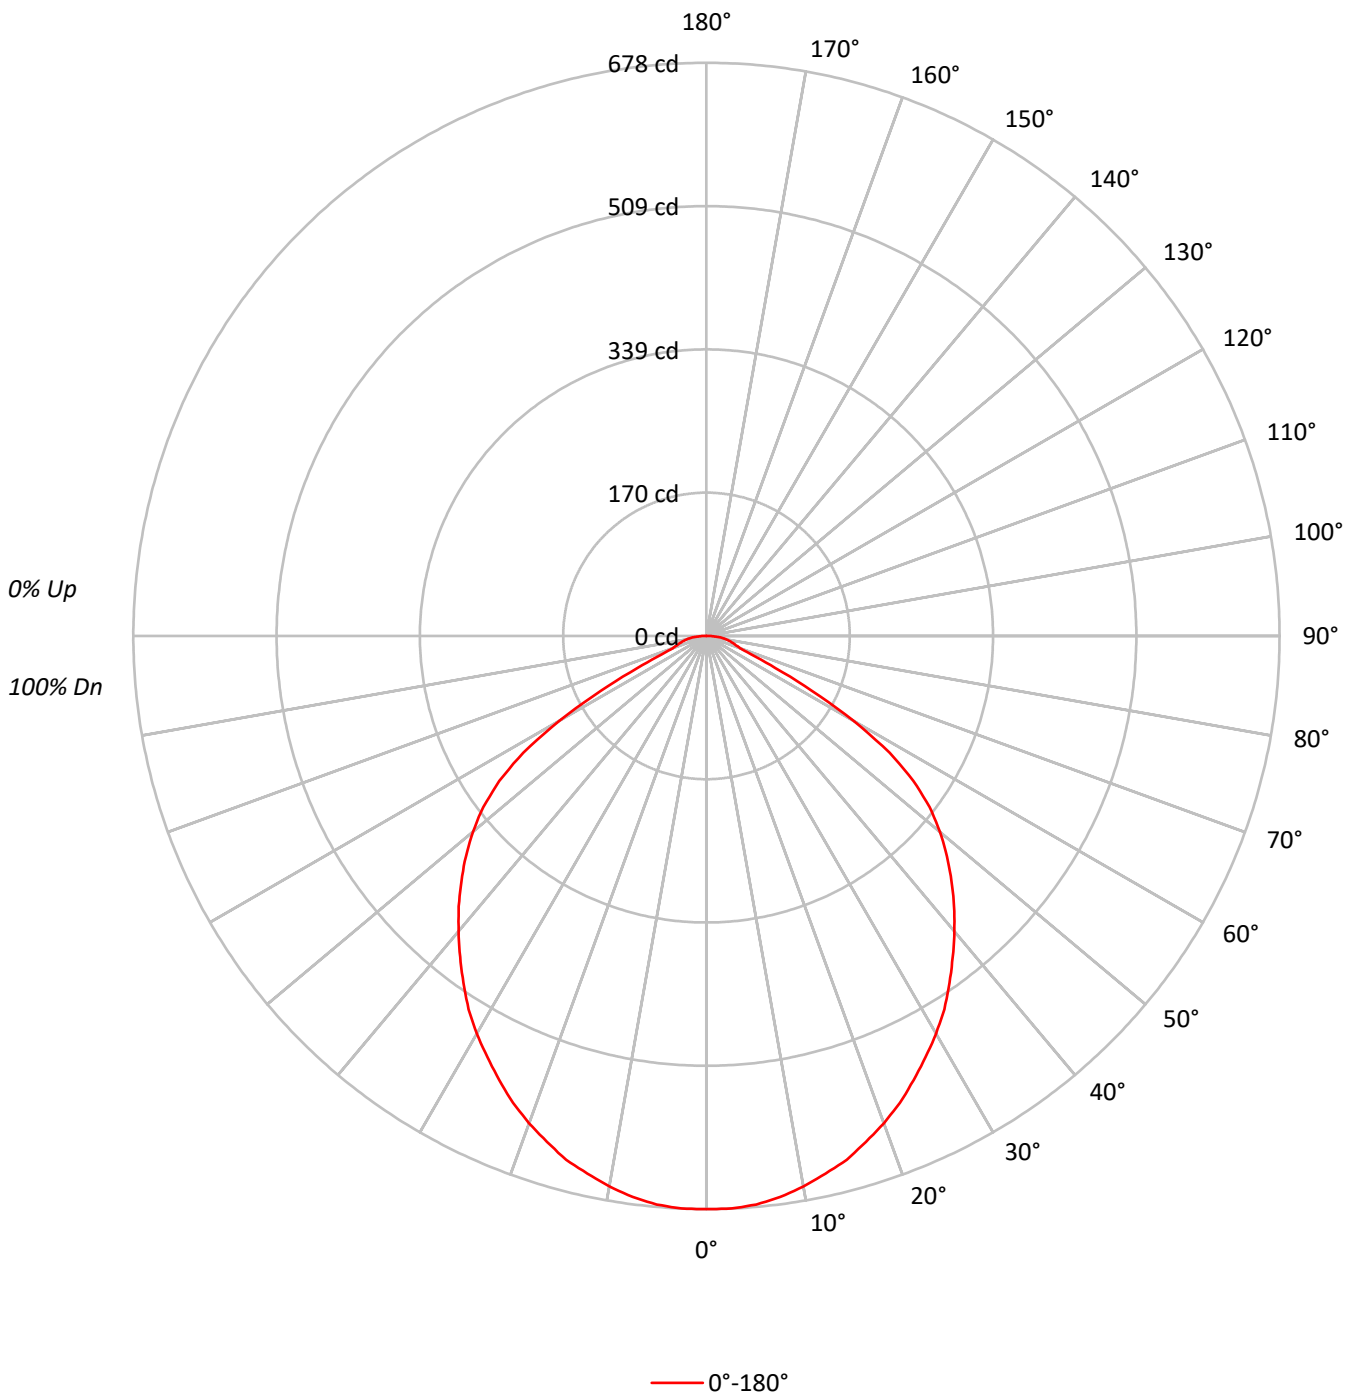



TEST NUMBER: P865555

CATALOG NUMBER: PRLX-2001-S-940-15L-L-U-S-X-X-WHHR-X

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	111	106	103	100	108	104	101	98	100	97	95	96	94	92	93	91	89	87
2	102	95	89	84	99	93	87	83	89	85	81	86	82	79	83	80	77	75
3	94	84	77	71	91	83	76	71	80	74	69	77	72	68	75	71	67	65
4	86	75	67	61	84	74	67	61	72	65	60	69	64	59	67	63	59	57
5	80	68	60	54	78	67	59	53	65	58	53	63	57	52	61	56	52	50
6	74	61	53	47	72	61	53	47	59	52	47	57	51	46	56	50	46	44
7	69	56	48	42	67	55	47	42	54	47	41	52	46	41	51	45	41	39
8	64	51	43	38	62	50	43	37	49	42	37	48	42	37	47	41	37	35
9	60	47	39	34	58	46	39	34	45	38	34	44	38	33	43	38	33	32
10	56	43	36	31	55	43	36	31	42	35	31	41	35	31	40	34	30	29

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	11058
5°	11053
10°	10949
15°	10832
20°	10647
25°	10432
30°	10230
35°	9977
40°	9713
45°	9455
50°	9152
55°	8502
60°	6547
65°	3466
70°	2008
75°	2035
80°	2245
85°	2620

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 9455 cd/sqm

TEST NUMBER: P865555

CATALOG NUMBER: PRLX-2001-S-940-15L-L-U-S-X-X-WHHR-X

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	64.0	4.1
10°-20°	180.5	11.6
20°-30°	267.2	17.2
30°-40°	313.5	20.2
40°-50°	316.1	20.4
50°-60°	260.9	16.8
60°-70°	100.5	6.5
70°-80°	34.3	2.2
80°-90°	14.3	0.9
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	511.7	33.0
0°-40°	825.2	53.2
0°-60°	1402.3	90.4
0°-90°	1551.4	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1551.4	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	678	
5°	675	64
15°	642	181
25°	580	267
35°	501	313
45°	410	316
55°	299	261
65°	90	100
75°	32	34
85°	14	14
90°	0	

TEST NUMBER: P865555

CATALOG NUMBER: PRLX-2001-S-940-15L-L-U-S-X-X-WHHR-X

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	678.0
2.5°	678.0
5°	675.1
7.5°	669.5
10°	661.1
12.5°	651.3
15°	641.5
17.5°	627.4
20°	613.4
22.5°	597.9
25°	579.7
27.5°	561.5
30°	543.2
32.5°	523.6
35°	501.1
37.5°	478.6
40°	456.2
42.5°	433.7
45°	409.9
47.5°	386.0
50°	360.7
52.5°	332.7
55°	299.0
57.5°	256.9
60°	200.7
62.5°	140.4
65°	89.8
67.5°	57.5
70°	42.1
72.5°	36.5
75°	32.3
77.5°	28.1
80°	23.9
82.5°	19.7
85°	14.0
87.5°	7.0
90°	0.0



TEST NUMBER: P865555  
 CATALOG NUMBER: PRLX-2001-S-940-15L-L-U-S-X-X-WHHR-X

**CIE UGR TABLE:**

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	19.40	20.92	19.77	21.23	21.54	19.40	20.92	19.77	21.23	21.54
	3H	19.54	20.89	19.92	21.22	21.58	19.54	20.89	19.92	21.22	21.58
	4H	19.61	20.86	20.01	21.21	21.59	19.61	20.86	20.01	21.21	21.59
	6H	19.69	20.85	20.10	21.21	21.61	19.69	20.85	20.10	21.21	21.61
	8H	19.73	20.83	20.16	21.22	21.62	19.73	20.83	20.16	21.22	21.62
	12H	19.77	20.83	20.20	21.21	21.64	19.77	20.83	20.20	21.21	21.64
4H	2H	19.44	20.70	19.84	21.05	21.43	19.44	20.70	19.84	21.05	21.43
	3H	19.66	20.69	20.07	21.09	21.49	19.66	20.69	20.07	21.09	21.49
	4H	19.77	20.70	20.21	21.11	21.55	19.77	20.70	20.21	21.11	21.55
	6H	19.94	20.74	20.40	21.19	21.65	19.94	20.74	20.40	21.19	21.65
	8H	20.03	20.77	20.49	21.22	21.69	20.03	20.77	20.49	21.22	21.69
	12H	20.12	20.78	20.60	21.26	21.74	20.12	20.78	20.60	21.26	21.74
8H	4H	19.77	20.52	20.24	20.96	21.43	19.77	20.52	20.24	20.96	21.43
	6H	20.01	20.62	20.50	21.12	21.59	20.01	20.62	20.50	21.12	21.59
	8H	20.15	20.70	20.66	21.22	21.70	20.15	20.70	20.66	21.22	21.70
	12H	20.31	20.81	20.82	21.30	21.86	20.31	20.81	20.82	21.30	21.86
12H	4H	19.76	20.42	20.24	20.90	21.38	19.76	20.42	20.24	20.90	21.38
	6H	20.00	20.56	20.52	21.07	21.56	20.00	20.56	20.52	21.07	21.56
	8H	20.19	20.69	20.70	21.18	21.75	20.19	20.69	20.70	21.18	21.75