

Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: PrentaLux

Report Number: P867142

Luminaire Tested: PRLX-2002-L-940-32L-L-X-X-GREY-X

Issue Date: 8/20/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P867142  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2304-993-82)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 8/20/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: Prenalux  
Catalog Number: PRLX-2002-L-940-32L-L-X-X-GREY-X  
Description: PRENTALUX 3D PRINTED PENDANT LED LUMINAIRE, LARGE LIGHT ENGINE, FLAT LENS, TRUNCATED DOME WITH GRAY INTERIOR SHADE.  
LIGHT LEVEL 2  
Light Source: 4000K CCT, 90 CRI LEDS  
Ballast/Driver: -


**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 2841.3 lumens  
Efficiency: N/A  
Efficacy: 108.9 lumens/watt  
Spacing Criteria (0/90/45): 1.17 / 1.17 / 1.27  
Luminous Opening: Circular (Dia: 1.67' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 26.1  
Input Voltage (V): 120  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: 0.5 HR  
Operation Time: 3 HR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P867142

CATALOG NUMBER: PRLX-2002-L-940-32L-L-X-X-GREY-X

### Luminous Intensity Polar Plot

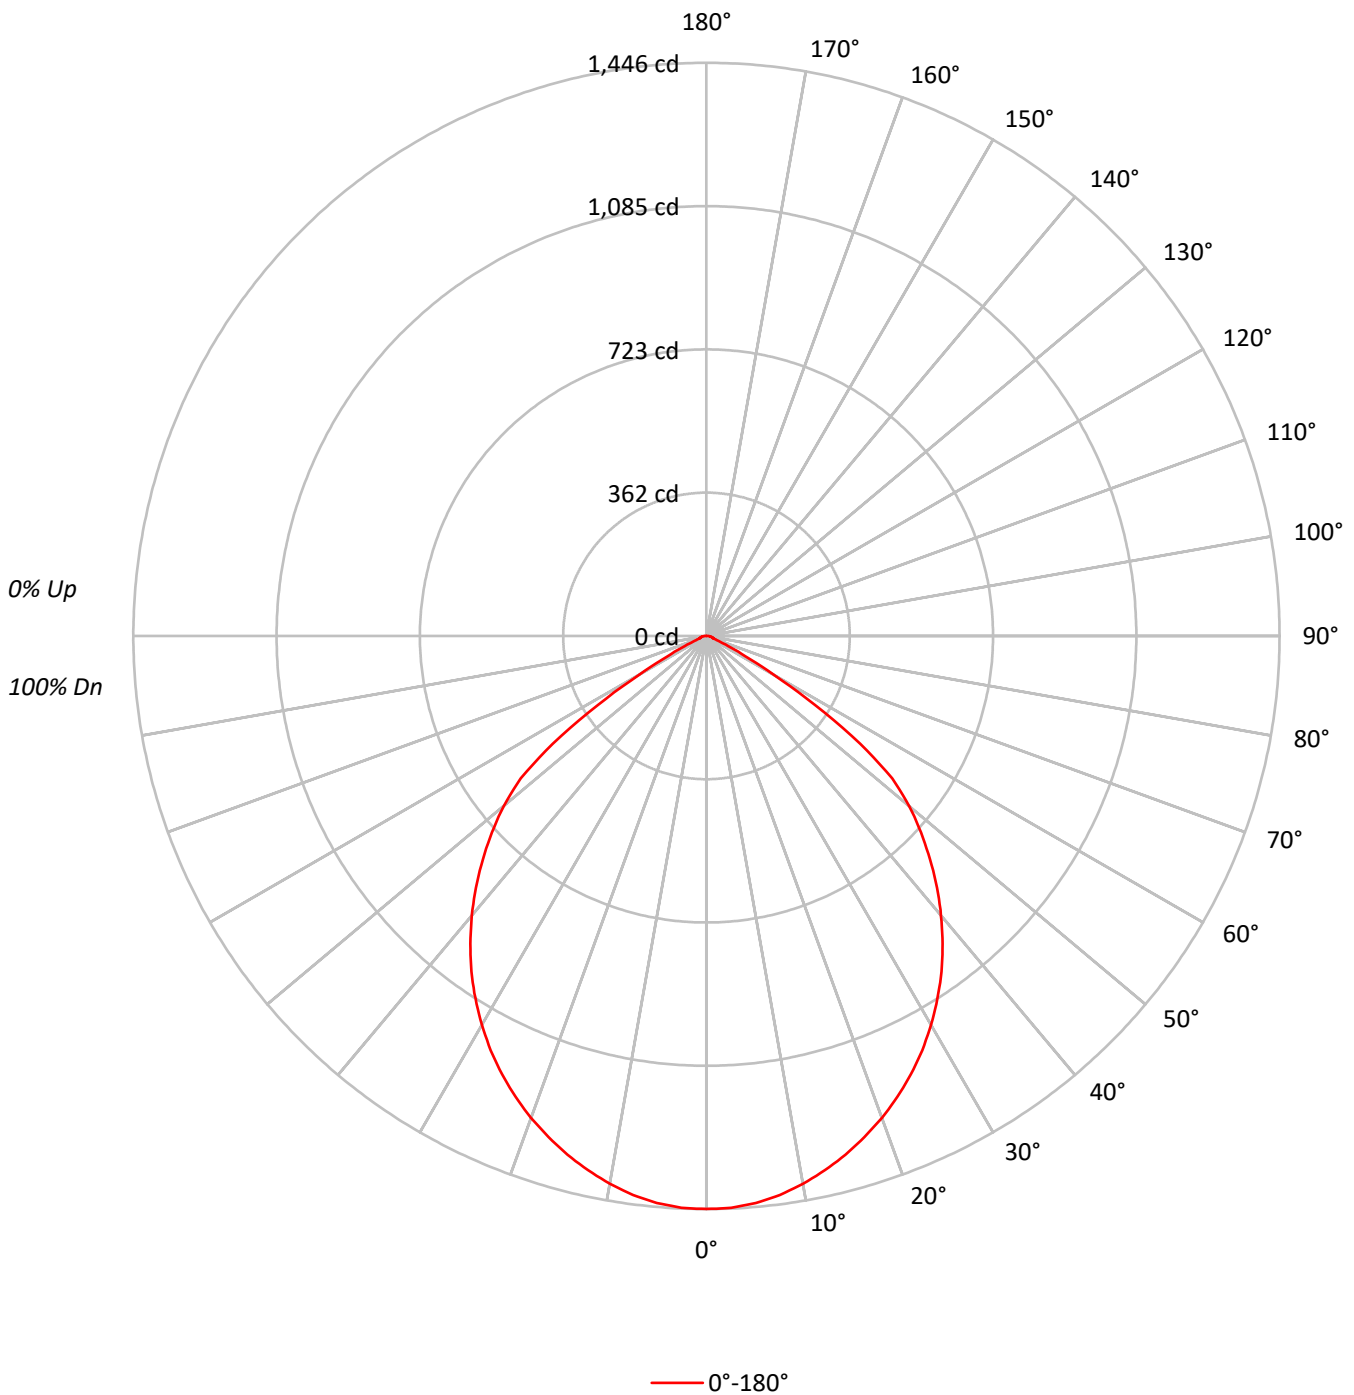



TEST NUMBER: P867142

CATALOG NUMBER: PRLX-2002-L-940-32L-L-X-X-GREY-X

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	112	108	105	102	109	106	103	100	102	99	97		98	96	94		94	93	91	90
2	104	97	92	87	101	95	91	86	92	88	84		89	86	83		86	83	81	79
3	96	88	81	76	94	86	80	75	83	78	74		81	76	73		78	75	71	69
4	89	79	72	66	87	78	71	66	75	70	65		73	68	64		71	67	63	61
5	83	72	64	58	81	71	63	58	69	62	57		67	61	57		65	60	56	54
6	77	65	57	52	75	64	57	52	63	56	51		61	55	51		60	54	50	48
7	72	60	52	46	70	59	51	46	57	51	46		56	50	46		55	49	45	43
8	67	55	47	42	65	54	47	42	53	46	41		52	46	41		50	45	41	39
9	63	50	43	38	61	50	43	38	49	42	38		48	42	37		47	41	37	36
10	59	47	39	35	58	46	39	34	45	39	34		44	38	34		43	38	34	32

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	7132
5°	7111
10°	7032
15°	6920
20°	6793
25°	6644
30°	6457
35°	6228
40°	5930
45°	5565
50°	5128
55°	4076
60°	1919
65°	693
70°	267
75°	295
80°	338
85°	408

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 5565 cd/sqm

TEST NUMBER: P867142

CATALOG NUMBER: PRLX-2002-L-940-32L-L-X-X-GREY-X

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	136.0	4.8
10°-20°	381.8	13.4
20°-30°	561.5	19.8
30°-40°	645.2	22.7
40°-50°	614.5	21.6
50°-60°	404.1	14.2
60°-70°	74.7	2.6
70°-80°	16.3	0.6
80°-90°	7.3	0.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1079.3	38.0
0°-40°	1724.5	60.7
0°-60°	2743.0	96.5
0°-90°	2841.3	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2841.3	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	1446	
5°	1436	136
15°	1355	382
25°	1220	562
35°	1034	645
45°	798	614
55°	474	404
65°	59	75
75°	16	16
85°	7	7
90°	0	

TEST NUMBER: P867142

CATALOG NUMBER: PRLX-2002-L-940-32L-L-X-X-GREY-X

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	1445.6
2.5°	1444.2
5°	1435.8
7.5°	1422.4
10°	1403.6
12.5°	1380.6
15°	1354.7
17.5°	1325.4
20°	1293.8
22.5°	1258.6
25°	1220.5
27.5°	1178.7
30°	1133.4
32.5°	1084.8
35°	1034.1
37.5°	978.6
40°	920.7
42.5°	861.4
45°	797.5
47.5°	734.3
50°	668.1
52.5°	590.5
55°	473.9
57.5°	324.8
60°	194.5
62.5°	109.5
65°	59.4
67.5°	29.8
70°	18.5
72.5°	17.0
75°	15.5
77.5°	14.0
80°	11.9
82.5°	9.8
85°	7.2
87.5°	3.9
90°	0.0



TEST NUMBER: P867142  
 CATALOG NUMBER: PRLX-2002-L-940-32L-L-X-X-GREY-X

**CIE UGR TABLE:**

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	14.82	16.22	15.18	16.53	16.85	14.82	16.22	15.18	16.53	16.85
	3H	14.74	15.97	15.12	16.30	16.66	14.74	15.97	15.12	16.30	16.66
	4H	14.69	15.83	15.09	16.18	16.57	14.69	15.83	15.09	16.18	16.57
	6H	14.64	15.69	15.05	16.06	16.45	14.64	15.69	15.05	16.06	16.45
	8H	14.61	15.61	15.04	16.00	16.40	14.61	15.61	15.04	16.00	16.40
	12H	14.59	15.54	15.02	15.92	16.35	14.59	15.54	15.02	15.92	16.35
4H	2H	14.69	15.84	15.09	16.19	16.57	14.69	15.84	15.09	16.19	16.57
	3H	14.62	15.55	15.04	15.95	16.36	14.62	15.55	15.04	15.95	16.36
	4H	14.57	15.39	15.01	15.81	16.26	14.57	15.39	15.01	15.81	16.26
	6H	14.54	15.25	15.00	15.70	16.16	14.54	15.25	15.00	15.70	16.16
	8H	14.51	15.18	14.98	15.62	16.09	14.51	15.18	14.98	15.62	16.09
	12H	14.49	15.08	14.98	15.56	16.04	14.49	15.08	14.98	15.56	16.04
8H	4H	14.46	15.12	14.93	15.57	16.04	14.46	15.12	14.93	15.57	16.04
	6H	14.42	14.97	14.92	15.46	15.94	14.42	14.97	14.92	15.46	15.94
	8H	14.40	14.89	14.92	15.41	15.90	14.40	14.89	14.92	15.41	15.90
	12H	14.39	14.84	14.91	15.33	15.90	14.39	14.84	14.91	15.33	15.90
12H	4H	14.42	15.01	14.90	15.49	15.96	14.42	15.01	14.90	15.49	15.96
	6H	14.37	14.86	14.89	15.38	15.87	14.37	14.86	14.89	15.38	15.87
	8H	14.37	14.81	14.88	15.31	15.88	14.37	14.81	14.88	15.31	15.88