

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: PrentaLux

Report Number: P866241

Luminaire Tested: PRLX-2002-M-930-35L-L-U-S-X-X-BRSS-X

Issue Date: 8/20/2024

Test Information

Test Method: LM-79-2019
Report Number: P866241
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2304-993-51)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 8/20/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: Prenalux
Catalog Number: PRLX-2002-M-930-35L-L-U-S-X-X-BRSS-X
Description: PRENTALUX 3D PRINTED PENDANT LED LUMINAIRE, MEDIUM LIGHT ENGINE, FLAT LENS, TRUNCATED DOME WITH BRASS INTERIOR SHADE.
LIGHT LEVEL 4
Light Source: 3000K CCT, 90 CRI LEDS
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 2855.9 lumens
Efficiency: N/A
Efficacy: 95.2 lumens/watt
Spacing Criteria (0/90/45): 1.16 / 1.16 / 1.27
Luminous Opening: Circular (Dia: 1.31' x H: 0')
CIE Type: Direct

Input Watts (W): 30
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: 0.5 HR
Operation Time: 3 HR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P866241

CATALOG NUMBER: PRLX-2002-M-930-35L-L-U-S-X-X-BRSS-X

Luminous Intensity Polar Plot

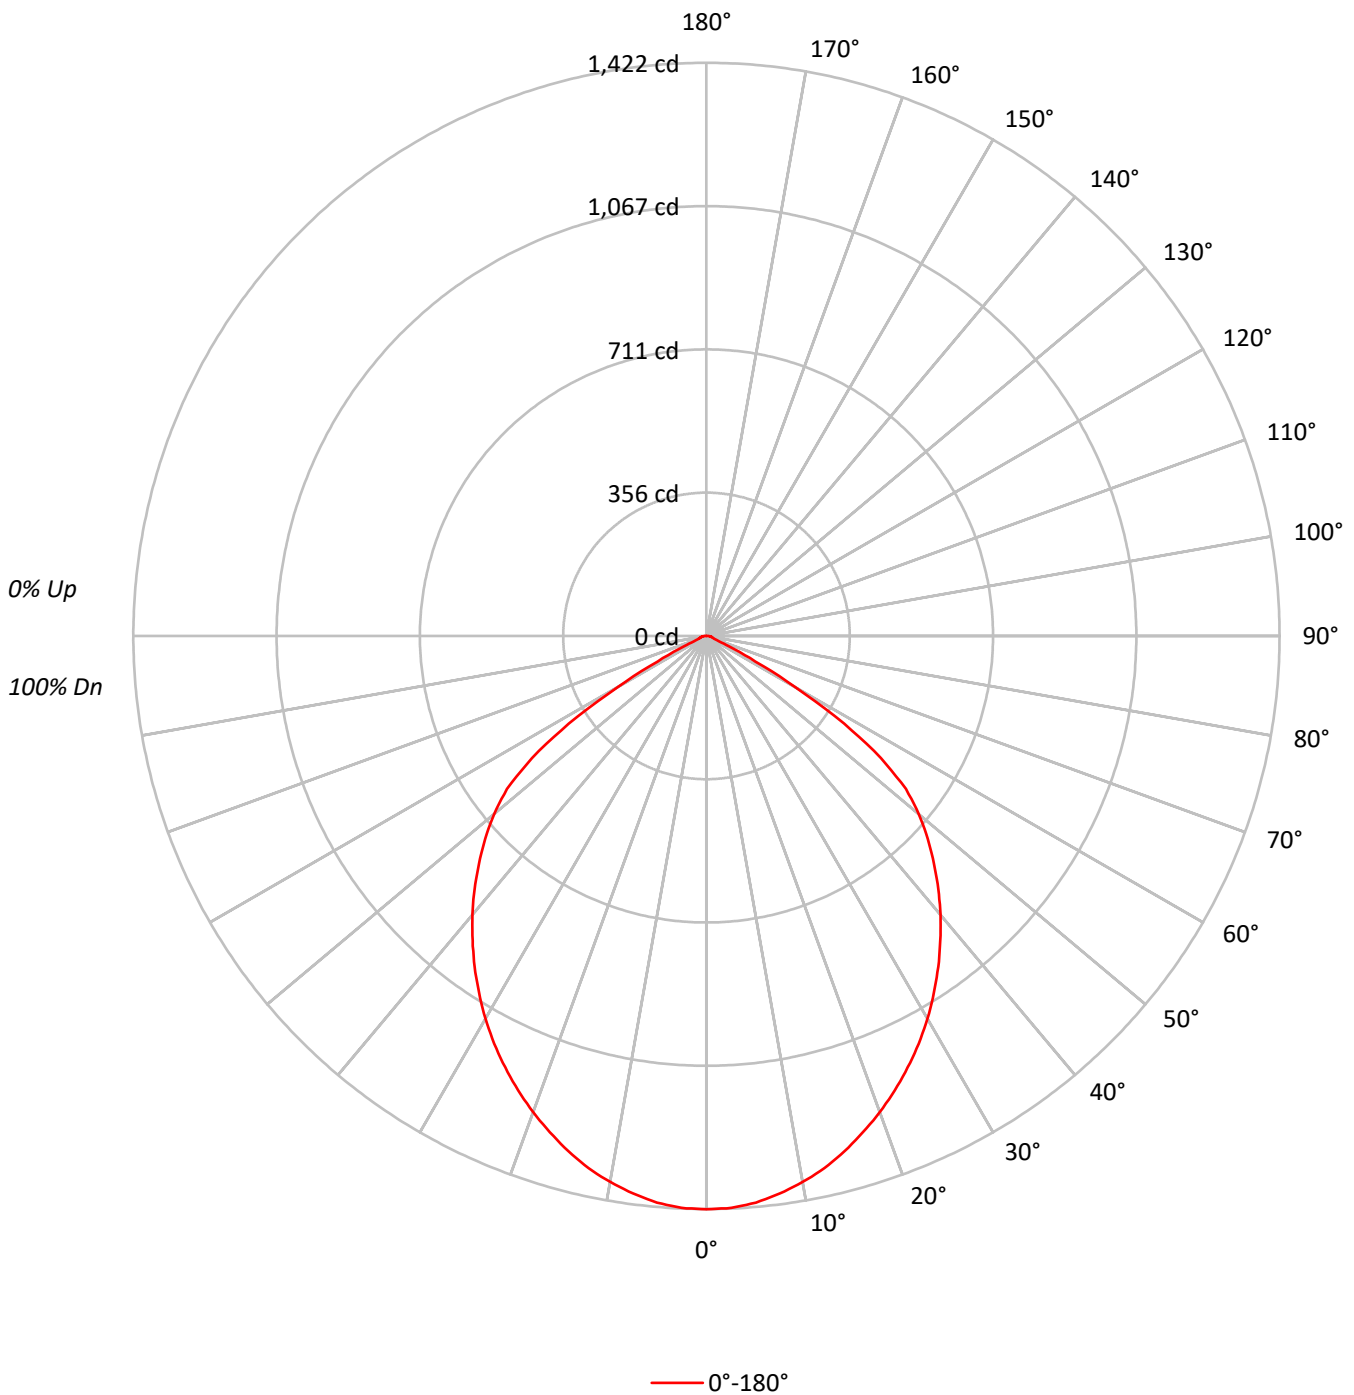



TEST NUMBER: P866241

CATALOG NUMBER: PRLX-2002-M-930-35L-L-U-S-X-X-BRSS-X

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	111	108	105	102	109	106	103	100	101	99	97	98	96	94	94	93	91	89
2	103	97	91	87	101	95	90	86	92	88	84	89	85	82	86	83	80	78
3	96	87	80	75	93	86	79	74	83	77	73	80	76	72	78	74	71	69
4	89	78	71	65	86	77	70	65	75	69	64	73	67	63	71	66	62	60
5	82	71	63	57	80	70	62	57	68	61	56	66	60	56	64	59	55	53
6	76	64	56	51	74	63	56	51	62	55	50	60	54	50	59	53	49	48
7	71	59	51	45	69	58	51	45	57	50	45	55	49	45	54	48	44	43
8	66	54	46	41	65	53	46	41	52	45	40	51	45	40	50	44	40	38
9	62	50	42	37	61	49	42	37	48	41	37	47	41	37	46	40	36	35
10	58	46	39	34	57	45	38	34	44	38	34	44	38	33	43	37	33	32

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	11316
5°	11270
10°	11114
15°	10903
20°	10647
25°	10370
30°	10074
35°	9737
40°	9378
45°	8976
50°	8514
55°	7333
60°	4043
65°	1139
70°	454
75°	486
80°	554
85°	675

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 8976 cd/sqm

TEST NUMBER: P866241

CATALOG NUMBER: PRLX-2002-M-930-35L-L-U-S-X-X-BRSS-X

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	133.5	4.7
10°-20°	372.7	13.1
20°-30°	543.9	19.0
30°-40°	626.7	21.9
40°-50°	615.3	21.5
50°-60°	451.2	15.8
60°-70°	88.4	3.1
70°-80°	16.7	0.6
80°-90°	7.4	0.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1050.2	36.8
0°-40°	1676.9	58.7
0°-60°	2743.4	96.1
0°-90°	2855.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2855.9	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1422	
5°	1411	134
15°	1324	373
25°	1181	544
35°	1003	627
45°	798	615
55°	529	451
65°	60	88
75°	16	17
85°	7	7
90°	0	

TEST NUMBER: P866241

CATALOG NUMBER: PRLX-2002-M-930-35L-L-U-S-X-X-BRSS-X

CANDELA DISTRIBUTION (FULL):

0°	
0°	1422.4
2.5°	1420.5
5°	1411.2
7.5°	1395.4
10°	1375.8
12.5°	1352.6
15°	1323.7
17.5°	1291.1
20°	1257.6
22.5°	1220.4
25°	1181.3
27.5°	1140.3
30°	1096.6
32.5°	1050.0
35°	1002.6
37.5°	953.2
40°	903.0
42.5°	851.8
45°	797.8
47.5°	744.7
50°	687.9
52.5°	623.7
55°	528.7
57.5°	404.9
60°	254.1
62.5°	136.8
65°	60.5
67.5°	27.9
70°	19.5
72.5°	17.7
75°	15.8
77.5°	14.0
80°	12.1
82.5°	10.2
85°	7.4
87.5°	3.7
90°	0.0



TEST NUMBER: P866241
 CATALOG NUMBER: PRLX-2002-M-930-35L-L-U-S-X-X-BRSS-X

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	17.97	19.40	18.34	19.72	20.03	17.97	19.40	18.34	19.72	20.03
	3H	17.88	19.14	18.26	19.47	19.83	17.88	19.14	18.26	19.47	19.83
	4H	17.83	19.00	18.23	19.35	19.73	17.83	19.00	18.23	19.35	19.73
	6H	17.77	18.85	18.19	19.21	19.61	17.77	18.85	18.19	19.21	19.61
	8H	17.74	18.76	18.17	19.15	19.55	17.74	18.76	18.17	19.15	19.55
	12H	17.71	18.69	18.15	19.07	19.50	17.71	18.69	18.15	19.07	19.50
4H	2H	17.84	19.01	18.24	19.36	19.74	17.84	19.01	18.24	19.36	19.74
	3H	17.75	18.70	18.16	19.10	19.50	17.75	18.70	18.16	19.10	19.50
	4H	17.69	18.53	18.13	18.95	19.39	17.69	18.53	18.13	18.95	19.39
	6H	17.65	18.37	18.11	18.82	19.28	17.65	18.37	18.11	18.82	19.28
	8H	17.61	18.29	18.08	18.74	19.21	17.61	18.29	18.08	18.74	19.21
	12H	17.59	18.19	18.07	18.67	19.14	17.59	18.19	18.07	18.67	19.14
8H	4H	17.58	18.25	18.05	18.70	19.17	17.58	18.25	18.05	18.70	19.17
	6H	17.52	18.08	18.02	18.57	19.05	17.52	18.08	18.02	18.57	19.05
	8H	17.48	17.99	18.00	18.50	19.00	17.48	17.99	18.00	18.50	19.00
	12H	17.47	17.92	17.98	18.42	18.99	17.47	17.92	17.98	18.42	18.99
12H	4H	17.54	18.14	18.02	18.62	19.09	17.54	18.14	18.02	18.62	19.09
	6H	17.46	17.97	17.98	18.48	18.97	17.46	17.97	17.98	18.48	18.97
	8H	17.45	17.90	17.96	18.40	18.97	17.45	17.90	17.96	18.40	18.97