

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: PrentaLux

Report Number: P866294

Luminaire Tested: PRLX-2002-M-935-25L-G-U-S-X-X-GREY-X

Issue Date: 8/20/2024

Test Information

Test Method: LM-79-2019
Report Number: P866294
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2304-993-40)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 8/20/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: Prenalux
Catalog Number: PRLX-2002-M-935-25L-G-U-S-X-X-GREY-X
Description: PRENATALUX 3D PRINTED PENDANT LED LUMINAIRE, MEDIUM LIGHT ENGINE, GLOBE LENS, TRUNCATED DOME WITH GRAY INTERIOR SHADE.
LIGHT LEVEL 3
Light Source: 3500K CCT, 90 CRI LEDS
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 955.9 lumens
Efficiency: N/A
Efficacy: 44.0 lumens/watt
Spacing Criteria (0/90/45): 1.36 / 1.36 / 1.53
Luminous Opening: Circular (Dia: 1.31' x H: 0')
CIE Type: Direct

Input Watts (W): 21.7
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: 0.5 HR
Operation Time: 3 HR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P866294

CATALOG NUMBER: PRLX-2002-M-935-25L-G-U-S-X-X-GREY-X

Luminous Intensity Polar Plot

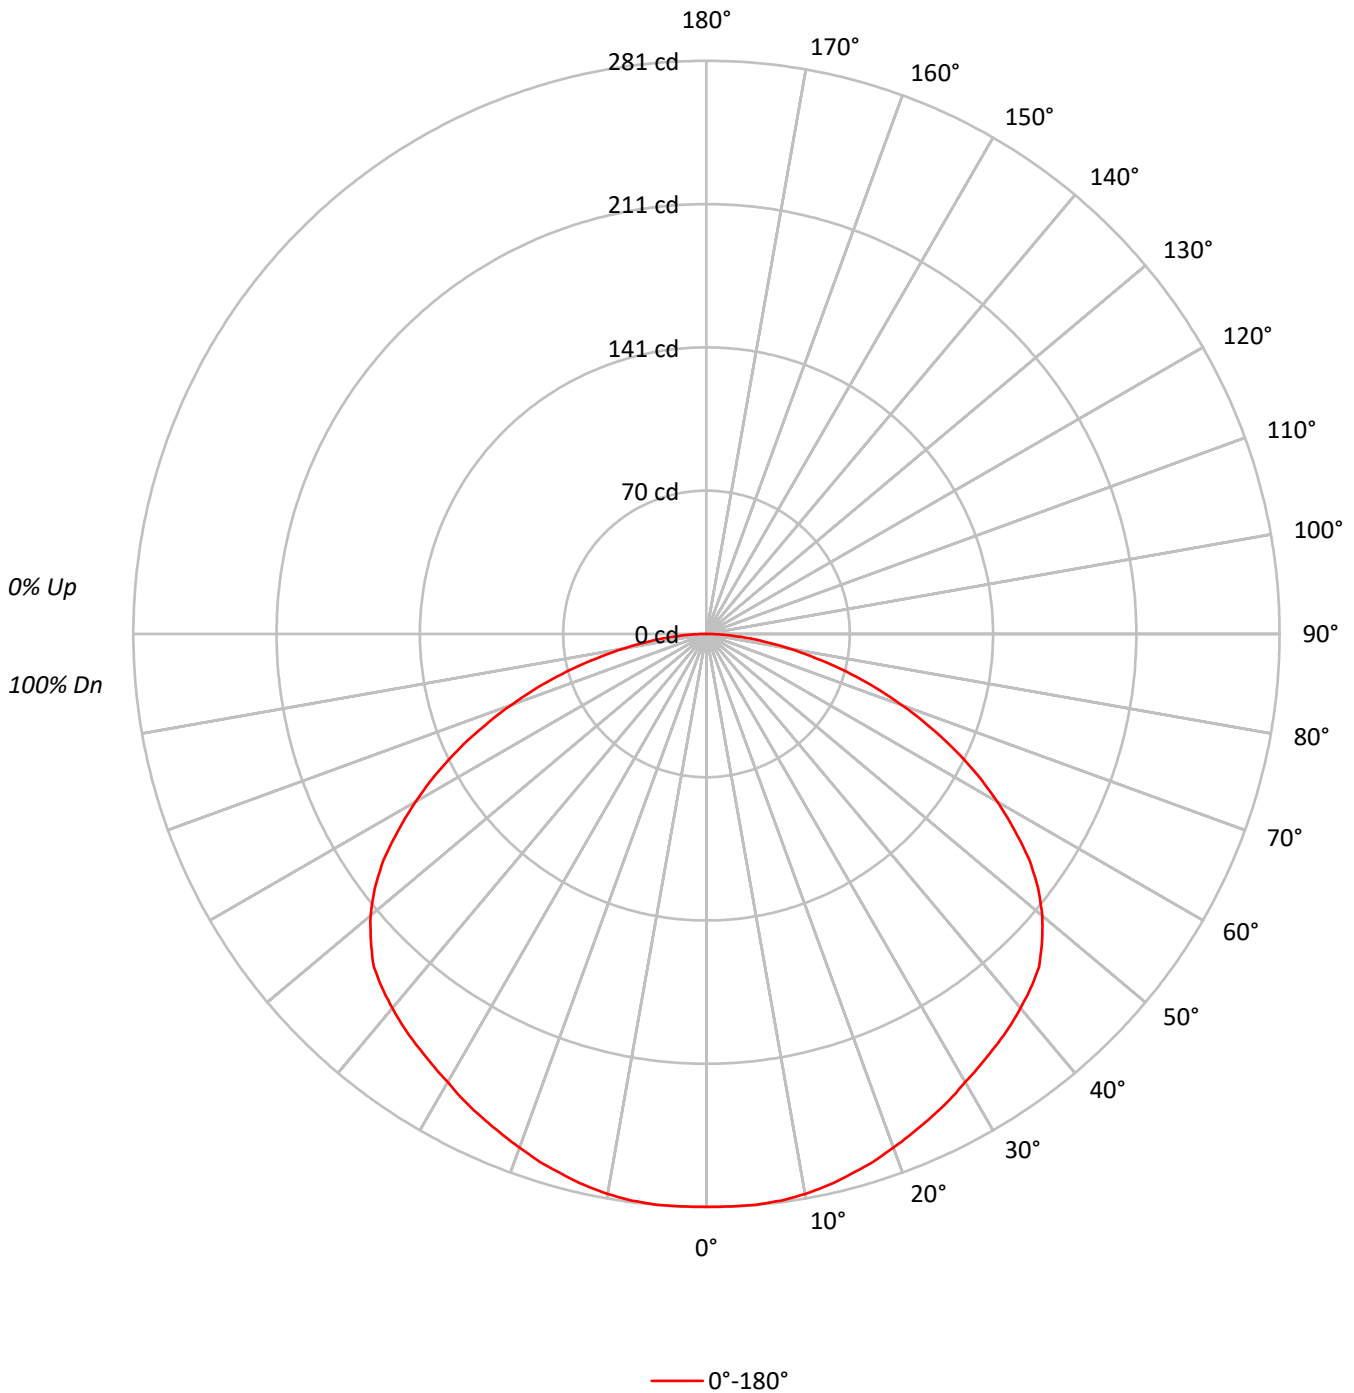



TEST NUMBER: P866294

CATALOG NUMBER: PRLX-2002-M-935-25L-G-U-S-X-X-GREY-X

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	108	103	99	95	105	101	97	93	97	93	90		93	90	87		89	87	85	83
2	98	89	82	76	95	87	81	75	84	78	73		80	76	72		77	73	70	68
3	89	78	69	62	86	76	68	62	73	66	61		70	64	59		68	63	58	56
4	81	68	59	52	78	67	58	52	64	57	51		62	55	50		60	54	49	47
5	74	61	51	44	72	59	51	44	57	49	44		55	48	43		53	47	43	40
6	68	54	45	38	66	53	44	38	51	44	38		50	43	37		48	42	37	35
7	63	49	40	33	61	48	39	33	47	39	33		45	38	33		44	37	33	31
8	58	44	36	30	57	44	35	30	42	35	29		41	34	29		40	34	29	27
9	55	41	32	26	53	40	32	26	39	31	26		38	31	26		37	31	26	24
10	51	37	29	24	50	37	29	24	36	29	24		35	28	24		34	28	23	22

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	2235
5°	2243
10°	2252
15°	2258
20°	2269
25°	2293
30°	2331
35°	2398
40°	2487
45°	2596
50°	2661
55°	2681
60°	2622
65°	2528
70°	2368
75°	2170
80°	1897
85°	1552

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 55°
 Luminance: 2681 cd/sqm

TEST NUMBER: P866294

CATALOG NUMBER: PRLX-2002-M-935-25L-G-U-S-X-X-GREY-X

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	26.7	2.8
10°-20°	77.5	8.1
20°-30°	120.7	12.6
30°-40°	154.9	16.2
40°-50°	177.2	18.5
50°-60°	171.6	18.0
60°-70°	132.5	13.9
70°-80°	74.7	7.8
80°-90°	20.0	2.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	224.9	23.5
0°-40°	379.8	39.7
0°-60°	728.6	76.2
0°-90°	955.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	955.9	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	281	
5°	281	27
15°	274	77
25°	261	121
35°	247	155
45°	231	177
55°	193	172
65°	134	132
75°	71	75
85°	17	20
90°	0	

TEST NUMBER: P866294

CATALOG NUMBER: PRLX-2002-M-935-25L-G-U-S-X-X-GREY-X

CANDELA DISTRIBUTION (FULL):

	0°
0°	280.9
2.5°	280.9
5°	280.9
7.5°	280.2
10°	278.8
12.5°	276.8
15°	274.1
17.5°	271.4
20°	268.0
22.5°	264.6
25°	261.2
27.5°	257.8
30°	253.7
32.5°	250.3
35°	246.9
37.5°	243.5
40°	239.5
42.5°	235.4
45°	230.7
47.5°	223.2
50°	215.0
52.5°	204.9
55°	193.3
57.5°	179.1
60°	164.8
62.5°	149.9
65°	134.3
67.5°	118.0
70°	101.8
72.5°	86.2
75°	70.6
77.5°	54.9
80°	41.4
82.5°	28.5
85°	17.0
87.5°	7.5
90°	0.0



TEST NUMBER: P866294
 CATALOG NUMBER: PRLX-2002-M-935-25L-G-U-S-X-X-GREY-X

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	15.91	17.62	16.28	17.93	18.24	15.91	17.62	16.28	17.93	18.24
	3H	17.73	19.28	18.11	19.60	19.96	17.73	19.28	18.11	19.60	19.96
	4H	18.39	19.85	18.79	20.20	20.57	18.39	19.85	18.79	20.20	20.57
	6H	18.86	20.21	19.27	20.58	20.96	18.86	20.21	19.27	20.58	20.96
	8H	19.00	20.30	19.43	20.69	21.08	19.00	20.30	19.43	20.69	21.08
	12H	19.10	20.34	19.53	20.72	21.15	19.10	20.34	19.53	20.72	21.15
4H	2H	16.57	18.03	16.97	18.38	18.75	16.57	18.03	16.97	18.38	18.75
	3H	18.60	19.83	19.01	20.22	20.62	18.60	19.83	19.01	20.22	20.62
	4H	19.39	20.50	19.82	20.91	21.35	19.39	20.50	19.82	20.91	21.35
	6H	19.98	20.95	20.43	21.39	21.84	19.98	20.95	20.43	21.39	21.84
	8H	20.17	21.08	20.63	21.52	21.98	20.17	21.08	20.63	21.52	21.98
	12H	20.30	21.13	20.78	21.60	22.07	20.30	21.13	20.78	21.60	22.07
8H	4H	19.70	20.61	20.16	21.05	21.52	19.70	20.61	20.16	21.05	21.52
	6H	20.40	21.16	20.89	21.65	22.12	20.40	21.16	20.89	21.65	22.12
	8H	20.66	21.35	21.17	21.85	22.33	20.66	21.35	21.17	21.85	22.33
	12H	20.87	21.47	21.37	21.96	22.52	20.87	21.47	21.37	21.96	22.52
12H	4H	19.74	20.56	20.21	21.03	21.50	19.74	20.56	20.21	21.03	21.50
	6H	20.46	21.14	20.96	21.65	22.13	20.46	21.14	20.96	21.65	22.13
	8H	20.77	21.38	21.28	21.87	22.42	20.77	21.38	21.28	21.87	22.42