

Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: PrentaLux

Report Number: P865579

Luminaire Tested: PRLX-2002-S-927-05L-L-U-S-X-X-WHHR-X

Issue Date: 8/20/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P865579  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2304-993-19)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 8/20/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: Prenalux  
Catalog Number: PRLX-2002-S-927-05L-L-U-S-X-X-WHHR-X  
Description: PRENTALUX 3D PRINTED PENDANT LED LUMINAIRE, SMALL LIGHT ENGINE, FLAT LENS, TRUNCATED DOME WITH WHITE INTERIOR SHADE.  
LIGHT LEVEL 1  
Light Source: 2700K CCT, 90 CRI LEDS  
Ballast/Driver: -


**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 441.1 lumens  
Efficiency: N/A  
Efficacy: 71.1 lumens/watt  
Spacing Criteria (0/90/45): 1.2 / 1.2 / 1.31  
Luminous Opening: Circular (Dia: 0.85' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 6.2  
Input Voltage (V): 120  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: 0.333 HR  
Operation Time: 3 HR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P865579

CATALOG NUMBER: PRLX-2002-S-927-05L-L-U-S-X-X-WHHR-X

### Luminous Intensity Polar Plot

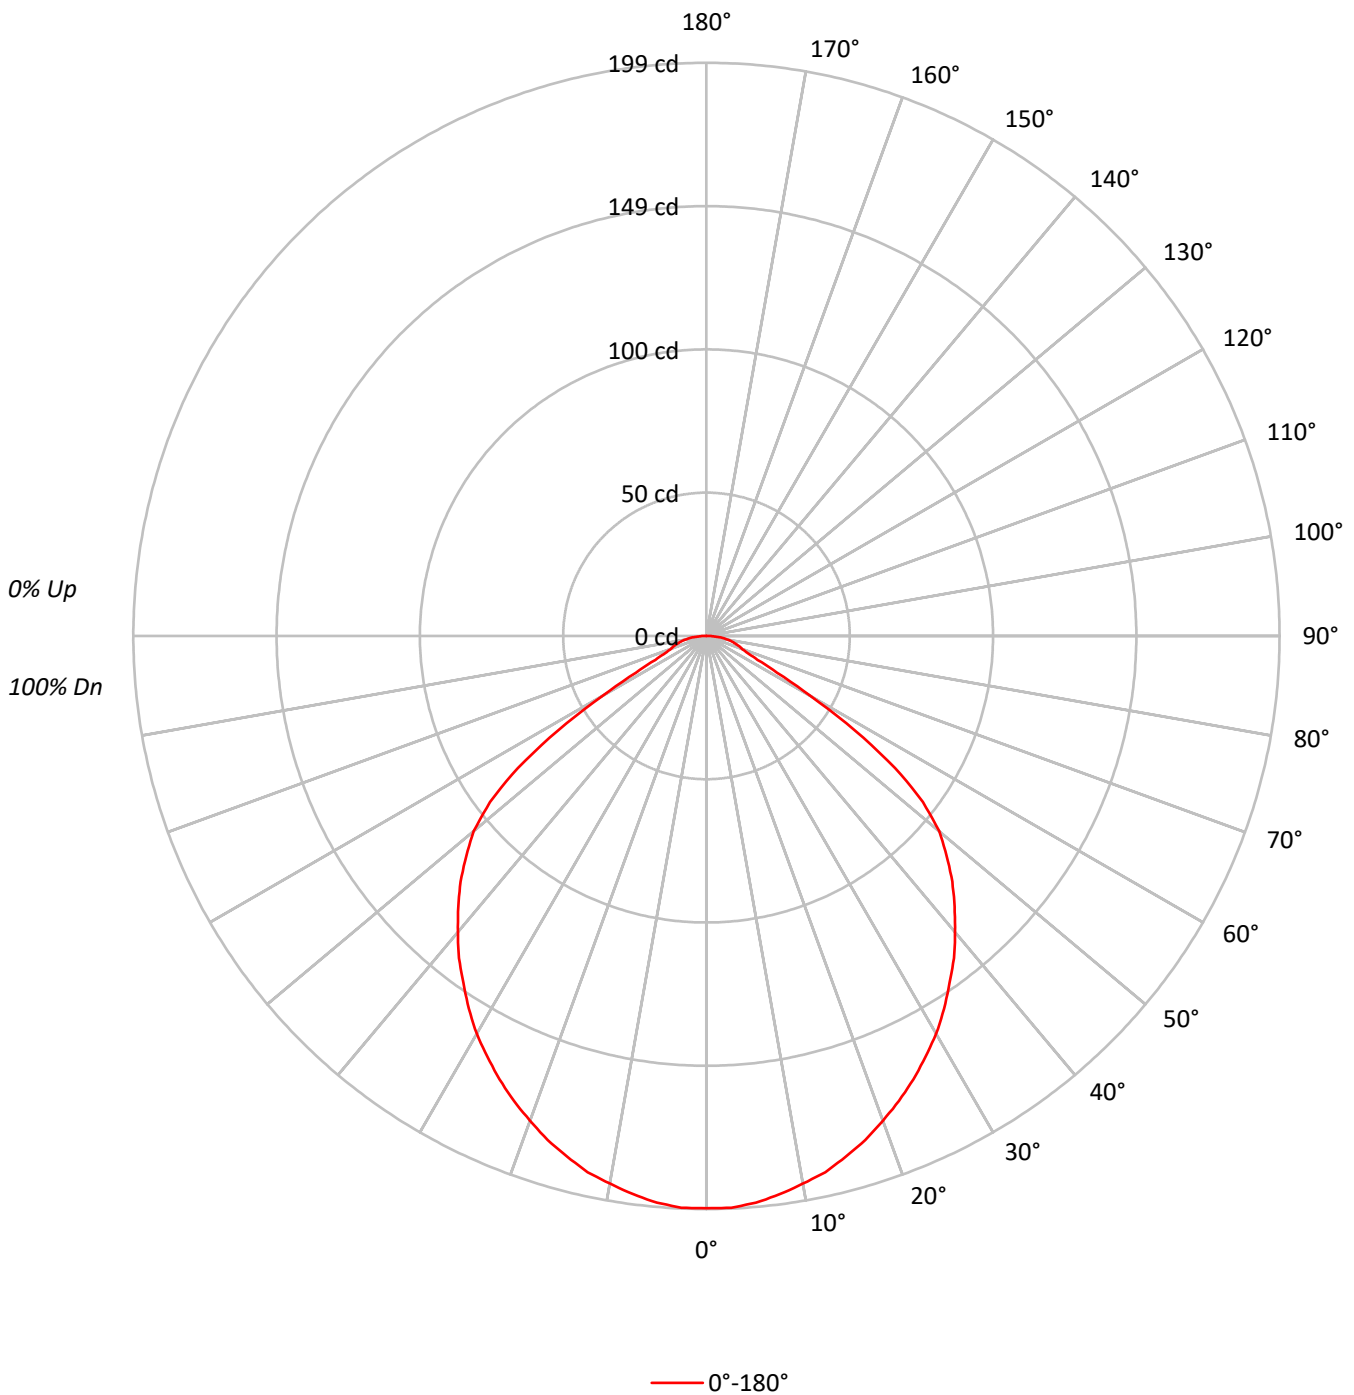



TEST NUMBER: P865579

CATALOG NUMBER: PRLX-2002-S-927-05L-L-U-S-X-X-WHHR-X

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	111	107	103	100	108	104	101	98	100	98	95	96	94	92	93	91	90	88
2	102	95	89	84	100	93	88	83	90	85	81	87	83	80	84	81	78	76
3	94	85	78	72	92	83	77	71	80	75	70	78	73	69	75	71	68	66
4	87	76	68	62	85	75	68	62	72	66	61	70	65	60	68	63	60	58
5	80	69	60	54	78	68	60	54	66	59	54	64	58	53	62	57	53	51
6	74	62	54	48	73	61	54	48	60	53	47	58	52	47	56	51	47	45
7	69	57	49	43	68	56	48	43	54	47	42	53	47	42	52	46	42	40
8	65	52	44	38	63	51	44	38	50	43	38	49	42	38	48	42	38	36
9	60	48	40	35	59	47	40	35	46	39	34	45	39	34	44	38	34	32
10	57	44	37	32	55	44	36	32	43	36	31	42	36	31	41	35	31	30

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	3732
5°	3724
10°	3683
15°	3639
20°	3580
25°	3521
30°	3460
35°	3373
40°	3293
45°	3206
50°	3083
55°	2620
60°	1563
65°	871
70°	725
75°	755
80°	822
85°	862

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 3206 cd/sqm

TEST NUMBER: P865579

CATALOG NUMBER: PRLX-2002-S-927-05L-L-U-S-X-X-WHHR-X

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	18.7	4.2
10°-20°	52.8	12.0
20°-30°	78.3	17.7
30°-40°	92.1	20.9
40°-50°	92.9	21.1
50°-60°	68.8	15.6
60°-70°	22.1	5.0
70°-80°	11.1	2.5
80°-90°	4.3	1.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	149.7	33.9
0°-40°	241.9	54.8
0°-60°	403.6	91.5
0°-90°	441.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	441.1	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	199	
5°	198	19
15°	187	53
25°	170	78
35°	147	92
45°	121	93
55°	80	69
65°	20	22
75°	10	11
85°	4	4
90°	0	

TEST NUMBER: P865579

CATALOG NUMBER: PRLX-2002-S-927-05L-L-U-S-X-X-WHHR-X

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	198.7
2.5°	198.7
5°	197.5
7.5°	195.5
10°	193.1
12.5°	190.7
15°	187.1
17.5°	183.5
20°	179.1
22.5°	174.7
25°	169.9
27.5°	164.7
30°	159.5
32.5°	153.5
35°	147.1
37.5°	141.1
40°	134.3
42.5°	127.5
45°	120.7
47.5°	113.1
50°	105.5
52.5°	94.7
55°	80.0
57.5°	61.2
60°	41.6
62.5°	27.6
65°	19.6
67.5°	15.2
70°	13.2
72.5°	12.0
75°	10.4
77.5°	9.2
80°	7.6
82.5°	6.0
85°	4.0
87.5°	2.0
90°	0.0



TEST NUMBER: P865579  
 CATALOG NUMBER: PRLX-2002-S-927-05L-L-U-S-X-X-WHHR-X

**CIE UGR TABLE:**

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	14.27	15.76	14.64	16.07	16.39	14.27	15.76	14.64	16.07	16.39
	3H	14.51	15.84	14.89	16.16	16.53	14.51	15.84	14.89	16.16	16.53
	4H	14.67	15.91	15.08	16.26	16.64	14.67	15.91	15.08	16.26	16.64
	6H	14.87	16.00	15.28	16.37	16.76	14.87	16.00	15.28	16.37	16.76
	8H	14.95	16.04	15.38	16.43	16.83	14.95	16.04	15.38	16.43	16.83
	12H	15.02	16.06	15.45	16.44	16.87	15.02	16.06	15.45	16.44	16.87
4H	2H	14.27	15.50	14.67	15.85	16.23	14.27	15.50	14.67	15.85	16.23
	3H	14.65	15.66	15.06	16.06	16.46	14.65	15.66	15.06	16.06	16.46
	4H	14.91	15.82	15.34	16.23	16.67	14.91	15.82	15.34	16.23	16.67
	6H	15.24	16.02	15.70	16.47	16.93	15.24	16.02	15.70	16.47	16.93
	8H	15.39	16.12	15.85	16.56	17.03	15.39	16.12	15.85	16.56	17.03
	12H	15.51	16.17	16.00	16.65	17.12	15.51	16.17	16.00	16.65	17.12
8H	4H	14.98	15.71	15.45	16.16	16.63	14.98	15.71	15.45	16.16	16.63
	6H	15.41	16.02	15.91	16.52	16.99	15.41	16.02	15.91	16.52	16.99
	8H	15.63	16.19	16.15	16.70	17.19	15.63	16.19	16.15	16.70	17.19
	12H	15.85	16.34	16.36	16.83	17.40	15.85	16.34	16.36	16.83	17.40
12H	4H	14.98	15.64	15.46	16.12	16.59	14.98	15.64	15.46	16.12	16.59
	6H	15.43	15.98	15.95	16.50	16.98	15.43	15.98	15.95	16.50	16.98
	8H	15.71	16.20	16.22	16.70	17.26	15.71	16.20	16.22	16.70	17.26