

Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: PrentaLux

Report Number: P865609

Luminaire Tested: PRLX-2002-S-927-25L-L-U-S-X-X-BRSS-X

Issue Date: 8/20/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P865609  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2304-993-20)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 8/20/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: Prenalux  
Catalog Number: PRLX-2002-S-927-25L-L-U-S-X-X-BRSS-X  
Description: PRENTALUX 3D PRINTED PENDANT LED LUMINAIRE, SMALL LIGHT ENGINE, FLAT LENS, TRUNCATED DOME WITH BRASS INTERIOR SHADE.  
LIGHT LEVEL 5  
Light Source: 2700K CCT, 90 CRI LEDS  
Ballast/Driver: -


**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 1812.0 lumens  
Efficiency: N/A  
Efficacy: 62.3 lumens/watt  
Spacing Criteria (0/90/45): 1.16 / 1.16 / 1.27  
Luminous Opening: Circular (Dia: 0.85' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 29.1  
Input Voltage (V): 120  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: 0.333 HR  
Operation Time: 3 HR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P865609

CATALOG NUMBER: PRLX-2002-S-927-25L-L-U-S-X-X-BRSS-X

### Luminous Intensity Polar Plot

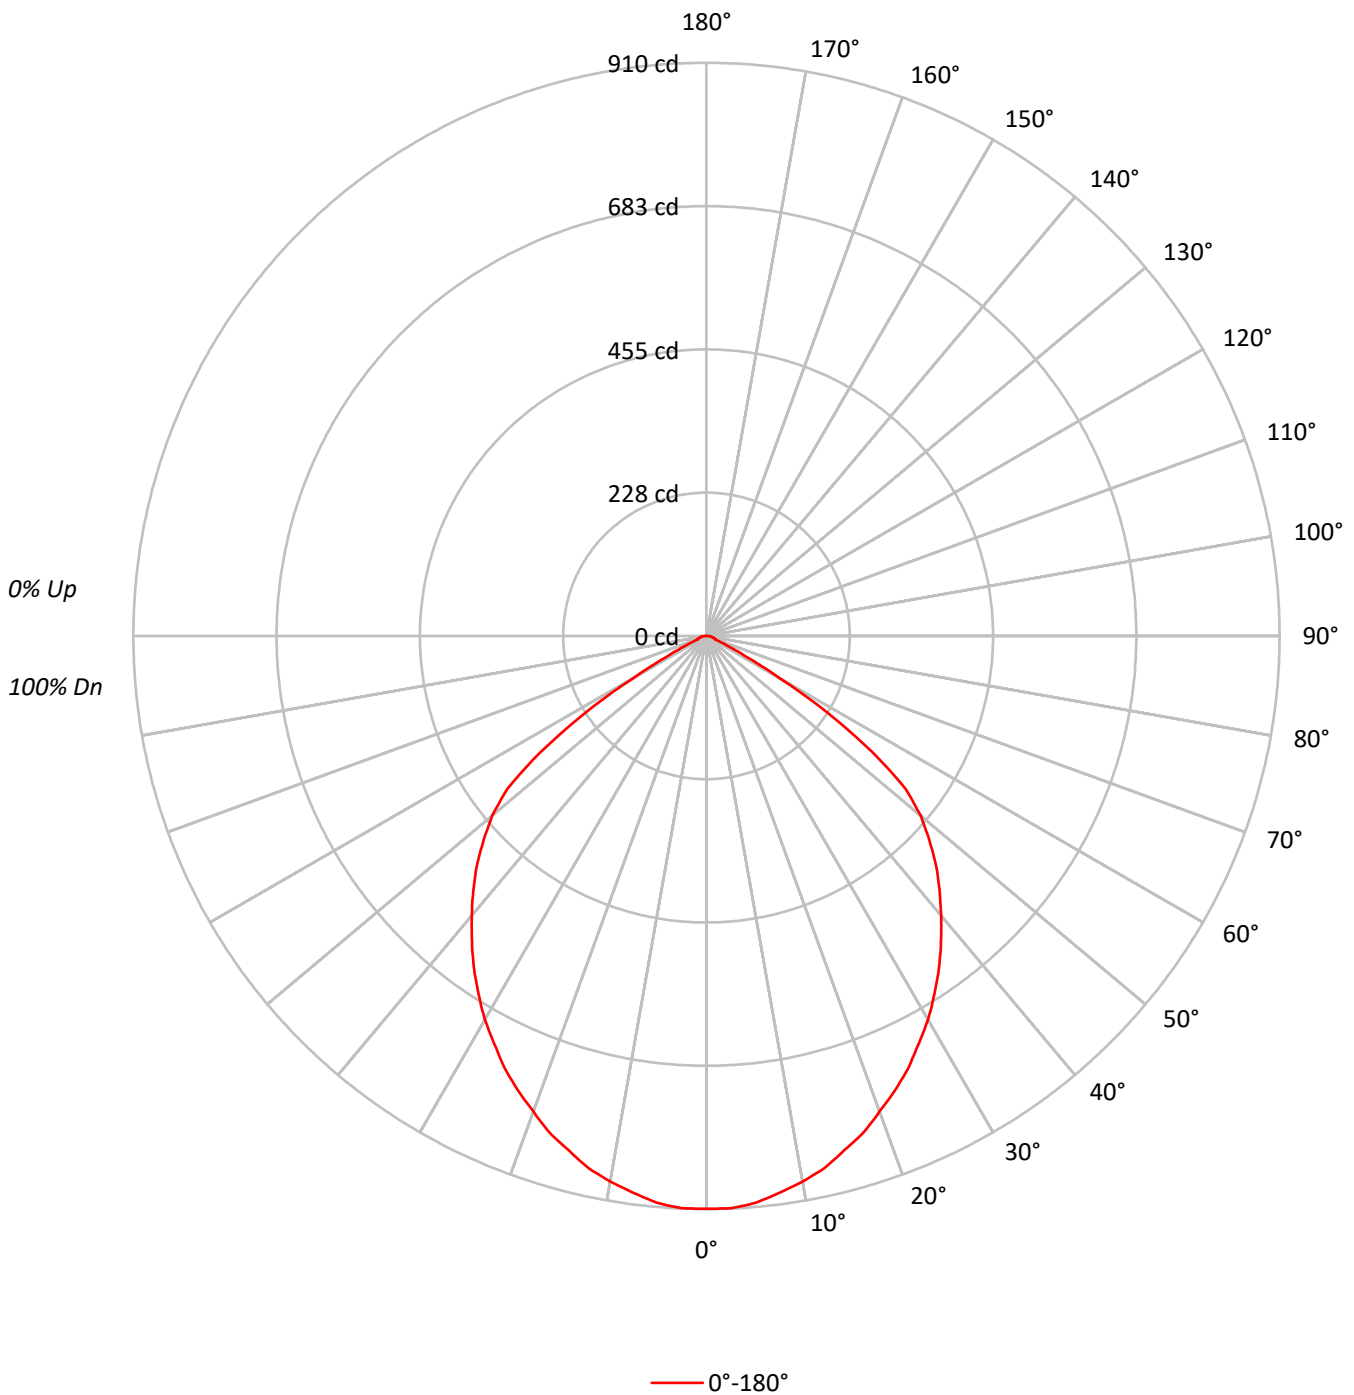



TEST NUMBER: P865609

CATALOG NUMBER: PRLX-2002-S-927-25L-L-U-S-X-X-BRSS-X

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	111	108	105	102	109	106	103	100	102	99	97	98	96	94	94	93	91	89
2	104	97	92	87	101	95	90	86	92	88	84	89	85	82	86	83	80	79
3	96	87	81	75	94	86	80	75	83	78	73	80	76	72	78	74	71	69
4	89	79	71	66	87	77	70	65	75	69	64	73	68	63	71	66	63	61
5	82	71	63	58	80	70	63	57	68	62	57	66	61	56	64	60	56	54
6	76	65	57	51	75	64	56	51	62	55	50	60	55	50	59	54	50	48
7	71	59	51	46	70	58	51	46	57	50	45	55	49	45	54	49	45	43
8	66	54	46	41	65	53	46	41	52	46	41	51	45	41	50	44	40	39
9	62	50	42	37	61	49	42	37	48	42	37	47	41	37	46	41	37	35
10	58	46	39	34	57	46	39	34	45	38	34	44	38	34	43	37	34	32

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	17084
5°	17036
10°	16776
15°	16442
20°	16064
25°	15702
30°	15261
35°	14759
40°	14215
45°	13700
50°	12969
55°	10539
60°	5030
65°	1600
70°	769
75°	871
80°	865
85°	1293

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 13700 cd/sqm

TEST NUMBER: P865609

CATALOG NUMBER: PRLX-2002-S-927-25L-L-U-S-X-X-BRSS-X

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	85.4	4.7
10°-20°	238.4	13.2
20°-30°	348.4	19.2
30°-40°	402.2	22.2
40°-50°	396.4	21.9
50°-60°	275.5	15.2
60°-70°	47.9	2.6
70°-80°	12.4	0.7
80°-90°	5.4	0.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	672.2	37.1
0°-40°	1074.4	59.3
0°-60°	1746.3	96.4
0°-90°	1812.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1812.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	910	
5°	904	85
15°	846	238
25°	758	348
35°	644	402
45°	516	396
55°	322	275
65°	36	48
75°	12	12
85°	6	5
90°	0	

TEST NUMBER: P865609

CATALOG NUMBER: PRLX-2002-S-927-25L-L-U-S-X-X-BRSS-X

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	909.5
2.5°	909.5
5°	903.5
7.5°	891.5
10°	879.5
12.5°	865.5
15°	845.5
17.5°	827.5
20°	803.6
22.5°	781.6
25°	757.6
27.5°	729.6
30°	703.6
32.5°	673.6
35°	643.6
37.5°	611.7
40°	579.7
42.5°	547.7
45°	515.7
47.5°	479.7
50°	443.8
52.5°	397.8
55°	321.8
57.5°	231.9
60°	133.9
62.5°	70.0
65°	36.0
67.5°	16.0
70°	14.0
72.5°	14.0
75°	12.0
77.5°	10.0
80°	8.0
82.5°	8.0
85°	6.0
87.5°	2.0
90°	0.0



TEST NUMBER: P865609

CATALOG NUMBER: PRLX-2002-S-927-25L-L-U-S-X-X-BRSS-X

**CIE UGR TABLE:**

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	18.65	20.07	19.02	20.38	20.70	18.65	20.07	19.02	20.38	20.70
	3H	18.56	19.81	18.94	20.14	20.50	18.56	19.81	18.94	20.14	20.50
	4H	18.52	19.68	18.92	20.03	20.41	18.52	19.68	18.92	20.03	20.41
	6H	18.47	19.54	18.88	19.91	20.30	18.47	19.54	18.88	19.91	20.30
	8H	18.45	19.46	18.88	19.85	20.25	18.45	19.46	18.88	19.85	20.25
	12H	18.43	19.39	18.86	19.78	20.21	18.43	19.39	18.86	19.78	20.21
4H	2H	18.51	19.67	18.91	20.02	20.41	18.51	19.67	18.91	20.02	20.41
	3H	18.44	19.38	18.85	19.78	20.18	18.44	19.38	18.85	19.78	20.18
	4H	18.40	19.23	18.83	19.65	20.09	18.40	19.23	18.83	19.65	20.09
	6H	18.36	19.08	18.82	19.53	19.99	18.36	19.08	18.82	19.53	19.99
	8H	18.34	19.01	18.81	19.46	19.93	18.34	19.01	18.81	19.46	19.93
	12H	18.33	18.93	18.82	19.41	19.88	18.33	18.93	18.82	19.41	19.88
8H	4H	18.29	18.96	18.75	19.41	19.88	18.29	18.96	18.75	19.41	19.88
	6H	18.25	18.80	18.75	19.30	19.78	18.25	18.80	18.75	19.30	19.78
	8H	18.23	18.74	18.75	19.25	19.74	18.23	18.74	18.75	19.25	19.74
	12H	18.25	18.70	18.76	19.19	19.76	18.25	18.70	18.76	19.19	19.76
12H	4H	18.25	18.84	18.73	19.33	19.80	18.25	18.84	18.73	19.33	19.80
	6H	18.19	18.70	18.71	19.21	19.70	18.19	18.70	18.71	19.21	19.70
	8H	18.20	18.66	18.72	19.15	19.72	18.20	18.66	18.72	19.15	19.72