

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: PrentaLux

Report Number: P865655

Luminaire Tested: PRLX-2002-S-935-05L-G-U-S-X-X-WHHR-X

Issue Date: 8/20/2024

Test Information

Test Method: LM-79-2019
Report Number: P865655
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2304-993-7)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 8/20/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PrentaLux
Catalog Number: PRLX-2002-S-935-05L-G-U-S-X-X-WHHR-X
Description: PRENTALUX 3D PRINTED PENDANT LED LUMINAIRE, SMALL LIGHT ENGINE, GLOBE LENS, TRUNCATED DOME WITH WHITE INTERIOR SHADE.
LIGHT LEVEL 1
Light Source: 3500K CCT, 90 CRI LEDS
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 298.7 lumens
Efficiency: N/A
Efficacy: 48.2 lumens/watt
Spacing Criteria (0/90/45): 1.34 / 1.34 / 1.49
Luminous Opening: Circular (Dia: 0.85' x H: 0')
CIE Type: Direct

Input Watts (W): 6.2
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: 0.333 HR
Operation Time: 3 HR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P865655

CATALOG NUMBER: PRLX-2002-S-935-05L-G-U-S-X-X-WHHR-X

Luminous Intensity Polar Plot

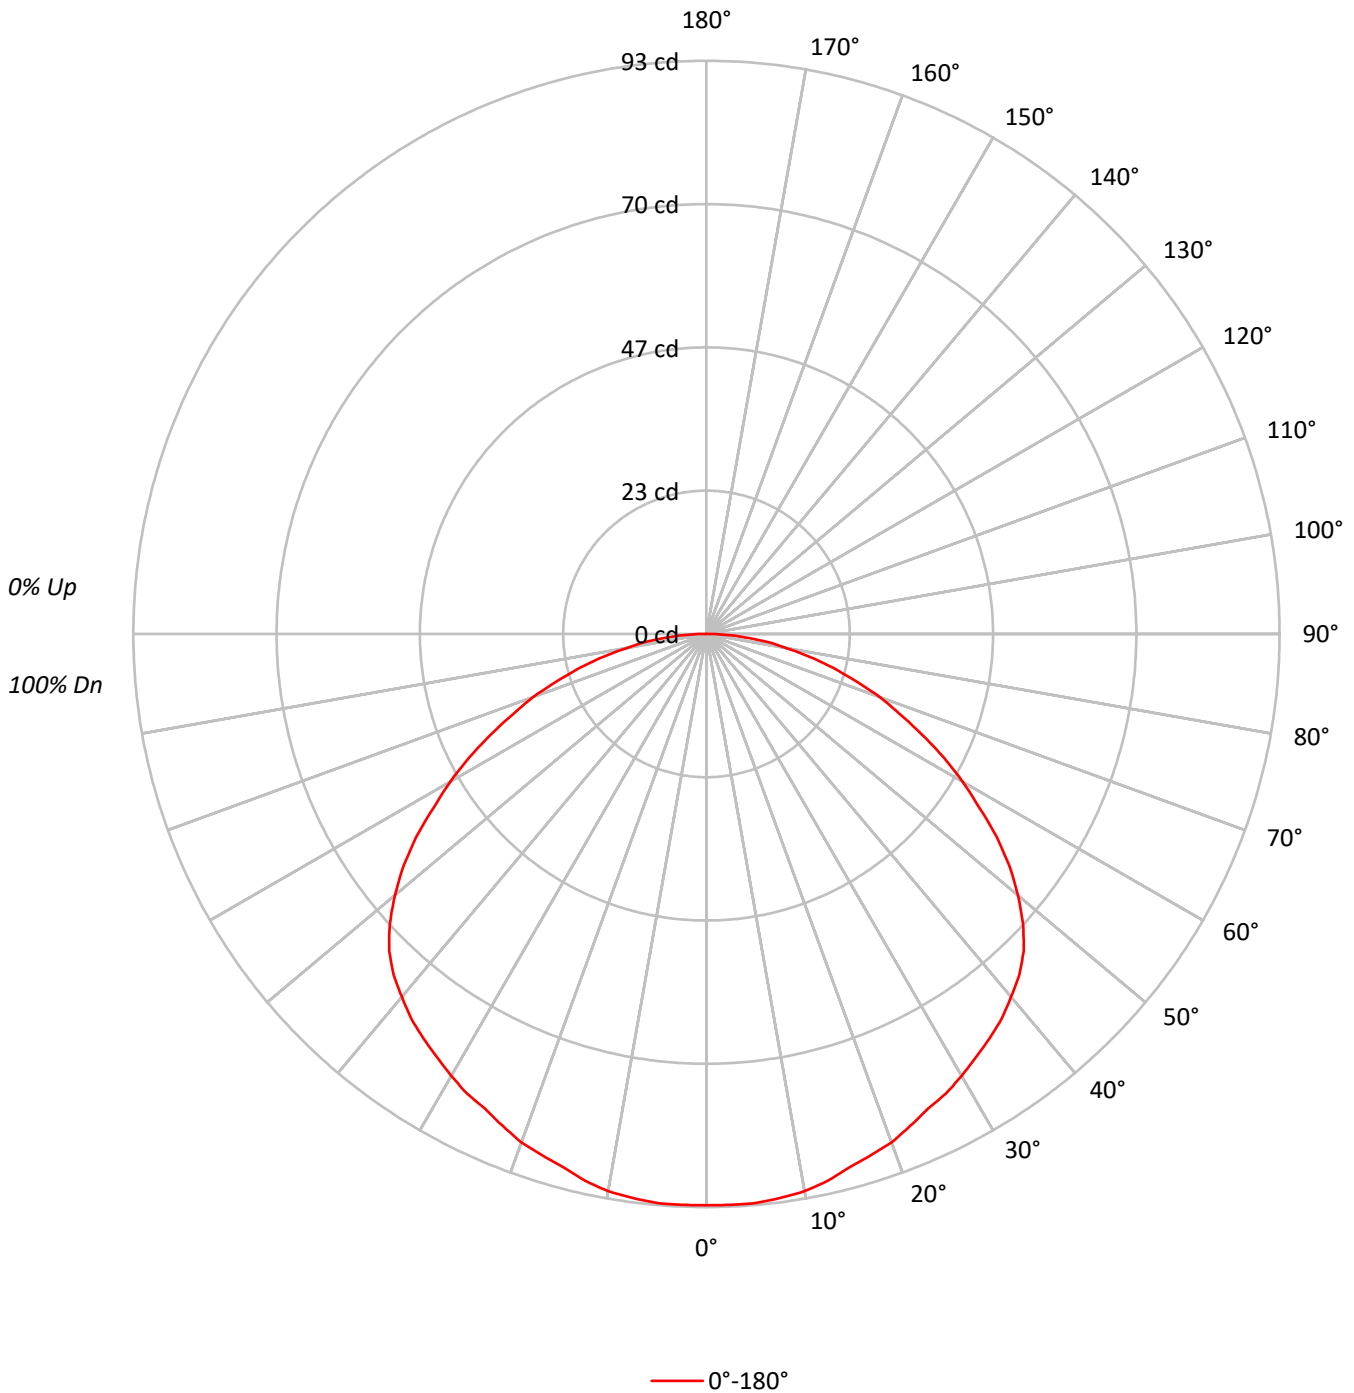

TEST NUMBER: P865655

CATALOG NUMBER: PRLX-2002-S-935-05L-G-U-S-X-X-WHHR-X

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	108	103	99	95	105	101	97	93	97	93	90	93	90	87	89	87	85	83
2	98	89	82	76	95	88	81	76	84	78	74	81	76	72	78	74	70	68
3	89	78	70	63	87	77	69	62	74	67	61	71	65	60	68	63	59	57
4	81	69	60	53	79	68	59	53	65	58	52	63	56	51	60	55	50	48
5	75	61	52	45	72	60	51	45	58	50	44	56	49	44	54	48	43	41
6	69	55	46	39	67	54	45	39	52	44	39	51	44	38	49	43	38	36
7	64	50	41	34	62	49	40	34	47	40	34	46	39	34	44	38	33	31
8	59	45	37	31	57	45	36	30	43	36	30	42	35	30	41	34	30	28
9	55	41	33	27	54	41	33	27	40	32	27	39	32	27	38	31	27	25
10	52	38	30	25	50	38	30	25	37	29	24	36	29	24	35	29	24	22

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	1741
5°	1748
10°	1751
15°	1742
20°	1755
25°	1762
30°	1796
35°	1837
40°	1886
45°	1934
50°	1929
55°	1883
60°	1803
65°	1711
70°	1642
75°	1546
80°	1417
85°	1358

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 47.5°
 Luminance: 1938 cd/sqm

TEST NUMBER: P865655

CATALOG NUMBER: PRLX-2002-S-935-05L-G-U-S-X-X-WHHR-X

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	8.8	3.0
10°-20°	25.4	8.5
20°-30°	39.4	13.2
30°-40°	50.2	16.8
40°-50°	55.8	18.7
50°-60°	51.2	17.1
60°-70°	38.3	12.8
70°-80°	22.5	7.5
80°-90°	7.1	2.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	73.6	24.6
0°-40°	123.8	41.4
0°-60°	230.8	77.3
0°-90°	298.7	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	298.7	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	93	
5°	93	9
15°	90	25
25°	85	39
35°	80	50
45°	73	56
55°	58	51
65°	38	38
75°	21	22
85°	6	7
90°	0	

TEST NUMBER: P865655

CATALOG NUMBER: PRLX-2002-S-935-05L-G-U-S-X-X-WHHR-X

CANDELA DISTRIBUTION (FULL):

	0°
0°	92.7
2.5°	92.7
5°	92.7
7.5°	92.3
10°	91.8
12.5°	90.9
15°	89.6
17.5°	88.7
20°	87.8
22.5°	86.4
25°	85.0
27.5°	84.1
30°	82.8
32.5°	81.4
35°	80.1
37.5°	78.7
40°	76.9
42.5°	75.1
45°	72.8
47.5°	69.7
50°	66.0
52.5°	62.0
55°	57.5
57.5°	52.5
60°	48.0
62.5°	43.4
65°	38.5
67.5°	33.9
70°	29.9
72.5°	25.3
75°	21.3
77.5°	17.2
80°	13.1
82.5°	10.0
85°	6.3
87.5°	3.2
90°	0.0



TEST NUMBER: P865655
 CATALOG NUMBER: PRLX-2002-S-935-05L-G-U-S-X-X-WHHR-X

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	14.44	16.12	14.80	16.43	16.75	14.44	16.12	14.80	16.43	16.75
	3H	16.22	17.74	16.60	18.07	18.43	16.22	17.74	16.60	18.07	18.43
	4H	16.91	18.35	17.31	18.70	19.07	16.91	18.35	17.31	18.70	19.07
	6H	17.45	18.78	17.86	19.15	19.54	17.45	18.78	17.86	19.15	19.54
	8H	17.65	18.92	18.07	19.31	19.71	17.65	18.92	18.07	19.31	19.71
	12H	17.79	19.02	18.22	19.40	19.83	17.79	19.02	18.22	19.40	19.83
4H	2H	15.06	16.50	15.46	16.85	17.22	15.06	16.50	15.46	16.85	17.22
	3H	17.08	18.29	17.49	18.69	19.08	17.08	18.29	17.49	18.69	19.08
	4H	17.91	19.01	18.34	19.42	19.85	17.91	19.01	18.34	19.42	19.85
	6H	18.58	19.54	19.03	19.98	20.44	18.58	19.54	19.03	19.98	20.44
	8H	18.84	19.74	19.30	20.18	20.64	18.84	19.74	19.30	20.18	20.64
	12H	19.04	19.85	19.52	20.33	20.79	19.04	19.85	19.52	20.33	20.79
8H	4H	18.25	19.15	18.70	19.59	20.05	18.25	19.15	18.70	19.59	20.05
	6H	19.05	19.80	19.54	20.29	20.76	19.05	19.80	19.54	20.29	20.76
	8H	19.39	20.07	19.90	20.57	21.06	19.39	20.07	19.90	20.57	21.06
	12H	19.69	20.29	20.19	20.77	21.33	19.69	20.29	20.19	20.77	21.33
12H	4H	18.29	19.10	18.77	19.57	20.04	18.29	19.10	18.77	19.57	20.04
	6H	19.12	19.80	19.63	20.30	20.79	19.12	19.80	19.63	20.30	20.79
	8H	19.53	20.13	20.04	20.62	21.18	19.53	20.13	20.04	20.62	21.18