

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: PrentaLux

Report Number: P867182

Luminaire Tested: PRLX-2004-L-927-117L-L-X-X-GREY-X

Issue Date: 8/20/2024

Test Information

Test Method: LM-79-2019
Report Number: P867182
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2304-993-86)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 8/20/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: Prenalux
Catalog Number: PRLX-2004-L-927-117L-L-X-X-GREY-X
Description: PRENTALUX 3D PRINTED PENDANT LED LUMINAIRE, LARGE LIGHT ENGINE, FLAT LENS,
BELL WITH GRAY INTERIOR SHADE.
LIGHT LEVEL 7
Light Source: 3000K CCT, 90 CRI LEDS
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 5528.5 lumens
Efficiency: N/A
Efficacy: 58.1 lumens/watt
Spacing Criteria (0/90/45): 1.02 / 1.02 / 0.98
Luminous Opening: Circular (Dia: 1.67' x H: 0')
CIE Type: Direct

Input Watts (W): 95.2
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: 0.333 HR
Operation Time: 3 HR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P867182

CATALOG NUMBER: PRLX-2004-L-927-117L-L-X-X-GREY-X

Luminous Intensity Polar Plot

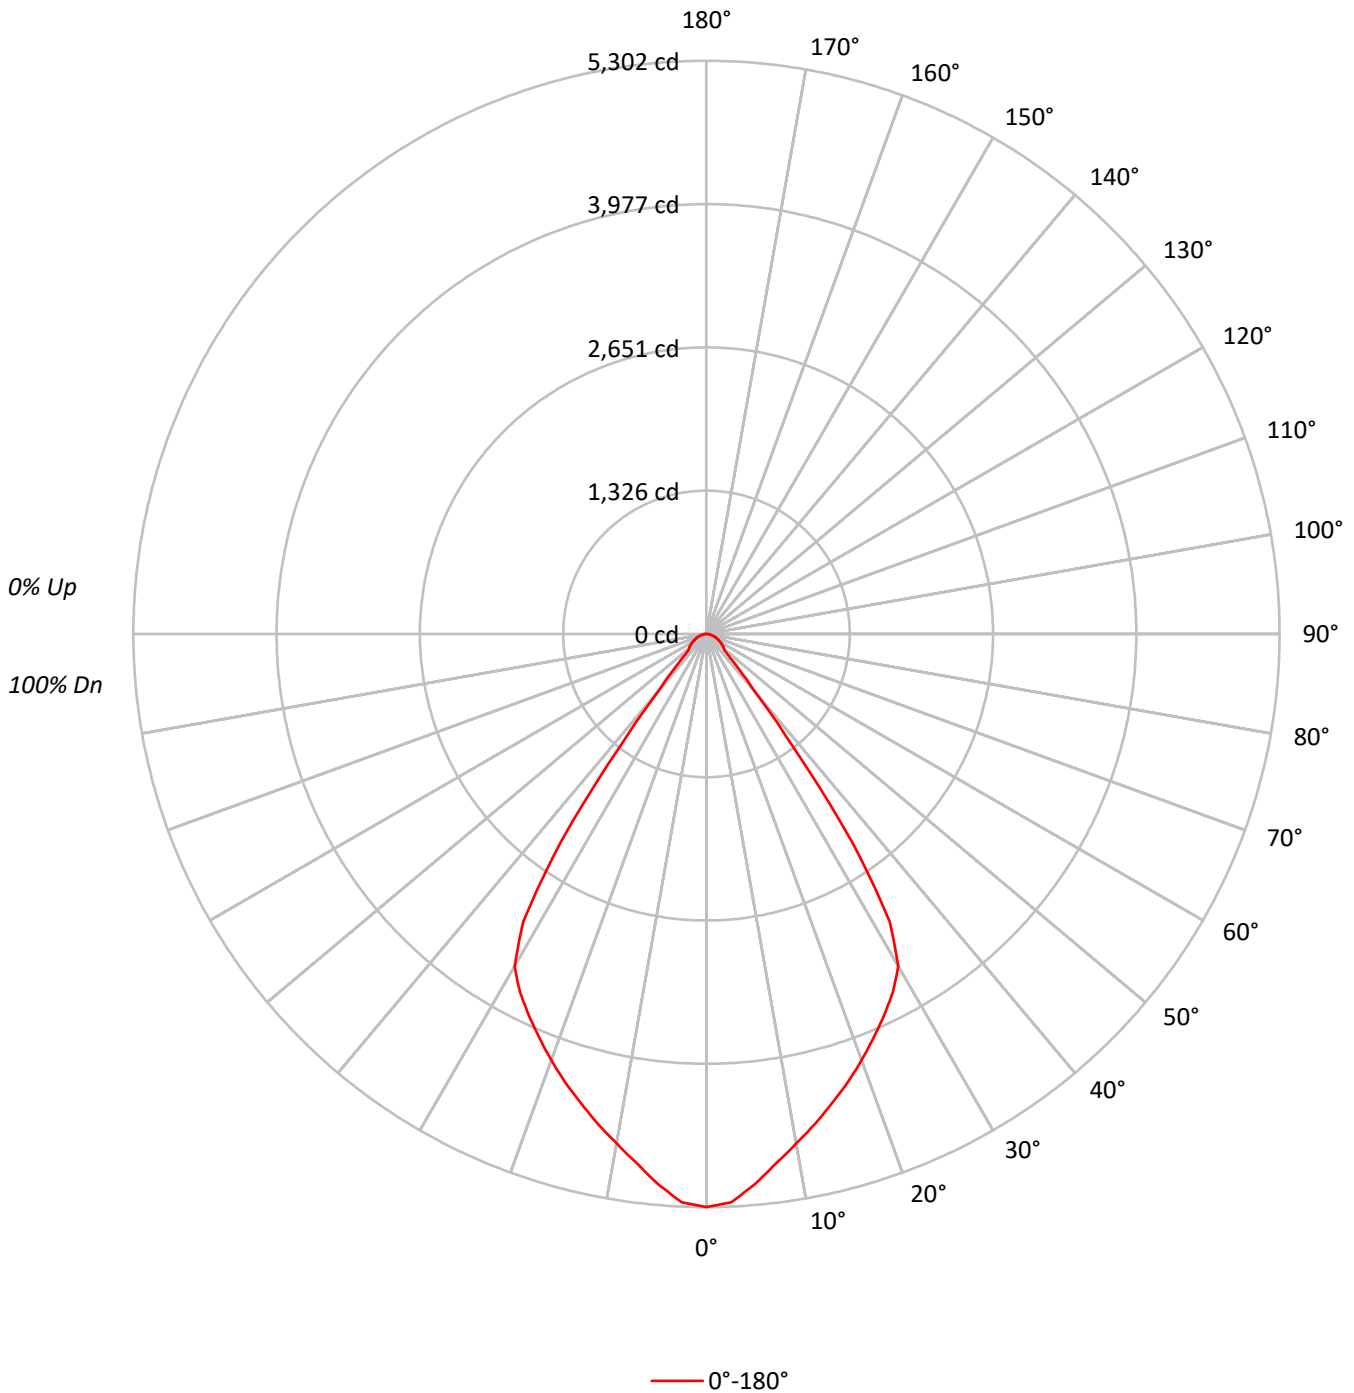



TEST NUMBER: P867182

CATALOG NUMBER: PRLX-2004-L-927-117L-L-X-X-GREY-X

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	113	110	107	104	110	108	105	103	103	101	100	100	98	97	96	95	94	92
2	107	101	97	93	104	99	95	92	96	93	90	93	90	88	90	88	86	84
3	101	94	88	84	99	92	87	83	89	85	82	87	83	80	85	82	79	77
4	95	87	81	76	93	86	80	76	83	79	75	81	77	74	79	76	73	71
5	90	81	74	70	88	80	74	69	78	73	69	76	72	68	75	71	68	66
6	85	75	69	64	83	74	68	64	73	68	64	71	67	63	70	66	63	61
7	80	70	64	59	79	70	64	59	68	63	59	67	62	59	66	62	58	57
8	76	66	60	55	75	65	59	55	64	59	55	63	58	55	62	58	54	53
9	72	62	56	51	71	62	55	51	61	55	51	60	55	51	59	54	51	49
10	69	58	52	48	68	58	52	48	57	52	48	56	51	48	56	51	48	46

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	26159
5°	25308
10°	23983
15°	22942
20°	22030
25°	21172
30°	20216
35°	14161
40°	4456
45°	2161
50°	1611
55°	1554
60°	1449
65°	1340
70°	1249
75°	1167
80°	1097
85°	1013

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 2161 cd/sqm

TEST NUMBER: P867182

CATALOG NUMBER: PRLX-2004-L-927-117L-L-X-X-GREY-X

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	477.3	8.6
10°-20°	1265.1	22.9
20°-30°	1789.4	32.4
30°-40°	1362.6	24.6
40°-50°	273.9	5.0
50°-60°	160.6	2.9
60°-70°	114.3	2.1
70°-80°	65.2	1.2
80°-90°	20.1	0.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	3531.8	63.9
0°-40°	4894.4	88.5
0°-60°	5329.0	96.4
0°-90°	5528.5	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	5528.5	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	5302	
5°	5110	477
15°	4492	1265
25°	3889	1789
35°	2351	1363
45°	310	274
55°	181	161
65°	115	114
75°	61	65
85°	18	20
90°	0	

TEST NUMBER: P867182

CATALOG NUMBER: PRLX-2004-L-927-117L-L-X-X-GREY-X

CANDELA DISTRIBUTION (FULL):

	0°
0°	5301.9
2.5°	5262.3
5°	5109.9
7.5°	4938.6
10°	4787.0
12.5°	4641.1
15°	4491.5
17.5°	4348.4
20°	4195.9
22.5°	4041.6
25°	3889.1
27.5°	3734.7
30°	3548.4
32.5°	3154.0
35°	2351.2
37.5°	1299.8
40°	691.8
42.5°	457.4
45°	309.7
47.5°	223.1
50°	209.9
52.5°	196.7
55°	180.7
57.5°	162.8
60°	146.8
62.5°	129.9
65°	114.8
67.5°	100.7
70°	86.6
72.5°	73.4
75°	61.2
77.5°	49.9
80°	38.6
82.5°	28.2
85°	17.9
87.5°	8.5
90°	0.0



TEST NUMBER: P867182
 CATALOG NUMBER: PRLX-2004-L-927-117L-L-X-X-GREY-X

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	8.31	9.36	8.68	9.67	9.99	8.31	9.36	8.68	9.67	9.99
	3H	9.88	10.80	10.26	11.14	11.51	9.88	10.80	10.26	11.14	11.51
	4H	10.47	11.33	10.87	11.68	12.07	10.47	11.33	10.87	11.68	12.07
	6H	10.92	11.71	11.34	12.09	12.48	10.92	11.71	11.34	12.09	12.48
	8H	11.08	11.82	11.51	12.21	12.62	11.08	11.82	11.51	12.21	12.62
	12H	11.18	11.89	11.61	12.27	12.70	11.18	11.89	11.61	12.27	12.70
4H	2H	8.78	9.64	9.18	9.99	10.38	8.78	9.64	9.18	9.99	10.38
	3H	10.55	11.26	10.96	11.66	12.07	10.55	11.26	10.96	11.66	12.07
	4H	11.26	11.90	11.70	12.32	12.77	11.26	11.90	11.70	12.32	12.77
	6H	11.85	12.39	12.32	12.84	13.32	11.85	12.39	12.32	12.84	13.32
	8H	12.05	12.56	12.53	13.01	13.48	12.05	12.56	12.53	13.01	13.48
	12H	12.20	12.64	12.69	13.12	13.60	12.20	12.64	12.69	13.12	13.60
8H	4H	11.49	11.99	11.96	12.44	12.92	11.49	11.99	11.96	12.44	12.92
	6H	12.21	12.61	12.72	13.12	13.60	12.21	12.61	12.72	13.12	13.60
	8H	12.50	12.86	13.03	13.38	13.88	12.50	12.86	13.03	13.38	13.88
	12H	12.74	13.05	13.26	13.55	14.12	12.74	13.05	13.26	13.55	14.12
12H	4H	11.49	11.93	11.98	12.41	12.89	11.49	11.93	11.98	12.41	12.89
	6H	12.25	12.61	12.78	13.13	13.63	12.25	12.61	12.78	13.13	13.63
	8H	12.60	12.91	13.12	13.41	13.99	12.60	12.91	13.12	13.41	13.99