

Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: PrentaLux

Report Number: P866415

Luminaire Tested: PRLX-2004-M-927-15L-G-U-S-X-X-WHHR-X

Issue Date: 8/20/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P866415  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2304-993-42)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 8/20/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: Prenalux  
Catalog Number: PRLX-2004-M-927-15L-G-U-S-X-X-WHHR-X  
Description: PRENTALUX 3D PRINTED PENDANT LED LUMINAIRE, MEDIUM LIGHT ENGINE, GLOBE LENS,  
BELL WITH WHITE INTERIOR SHADE.  
LIGHT LEVEL 2  
Light Source: 2700K CCT, 90 CRI LEDS  
Ballast/Driver: -


**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 858.4 lumens  
Efficiency: N/A  
Efficacy: 61.3 lumens/watt  
Spacing Criteria (0/90/45): 1.2 / 1.2 / 1.2  
Luminous Opening: Circular (Dia: 1.31' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 14  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: 0.5 HR  
Operation Time: 3 HR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P866415

CATALOG NUMBER: PRLX-2004-M-927-15L-G-U-S-X-X-WHHR-X

### Luminous Intensity Polar Plot

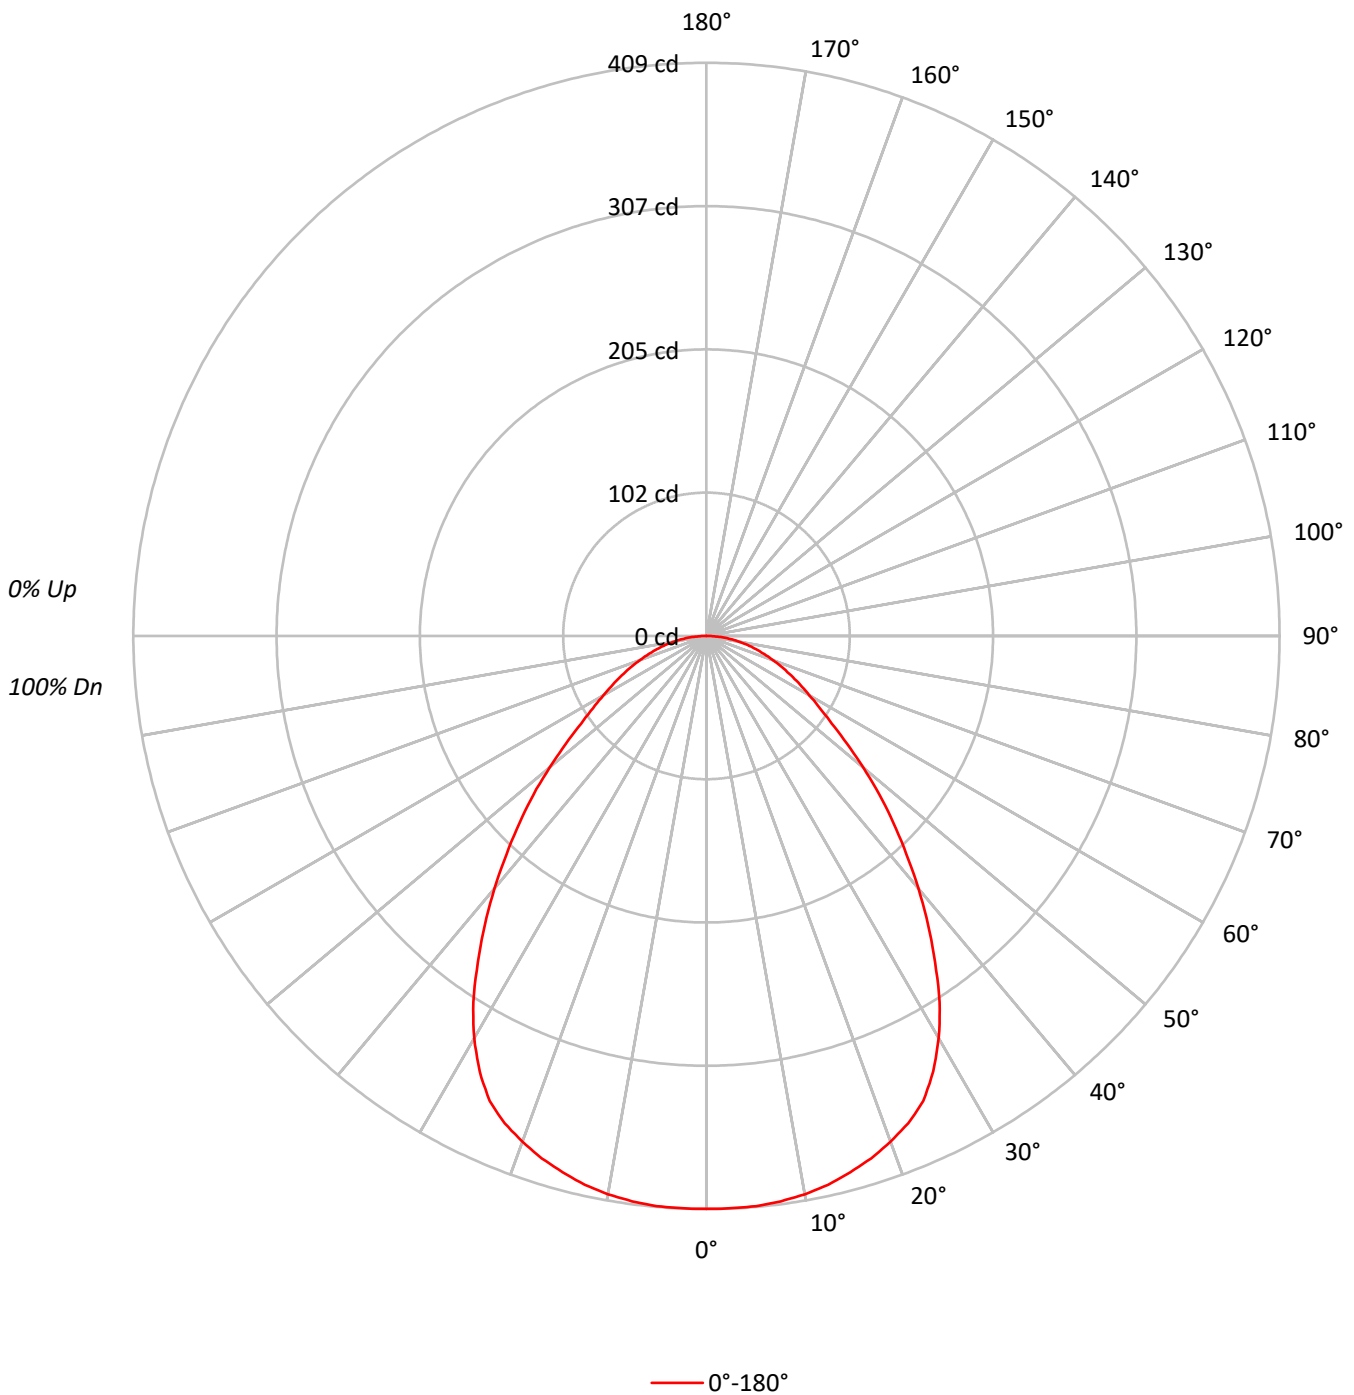



TEST NUMBER: P866415

CATALOG NUMBER: PRLX-2004-M-927-15L-G-U-S-X-X-WHHR-X

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	110	106	102	99	107	104	100	97	99	97	94	96	93	91	92	90	89	87
2	101	94	88	83	99	92	87	82	89	84	80	86	82	78	83	79	77	75
3	94	84	77	71	91	83	76	70	80	74	69	77	72	68	75	70	67	65
4	87	76	68	62	84	74	67	61	72	66	61	70	64	60	68	63	59	57
5	80	69	60	54	78	67	60	54	65	59	53	64	58	53	62	57	52	50
6	75	62	54	48	73	61	54	48	60	53	48	58	52	47	57	51	47	45
7	70	57	49	43	68	56	49	43	55	48	43	53	47	43	52	47	42	40
8	65	53	45	39	64	52	44	39	51	44	39	49	43	39	48	43	38	37
9	61	49	41	36	60	48	41	36	47	40	35	46	40	35	45	39	35	33
10	57	45	38	33	56	45	37	33	44	37	32	43	37	32	42	36	32	31

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	3252
5°	3262
10°	3269
15°	3263
20°	3251
25°	3214
30°	3045
35°	2761
40°	2443
45°	2120
50°	1805
55°	1515
60°	1351
65°	1254
70°	1177
75°	1122
80°	1081
85°	1041

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 2120 cd/sqm

TEST NUMBER: P866415

CATALOG NUMBER: PRLX-2004-M-927-15L-G-U-S-X-X-WHHR-X

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	38.9	4.5
10°-20°	111.9	13.0
20°-30°	167.2	19.5
30°-40°	177.4	20.7
40°-50°	145.7	17.0
50°-60°	99.7	11.6
60°-70°	66.3	7.7
70°-80°	38.8	4.5
80°-90°	12.6	1.5
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	317.9	37.0
0°-40°	495.3	57.7
0°-60°	740.7	86.3
0°-90°	858.4	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	858.4	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	409	
5°	408	39
15°	396	112
25°	366	167
35°	284	177
45°	188	146
55°	109	100
65°	67	66
75°	36	39
85°	11	13
90°	0	

TEST NUMBER: P866415

CATALOG NUMBER: PRLX-2004-M-927-15L-G-U-S-X-X-WHHR-X

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	408.8
2.5°	408.8
5°	408.4
7.5°	406.9
10°	404.6
12.5°	401.1
15°	396.2
17.5°	390.9
20°	384.0
22.5°	376.4
25°	366.1
27.5°	350.5
30°	331.5
32.5°	309.8
35°	284.3
37.5°	259.9
40°	235.2
42.5°	211.2
45°	188.4
47.5°	167.5
50°	145.8
52.5°	126.4
55°	109.2
57.5°	95.9
60°	84.9
62.5°	75.4
65°	66.6
67.5°	58.2
70°	50.6
72.5°	43.4
75°	36.5
77.5°	30.1
80°	23.6
82.5°	17.5
85°	11.4
87.5°	5.7
90°	0.0



TEST NUMBER: P866415  
 CATALOG NUMBER: PRLX-2004-M-927-15L-G-U-S-X-X-WHHR-X

**CIE UGR TABLE:**

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	12.22	13.70	12.59	14.01	14.33	12.22	13.70	12.59	14.01	14.33
	3H	13.81	15.13	14.18	15.46	15.82	13.81	15.13	14.18	15.46	15.82
	4H	14.45	15.68	14.85	16.03	16.41	14.45	15.68	14.85	16.03	16.41
	6H	14.97	16.11	15.38	16.48	16.87	14.97	16.11	15.38	16.48	16.87
	8H	15.16	16.25	15.59	16.64	17.04	15.16	16.25	15.59	16.64	17.04
	12H	15.30	16.34	15.73	16.72	17.15	15.30	16.34	15.73	16.72	17.15
4H	2H	12.75	13.99	13.15	14.34	14.72	12.75	13.99	13.15	14.34	14.72
	3H	14.57	15.60	14.98	16.00	16.40	14.57	15.60	14.98	16.00	16.40
	4H	15.35	16.27	15.78	16.69	17.13	15.35	16.27	15.78	16.69	17.13
	6H	16.02	16.82	16.47	17.27	17.73	16.02	16.82	16.47	17.27	17.73
	8H	16.26	17.02	16.73	17.46	17.93	16.26	17.02	16.73	17.46	17.93
	12H	16.46	17.13	16.94	17.61	18.08	16.46	17.13	16.94	17.61	18.08
8H	4H	15.64	16.40	16.11	16.84	17.31	15.64	16.40	16.11	16.84	17.31
	6H	16.45	17.07	16.95	17.57	18.04	16.45	17.07	16.95	17.57	18.04
	8H	16.79	17.35	17.30	17.86	18.35	16.79	17.35	17.30	17.86	18.35
	12H	17.07	17.57	17.59	18.06	18.63	17.07	17.57	17.59	18.06	18.63
12H	4H	15.67	16.35	16.16	16.83	17.30	15.67	16.35	16.16	16.83	17.30
	6H	16.51	17.07	17.03	17.58	18.07	16.51	17.07	17.03	17.58	18.07
	8H	16.91	17.41	17.42	17.90	18.47	16.91	17.41	17.42	17.90	18.47