

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: PrentaLux

Report Number: P866471

Luminaire Tested: PRLX-2004-M-930-07L-G-U-S-X-X-WHHR-X

Issue Date: 8/20/2024

Test Information

Test Method: LM-79-2019
Report Number: P866471
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2304-993-42)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 8/20/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: Prenalux
Catalog Number: PRLX-2004-M-930-07L-G-U-S-X-X-WHHR-X
Description: PRENTALUX 3D PRINTED PENDANT LED LUMINAIRE, MEDIUM LIGHT ENGINE, GLOBE LENS,
BELL WITH WHITE INTERIOR SHADE.
LIGHT LEVEL 1
Light Source: 3000K CCT, 90 CRI LEDS
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 423.4 lumens
Efficiency: N/A
Efficacy: 51.6 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.2 / 1.2
Luminous Opening: Circular (Dia: 1.31' x H: 0')
CIE Type: Direct

Input Watts (W): 8.2
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: 0.5 HR
Operation Time: 3 HR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P866471

CATALOG NUMBER: PRLX-2004-M-930-07L-G-U-S-X-X-WHHR-X

Luminous Intensity Polar Plot

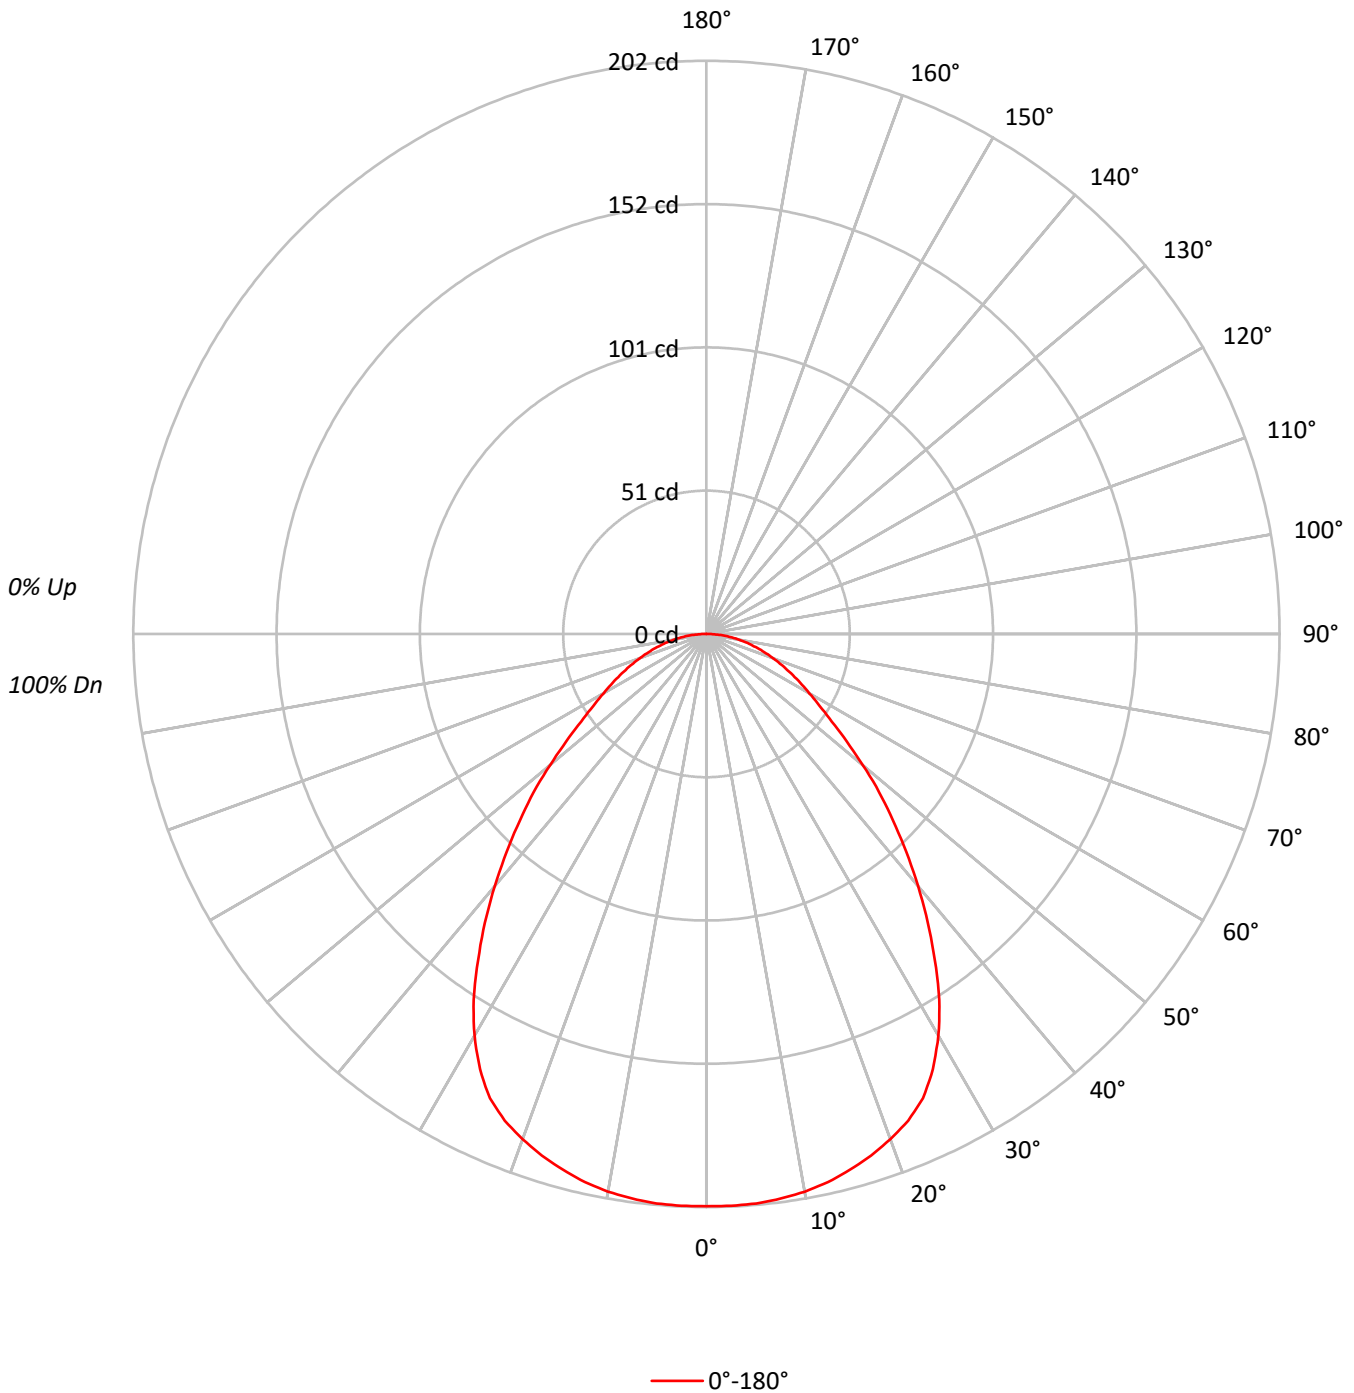



TEST NUMBER: P866471

CATALOG NUMBER: PRLX-2004-M-930-07L-G-U-S-X-X-WHHR-X

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	110	106	102	99	107	104	100	97	99	97	94	96	93	91	92	90	89	87
2	101	94	88	83	99	92	87	82	89	84	80	86	82	78	83	79	77	75
3	94	84	77	71	91	83	76	70	80	74	69	77	72	68	75	70	67	65
4	87	76	68	62	84	74	67	61	72	66	61	70	64	60	68	63	59	57
5	80	69	60	54	78	67	60	54	65	59	53	64	58	53	62	57	52	50
6	75	62	54	48	73	61	54	48	60	53	48	58	52	47	57	51	47	45
7	70	57	49	43	68	56	49	43	55	48	43	53	47	43	52	47	42	40
8	65	53	45	39	64	52	44	39	51	44	39	49	43	39	48	43	38	37
9	61	49	41	36	60	48	41	36	47	40	35	46	40	35	45	39	35	33
10	57	45	38	33	56	45	37	33	44	37	32	43	37	32	42	36	32	31

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	1605
5°	1609
10°	1612
15°	1610
20°	1604
25°	1585
30°	1502
35°	1363
40°	1205
45°	1045
50°	890
55°	748
60°	667
65°	619
70°	582
75°	553
80°	531
85°	511

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 1045 cd/sqm

TEST NUMBER: P866471

CATALOG NUMBER: PRLX-2004-M-930-07L-G-U-S-X-X-WHHR-X

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	19.2	4.5
10°-20°	55.2	13.0
20°-30°	82.5	19.5
30°-40°	87.5	20.7
40°-50°	71.9	17.0
50°-60°	49.2	11.6
60°-70°	32.7	7.7
70°-80°	19.1	4.5
80°-90°	6.2	1.5
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	156.8	37.0
0°-40°	244.3	57.7
0°-60°	365.4	86.3
0°-90°	423.4	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	423.4	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	202	
5°	202	19
15°	196	55
25°	181	82
35°	140	88
45°	93	72
55°	54	49
65°	33	33
75°	18	19
85°	6	6
90°	0	

TEST NUMBER: P866471

CATALOG NUMBER: PRLX-2004-M-930-07L-G-U-S-X-X-WHHR-X

CANDELA DISTRIBUTION (FULL):

0°	
0°	201.7
2.5°	201.7
5°	201.5
7.5°	200.7
10°	199.6
12.5°	197.9
15°	195.5
17.5°	192.8
20°	189.5
22.5°	185.7
25°	180.6
27.5°	172.9
30°	163.5
32.5°	152.8
35°	140.3
37.5°	128.2
40°	116.0
42.5°	104.2
45°	92.9
47.5°	82.6
50°	71.9
52.5°	62.3
55°	53.9
57.5°	47.3
60°	41.9
62.5°	37.2
65°	32.9
67.5°	28.7
70°	25.0
72.5°	21.4
75°	18.0
77.5°	14.8
80°	11.6
82.5°	8.6
85°	5.6
87.5°	2.8
90°	0.0

TEST NUMBER: P866471
 CATALOG NUMBER: PRLX-2004-M-930-07L-G-U-S-X-X-WHHR-X

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	9.77	11.24	10.13	11.56	11.87	9.77	11.24	10.13	11.56	11.87
	3H	11.35	12.67	11.73	13.00	13.36	11.35	12.67	11.73	13.00	13.36
	4H	11.99	13.23	12.39	13.58	13.96	11.99	13.23	12.39	13.58	13.96
	6H	12.51	13.65	12.92	14.02	14.41	12.51	13.65	12.92	14.02	14.41
	8H	12.70	13.79	13.13	14.18	14.58	12.70	13.79	13.13	14.18	14.58
	12H	12.84	13.88	13.27	14.26	14.69	12.84	13.88	13.27	14.26	14.69
4H	2H	10.30	11.54	10.70	11.89	12.26	10.30	11.54	10.70	11.89	12.26
	3H	12.12	13.15	12.53	13.55	13.95	12.12	13.15	12.53	13.55	13.95
	4H	12.90	13.82	13.33	14.24	14.68	12.90	13.82	13.33	14.24	14.68
	6H	13.56	14.36	14.02	14.81	15.27	13.56	14.36	14.02	14.81	15.27
	8H	13.80	14.56	14.27	15.00	15.47	13.80	14.56	14.27	15.00	15.47
	12H	14.00	14.67	14.48	15.15	15.62	14.00	14.67	14.48	15.15	15.62
8H	4H	13.19	13.94	13.65	14.39	14.85	13.19	13.94	13.65	14.39	14.85
	6H	13.99	14.61	14.49	15.10	15.58	13.99	14.61	14.49	15.10	15.58
	8H	14.32	14.88	14.84	15.39	15.88	14.32	14.88	14.84	15.39	15.88
	12H	14.61	15.11	15.12	15.60	16.16	14.61	15.11	15.12	15.60	16.16
12H	4H	13.22	13.89	13.70	14.37	14.84	13.22	13.89	13.70	14.37	14.84
	6H	14.05	14.61	14.57	15.12	15.61	14.05	14.61	14.57	15.12	15.61
	8H	14.45	14.95	14.96	15.44	16.00	14.45	14.95	14.96	15.44	16.00