

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: PrentaLux

Report Number: P866489

Luminaire Tested: PRLX-2004-M-930-25L-L-U-S-X-X-BRSS-X

Issue Date: 8/20/2024

Test Information

Test Method: LM-79-2019
Report Number: P866489
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2304-993-55)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 8/20/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: Prenalux
Catalog Number: PRLX-2004-M-930-25L-L-U-S-X-X-BRSS-X
Description: PRENATALUX 3D PRINTED PENDANT LED LUMINAIRE, MEDIUM LIGHT ENGINE, FLAT LENS,
BELL WITH BRASS INTERIOR SHADE.
LIGHT LEVEL 3
Light Source: 3000K CCT, 90 CRI LEDS
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1283.3 lumens
Efficiency: N/A
Efficacy: 59.1 lumens/watt
Spacing Criteria (0/90/45): 1.03 / 1.03 / 1
Luminous Opening: Circular (Dia: 1.31' x H: 0')
CIE Type: Direct

Input Watts (W): 21.7
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: 0.5 HR
Operation Time: 3 HR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P866489

CATALOG NUMBER: PRLX-2004-M-930-25L-L-U-S-X-X-BRSS-X

Luminous Intensity Polar Plot

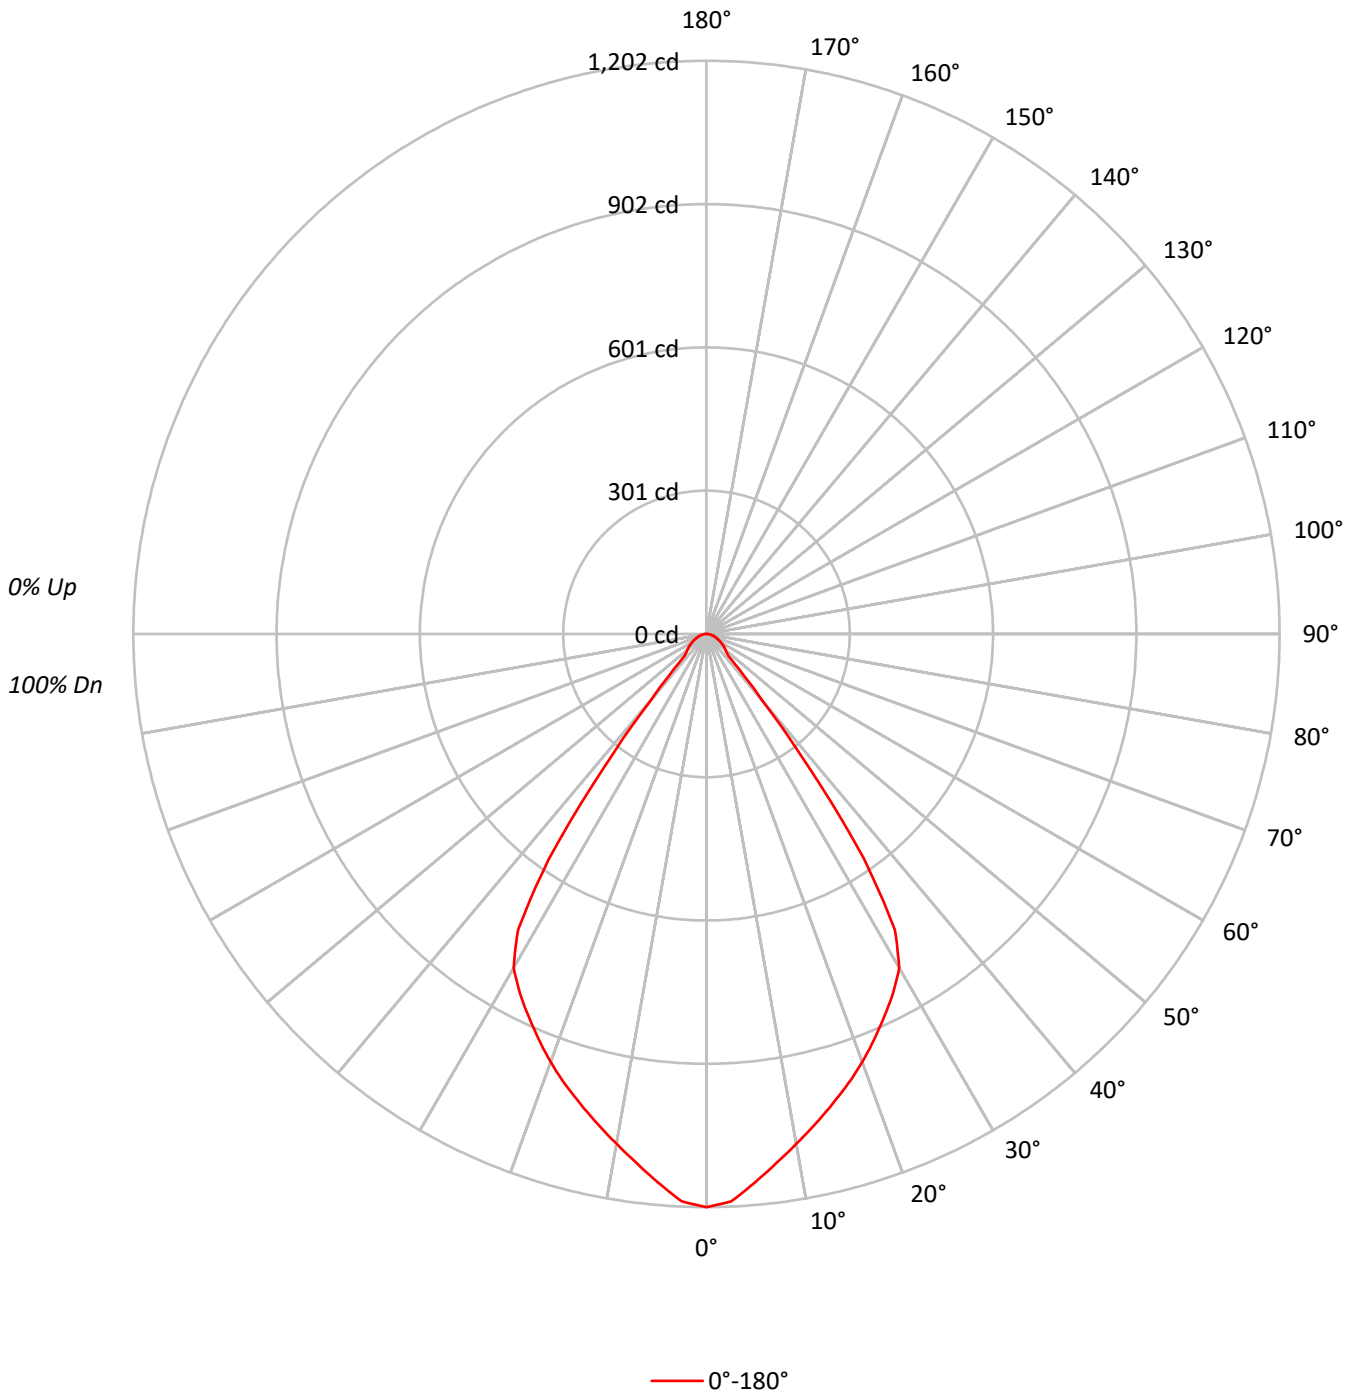



TEST NUMBER: P866489

CATALOG NUMBER: PRLX-2004-M-930-25L-L-U-S-X-X-BRSS-X

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	113	110	107	104	110	107	105	103	103	101	99		100	98	97		96	95	94	92
2	106	101	96	93	104	99	95	92	96	93	90		93	90	88		90	88	86	84
3	100	93	88	83	98	92	87	83	89	85	81		87	83	80		84	81	79	77
4	95	86	80	76	93	85	80	75	83	78	74		81	77	74		79	76	73	71
5	90	80	74	69	88	79	73	69	78	72	68		76	71	68		74	70	67	66
6	85	75	68	64	83	74	68	64	73	67	63		71	66	63		70	66	62	61
7	80	70	64	59	79	69	63	59	68	62	58		67	62	58		66	61	58	56
8	76	66	59	55	75	65	59	55	64	58	54		63	58	54		62	57	54	52
9	72	62	55	51	71	61	55	51	60	55	51		59	54	51		58	54	50	49
10	68	58	52	48	67	58	52	48	57	51	47		56	51	47		55	50	47	46

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	9564
5°	9229
10°	8772
15°	8406
20°	8090
25°	7757
30°	7427
35°	5592
40°	1885
45°	734
50°	650
55°	599
60°	551
65°	501
70°	463
75°	449
80°	426
85°	429

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 734 cd/sqm



TEST NUMBER: P866489

CATALOG NUMBER: PRLX-2004-M-930-25L-L-U-S-X-X-BRSS-X

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	108.1	8.4
10°-20°	287.5	22.4
20°-30°	406.9	31.7
30°-40°	330.2	25.7
40°-50°	64.8	5.1
50°-60°	38.7	3.0
60°-70°	26.6	2.1
70°-80°	15.4	1.2
80°-90°	4.9	0.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	802.6	62.5
0°-40°	1132.8	88.3
0°-60°	1236.3	96.3
0°-90°	1283.3	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1283.3	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1202	
5°	1156	108
15°	1021	287
25°	884	407
35°	576	330
45°	65	65
55°	43	39
65°	27	27
75°	15	15
85°	5	5
90°	0	

TEST NUMBER: P866489

CATALOG NUMBER: PRLX-2004-M-930-25L-L-U-S-X-X-BRSS-X

CANDELA DISTRIBUTION (FULL):

	0°
0°	1202.2
2.5°	1190.9
5°	1155.6
7.5°	1119.7
10°	1085.8
12.5°	1053.2
15°	1020.6
17.5°	988.7
20°	955.5
22.5°	919.6
25°	883.7
27.5°	848.4
30°	808.5
32.5°	735.4
35°	575.8
37.5°	349.7
40°	181.5
42.5°	102.4
45°	65.2
47.5°	56.5
50°	52.5
52.5°	47.9
55°	43.2
57.5°	38.6
60°	34.6
62.5°	30.6
65°	26.6
67.5°	23.3
70°	19.9
72.5°	17.3
75°	14.6
77.5°	12.0
80°	9.3
82.5°	6.6
85°	4.7
87.5°	2.0
90°	0.0

TEST NUMBER: P866489

CATALOG NUMBER: PRLX-2004-M-930-25L-L-U-S-X-X-BRSS-X

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	5.04	6.09	5.40	6.40	6.72	5.04	6.09	5.40	6.40	6.72
	3H	6.53	7.46	6.91	7.79	8.16	6.53	7.46	6.91	7.79	8.16
	4H	7.14	8.00	7.54	8.36	8.74	7.14	8.00	7.54	8.36	8.74
	6H	7.62	8.41	8.04	8.79	9.18	7.62	8.41	8.04	8.79	9.18
	8H	7.78	8.52	8.21	8.91	9.32	7.78	8.52	8.21	8.91	9.32
	12H	7.89	8.61	8.33	8.99	9.42	7.89	8.61	8.33	8.99	9.42
4H	2H	5.47	6.34	5.88	6.69	7.08	5.47	6.34	5.88	6.69	7.08
	3H	7.19	7.90	7.60	8.30	8.71	7.19	7.90	7.60	8.30	8.71
	4H	7.93	8.56	8.37	8.99	9.43	7.93	8.56	8.37	8.99	9.43
	6H	8.55	9.09	9.02	9.54	10.01	8.55	9.09	9.02	9.54	10.01
	8H	8.75	9.26	9.23	9.71	10.18	8.75	9.26	9.23	9.71	10.18
	12H	8.92	9.36	9.41	9.85	10.32	8.92	9.36	9.41	9.85	10.32
8H	4H	8.16	8.67	8.64	9.12	9.59	8.16	8.67	8.64	9.12	9.59
	6H	8.92	9.32	9.43	9.83	10.31	8.92	9.32	9.43	9.83	10.31
	8H	9.21	9.57	9.74	10.09	10.59	9.21	9.57	9.74	10.09	10.59
	12H	9.48	9.79	10.00	10.29	10.87	9.48	9.79	10.00	10.29	10.87
12H	4H	8.17	8.60	8.66	9.09	9.57	8.17	8.60	8.66	9.09	9.57
	6H	8.96	9.32	9.49	9.84	10.34	8.96	9.32	9.49	9.84	10.34
	8H	9.31	9.62	9.83	10.12	10.70	9.31	9.62	9.83	10.12	10.70