

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: PrentaLux

Report Number: P866536

Luminaire Tested: PRLX-2004-M-935-07L-L-U-S-X-X-BLAK-X

Issue Date: 8/20/2024

Test Information

Test Method: LM-79-2019
Report Number: P866536
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2304-993-57)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 8/20/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: Prenalux
Catalog Number: PRLX-2004-M-935-07L-L-U-S-X-X-BLAK-X
Description: PRENTALUX 3D PRINTED PENDANT LED LUMINAIRE, MEDIUM LIGHT ENGINE, FLAT LENS,
BELL WITH BLACK INTERIOR SHADE.
LIGHT LEVEL 1
Light Source: 3500K CCT, 90 CRI LEDS
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 304.9 lumens
Efficiency: N/A
Efficacy: 37.2 lumens/watt
Spacing Criteria (0/90/45): 1.06 / 1.06 / 1
Luminous Opening: Circular (Dia: 1.31' x H: 0')
CIE Type: Direct

Input Watts (W): 8.2
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: 0.333 HR
Operation Time: 3 HR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P866536

CATALOG NUMBER: PRLX-2004-M-935-07L-L-U-S-X-X-BLAK-X

Luminous Intensity Polar Plot

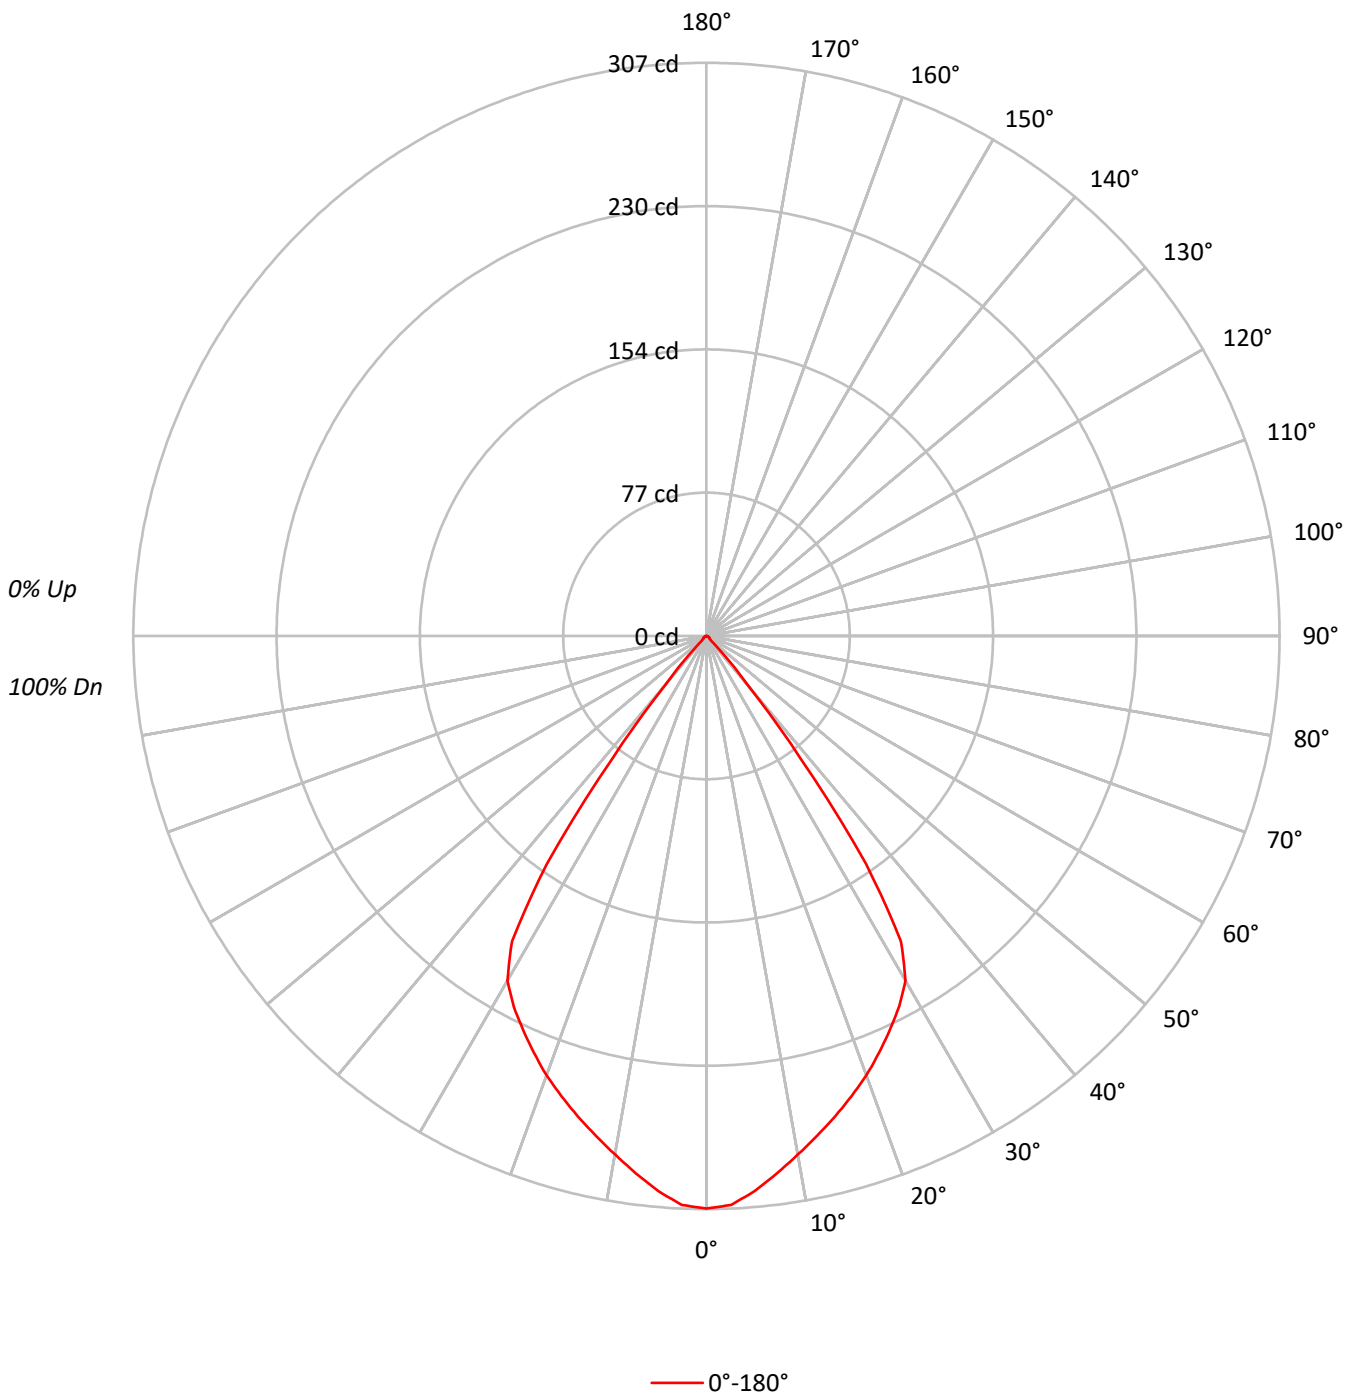



TEST NUMBER: P866536

CATALOG NUMBER: PRLX-2004-M-935-07L-L-U-S-X-X-BLAK-X

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

| | | | | | | | | | | | | | | | | | | |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| RF | 20 | | | | 20 | | | | 20 | | | | 20 | | | | 20 | |
| RC | 80 | | | | 70 | | | | 50 | | | | 30 | | | | 10 | 0 |
| RW | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 0 |
| RCR | | | | | | | | | | | | | | | | | | |
| 0 | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 | 106 | 106 | 106 | 102 | 102 | 102 | 100 |
| 1 | 113 | 111 | 108 | 106 | 111 | 108 | 106 | 104 | 104 | 103 | 101 | 101 | 99 | 98 | 97 | 96 | 95 | 93 |
| 2 | 108 | 103 | 99 | 95 | 106 | 101 | 97 | 94 | 98 | 95 | 92 | 95 | 92 | 90 | 92 | 90 | 88 | 87 |
| 3 | 102 | 96 | 91 | 87 | 100 | 94 | 90 | 86 | 92 | 88 | 85 | 89 | 86 | 83 | 87 | 84 | 82 | 81 |
| 4 | 97 | 89 | 84 | 80 | 95 | 88 | 83 | 79 | 86 | 82 | 78 | 84 | 80 | 77 | 82 | 79 | 76 | 75 |
| 5 | 92 | 84 | 78 | 73 | 90 | 83 | 77 | 73 | 81 | 76 | 72 | 79 | 75 | 72 | 78 | 74 | 71 | 70 |
| 6 | 87 | 78 | 72 | 68 | 86 | 77 | 72 | 68 | 76 | 71 | 67 | 75 | 70 | 67 | 73 | 69 | 66 | 65 |
| 7 | 83 | 73 | 67 | 63 | 81 | 73 | 67 | 63 | 71 | 66 | 62 | 70 | 66 | 62 | 69 | 65 | 62 | 60 |
| 8 | 79 | 69 | 63 | 59 | 77 | 68 | 63 | 59 | 67 | 62 | 58 | 66 | 62 | 58 | 65 | 61 | 58 | 56 |
| 9 | 75 | 65 | 59 | 55 | 74 | 64 | 59 | 55 | 63 | 58 | 55 | 63 | 58 | 54 | 62 | 57 | 54 | 53 |
| 10 | 71 | 61 | 55 | 51 | 70 | 61 | 55 | 51 | 60 | 55 | 51 | 59 | 54 | 51 | 58 | 54 | 51 | 50 |

AVERAGE LUMINANCE (cd/sqm):

| | |
|-----|------|
| | 0° |
| 0° | 2440 |
| 5° | 2382 |
| 10° | 2278 |
| 15° | 2193 |
| 20° | 2120 |
| 25° | 2042 |
| 30° | 1959 |
| 35° | 1447 |
| 40° | 367 |
| 45° | 43 |
| 50° | 28 |
| 55° | 26 |
| 60° | 24 |
| 65° | 21 |
| 70° | 19 |
| 75° | 18 |
| 80° | 18 |
| 85° | 18 |

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 43 cd/sqm

TEST NUMBER: P866536

CATALOG NUMBER: PRLX-2004-M-935-07L-L-U-S-X-X-BLAK-X

ZONAL LUMENS:

| Zone | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10° | 28.0 | 9.2 |
| 10°-20° | 75.0 | 24.6 |
| 20°-30° | 107.1 | 35.1 |
| 30°-40° | 83.9 | 27.5 |
| 40°-50° | 7.3 | 2.4 |
| 50°-60° | 1.7 | 0.6 |
| 60°-70° | 1.1 | 0.4 |
| 70°-80° | 0.6 | 0.2 |
| 80°-90° | 0.2 | 0.1 |
| 90°-100° | 0.0 | 0.0 |
| 100°-110° | 0.0 | 0.0 |
| 110°-120° | 0.0 | 0.0 |
| 120°-130° | 0.0 | 0.0 |
| 130°-140° | 0.0 | 0.0 |
| 140°-150° | 0.0 | 0.0 |
| 150°-160° | 0.0 | 0.0 |
| 160°-170° | 0.0 | 0.0 |
| 170°-180° | 0.0 | 0.0 |
| 0°-30° | 210.0 | 68.9 |
| 0°-40° | 294.0 | 96.4 |
| 0°-60° | 303.0 | 99.4 |
| 0°-90° | 304.9 | 100.0 |
| 90°-120° | 0.0 | 0.0 |
| 90°-150° | 0.0 | 0.0 |
| 90°-180° | 0.0 | 0.0 |
| 0°-180° | 304.9 | 100.0 |

CANDELA DISTRIBUTION:

| | 0° | Flux |
|-----|-----|------|
| 0° | 307 | |
| 5° | 298 | 28 |
| 15° | 266 | 75 |
| 25° | 233 | 107 |
| 35° | 149 | 84 |
| 45° | 4 | 7 |
| 55° | 2 | 2 |
| 65° | 1 | 1 |
| 75° | 1 | 1 |
| 85° | 0 | 0 |
| 90° | 0 | |

TEST NUMBER: P866536

CATALOG NUMBER: PRLX-2004-M-935-07L-L-U-S-X-X-BLAK-X

CANDELA DISTRIBUTION (FULL):

| 0° | |
|-------|-------|
| 0° | 306.7 |
| 2.5° | 305.0 |
| 5° | 298.3 |
| 7.5° | 290.2 |
| 10° | 282.0 |
| 12.5° | 274.1 |
| 15° | 266.3 |
| 17.5° | 258.4 |
| 20° | 250.4 |
| 22.5° | 241.6 |
| 25° | 232.6 |
| 27.5° | 223.6 |
| 30° | 213.2 |
| 32.5° | 193.9 |
| 35° | 149.0 |
| 37.5° | 82.4 |
| 40° | 35.3 |
| 42.5° | 14.0 |
| 45° | 3.8 |
| 47.5° | 2.7 |
| 50° | 2.3 |
| 52.5° | 2.1 |
| 55° | 1.9 |
| 57.5° | 1.7 |
| 60° | 1.5 |
| 62.5° | 1.3 |
| 65° | 1.1 |
| 67.5° | 1.0 |
| 70° | 0.8 |
| 72.5° | 0.8 |
| 75° | 0.6 |
| 77.5° | 0.4 |
| 80° | 0.4 |
| 82.5° | 0.2 |
| 85° | 0.2 |
| 87.5° | 0.0 |
| 90° | 0.0 |



TEST NUMBER: P866536
 CATALOG NUMBER: PRLX-2004-M-935-07L-L-U-S-X-X-BLAK-X

CIE UGR TABLE:

| Reflectances: | | | | | | | | | | | |
|-----------------|------|------------------|------|------|------|------|----------------|------|------|------|------|
| Ceiling | | 0.7 | 0.7 | 0.5 | 0.5 | 0.3 | 0.7 | 0.7 | 0.5 | 0.5 | 0.3 |
| Wall | | 0.5 | 0.3 | 0.5 | 0.3 | 0.3 | 0.5 | 0.3 | 0.5 | 0.3 | 0.3 |
| Reference plane | | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 |
| Room dimensions | | Viewed crosswise | | | | | Viewed endwise | | | | |
| X=2H | Y=2H | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| | 3H | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| | 4H | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| | 6H | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| | 8H | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| | 12H | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 4H | 2H | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| | 3H | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| | 4H | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| | 6H | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| | 8H | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| | 12H | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 8H | 4H | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| | 6H | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| | 8H | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| | 12H | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 12H | 4H | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| | 6H | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| | 8H | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |