

Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: PrentaLux

Report Number: P865760

Luminaire Tested: PRLX-2004-S-927-20L-L-U-S-X-X-BLAK-X

Issue Date: 8/20/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P865760  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2304-993-26)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 8/20/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: Prenalux  
Catalog Number: PRLX-2004-S-927-20L-L-U-S-X-X-BLAK-X  
Description: PRENTALUX 3D PRINTED PENDANT LED LUMINAIRE, SMALL LIGHT ENGINE, FLAT LENS, BELL WITH BLACK INTERIOR SHADE.  
LIGHT LEVEL 4  
Light Source: 2700K CCT, 90 CRI LEDS  
Ballast/Driver: -


**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 775.9 lumens  
Efficiency: N/A  
Efficacy: 35.6 lumens/watt  
Spacing Criteria (0/90/45): 1.08 / 1.08 / 1.02  
Luminous Opening: Circular (Dia: 0.92' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 21.8  
Input Voltage (V): 120  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: 0.5 HR  
Operation Time: 3 HR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P865760

CATALOG NUMBER: PRLX-2004-S-927-20L-L-U-S-X-X-BLAK-X

### Luminous Intensity Polar Plot

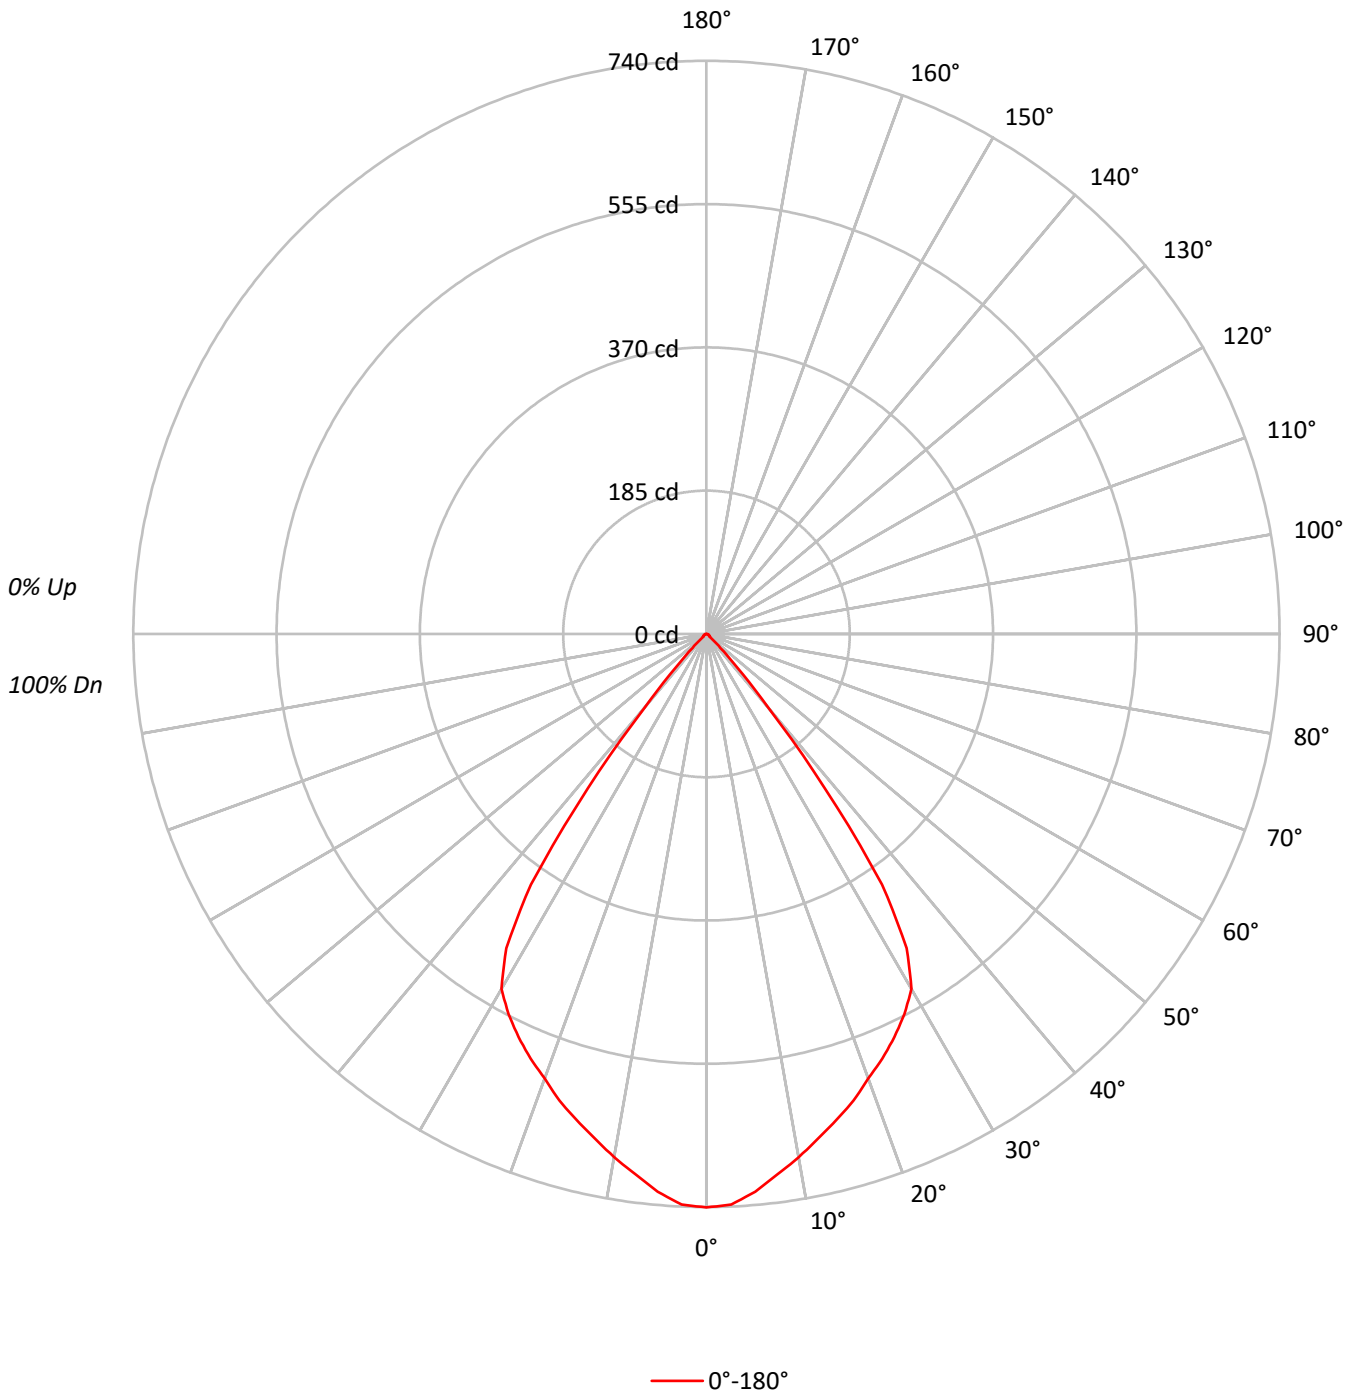



TEST NUMBER: P865760

CATALOG NUMBER: PRLX-2004-S-927-20L-L-U-S-X-X-BLAK-X

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	113	111	108	106	111	108	106	104	104	103	101	101	99	98	97	96	95	93
2	108	103	98	95	105	101	97	94	98	95	92	95	92	90	92	90	88	86
3	102	95	90	86	100	94	89	86	91	87	84	89	86	83	87	84	82	80
4	97	89	83	79	95	88	82	78	86	81	77	84	80	77	82	78	76	74
5	91	83	77	72	90	82	76	72	80	75	72	78	74	71	77	73	70	69
6	87	78	71	67	85	77	71	67	75	70	66	74	69	66	72	68	65	64
7	82	73	66	62	81	72	66	62	71	65	62	69	65	61	68	64	61	59
8	78	68	62	58	77	67	62	58	66	61	57	65	61	57	64	60	57	55
9	74	64	58	54	73	63	58	54	63	57	53	62	57	53	61	56	53	52
10	70	60	54	50	69	60	54	50	59	54	50	58	53	50	57	53	50	48

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	12076
5°	11834
10°	11361
15°	10964
20°	10603
25°	10332
30°	9968
35°	7865
40°	2621
45°	590
50°	162
55°	136
60°	104
65°	123
70°	76
75°	101
80°	150
85°	0

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 590 cd/sqm

TEST NUMBER: P865760

CATALOG NUMBER: PRLX-2004-S-927-20L-L-U-S-X-X-BLAK-X

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	67.8	8.7
10°-20°	182.9	23.6
20°-30°	264.0	34.0
30°-40°	223.1	28.7
40°-50°	29.0	3.7
50°-60°	4.3	0.6
60°-70°	3.0	0.4
70°-80°	1.7	0.2
80°-90°	0.2	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	514.7	66.3
0°-40°	737.7	95.1
0°-60°	771.1	99.4
0°-90°	775.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	775.9	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	740	
5°	723	68
15°	649	183
25°	574	264
35°	395	223
45°	26	29
55°	5	4
65°	3	3
75°	2	2
85°	0	0
90°	0	

TEST NUMBER: P865760

CATALOG NUMBER: PRLX-2004-S-927-20L-L-U-S-X-X-BLAK-X

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	740.4
2.5°	737.2
5°	722.8
7.5°	703.6
10°	686.0
12.5°	666.8
15°	649.3
17.5°	631.7
20°	610.9
22.5°	593.3
25°	574.1
27.5°	553.3
30°	529.3
32.5°	481.3
35°	395.0
37.5°	251.1
40°	123.1
42.5°	57.6
45°	25.6
47.5°	8.0
50°	6.4
52.5°	4.8
55°	4.8
57.5°	4.8
60°	3.2
62.5°	3.2
65°	3.2
67.5°	3.2
70°	1.6
72.5°	1.6
75°	1.6
77.5°	1.6
80°	1.6
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



TEST NUMBER: P865760

CATALOG NUMBER: PRLX-2004-S-927-20L-L-U-S-X-X-BLAK-X

**CIE UGR TABLE:**

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	3H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	4H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	6H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	8H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	12H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
4H	2H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	3H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	4H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	6H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	8H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	12H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
8H	4H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	6H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	8H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	12H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
12H	4H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	6H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	8H	0.00	0.00	0.00	0.00	0.04	0.00	0.00	0.00	0.00	0.04