

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: PrentaLux

Report Number: P600614

Luminaire Tested: PRLX-235-90-35K-LL4-UNV-STD-X-X-WHHR-FL-X

Issue Date: 7/6/2022

**Test Information**

Test Method: LM-79-2019  
Report Number: P600614  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2203-582-11)  
Test Lab: INNOVATION CENTER  
Issue Date: 7/6/2022  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PentaLux  
Catalog Number: PRLX-235-90-35K-LL4-UNV-STD-X-X-WHHR-FL-X  
Description: PentaLux 200 SERIES 3D PRINTED LUMINAIRE  
Light Source: 3500K CCT, 90 CRI LEDS  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 2846.9 lumens  
Efficiency: N/A  
Efficacy: 122.7 lumens/watt  
Spacing Criteria (0/90/45): 1.01 / 1.01 / 1.17  
Luminous Opening: Circular (Dia: 1.33' x H: 0')  
CIE Type: Direct


Input Watts (W): 23.2  
Input Voltage (V): 120  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT



TEST NUMBER: P600614

CATALOG NUMBER: PRLX-235-90-35K-LL4-UNV-STD-X-X-WHHR-FL-X

### Luminous Intensity Polar Plot

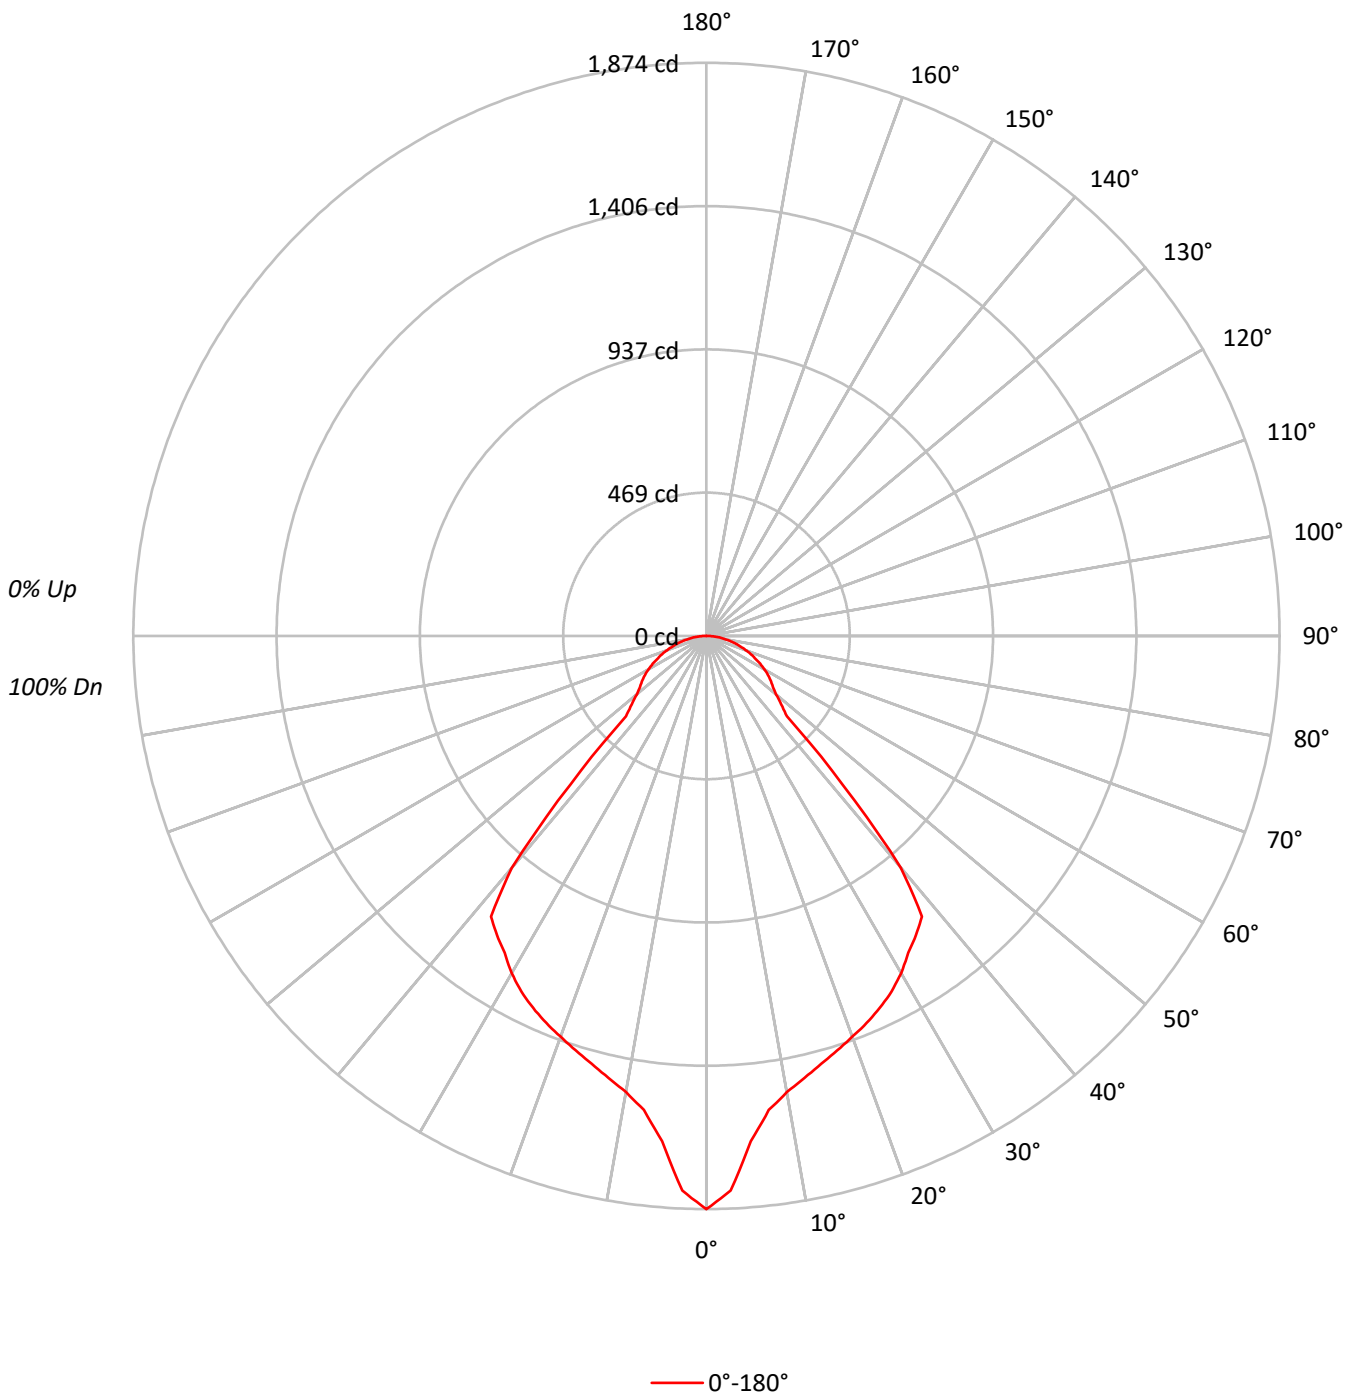



TEST NUMBER: P600614

CATALOG NUMBER: PRLX-235-90-35K-LL4-UNV-STD-X-X-WHHR-FL-X

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	111	107	103	100	108	105	101	99	100	98	95		97	95	93		93	91	90	88
2	103	96	90	86	100	94	89	85	91	86	83		88	84	81		85	82	79	77
3	95	87	80	74	93	85	79	74	82	77	72		80	75	71		77	73	70	68
4	89	79	71	65	87	77	70	65	75	69	64		73	68	63		71	66	63	61
5	83	72	64	58	81	71	63	58	69	62	57		67	61	57		65	60	56	54
6	77	66	58	52	75	65	57	52	63	56	52		61	56	51		60	55	51	49
7	72	60	53	47	71	60	52	47	58	52	47		57	51	46		56	50	46	44
8	68	56	48	43	66	55	48	43	54	47	43		53	47	42		52	46	42	41
9	64	52	44	39	62	51	44	39	50	44	39		49	43	39		48	43	39	37
10	60	48	41	36	59	48	41	36	47	40	36		46	40	36		45	40	36	34

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	14449
5°	12831
10°	11854
15°	11563
20°	11439
25°	11413
30°	11335
35°	11237
40°	9960
45°	4055
50°	3568
55°	3452
60°	3380
65°	3238
70°	3106
75°	2985
80°	2863
85°	2804

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 4055 cd/sqm



TEST NUMBER: P600614

CATALOG NUMBER: PRLX-235-90-35K-LL4-UNV-STD-X-X-WHHR-FL-X

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	154.4	5.4
10°-20°	409.6	14.4
20°-30°	618.2	21.7
30°-40°	737.2	25.9
40°-50°	381.2	13.4
50°-60°	229.9	8.1
60°-70°	176.2	6.2
70°-80°	105.7	3.7
80°-90°	34.7	1.2
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1182.1	41.5
0°-40°	1919.3	67.4
0°-60°	2530.4	88.9
0°-90°	2846.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2846.9	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	1874	
5°	1658	154
15°	1449	410
25°	1342	618
35°	1194	737
45°	372	381
55°	257	230
65°	178	176
75°	100	106
85°	32	35
90°	0	



TEST NUMBER: P600614

CATALOG NUMBER: PRLX-235-90-35K-LL4-UNV-STD-X-X-WHHR-FL-X

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	1874.3
2.5°	1814.8
5°	1658.1
7.5°	1562.9
10°	1514.3
12.5°	1479.6
15°	1448.8
17.5°	1421.1
20°	1394.3
22.5°	1369.5
25°	1341.7
27.5°	1311.0
30°	1273.3
32.5°	1228.7
35°	1194.0
37.5°	1157.3
40°	989.7
42.5°	659.5
45°	371.9
47.5°	331.2
50°	297.5
52.5°	273.7
55°	256.8
57.5°	239.0
60°	219.2
62.5°	198.3
65°	177.5
67.5°	157.7
70°	137.8
72.5°	118.0
75°	100.2
77.5°	81.3
80°	64.5
82.5°	47.6
85°	31.7
87.5°	15.9
90°	0.0

(END OF REPORT)