

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: PrentaLux

Report Number: P735766

Luminaire Tested: PRLX-UHBS-2436-MV-L84050-BLAK(4000K_L31_120V)

Issue Date: 1/20/2024

Test Information

Test Method: LM-79-2019
Report Number: P735766
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2312-243-1)
Test Lab: INNOVATION CENTER
Issue Date: 1/20/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: Prenalux
Catalog Number: PRLX-UHBS-2436-MV-L84050-BLAK(4000K_L31_120V)
Description: PRENTALUX LARGE HIGH BAY LUMINAIRE WITH BLACK SHADE
LIGHT LEVEL 2 - 31,000 NOMINAL LUMENS
Light Source: 4000K CCT, 80 CRI LEDS
Ballast/Driver: ELECTRONIC DRIVER

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 20002.6 lumens
Efficiency: N/A
Efficacy: 102.6 lumens/watt
Spacing Criteria (0/90/45): 1.31 / 1.31 / 1.23
Luminous Opening: Vertical Cylinder (Dia: 1.71' x H: 1.04')
CIE Type: Direct

Input Watts (W): 195
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P735766

CATALOG NUMBER: PRLX-UHBS-2436-MV-L84050-BLAK(4000K_L31_120V)

Luminous Intensity Polar Plot

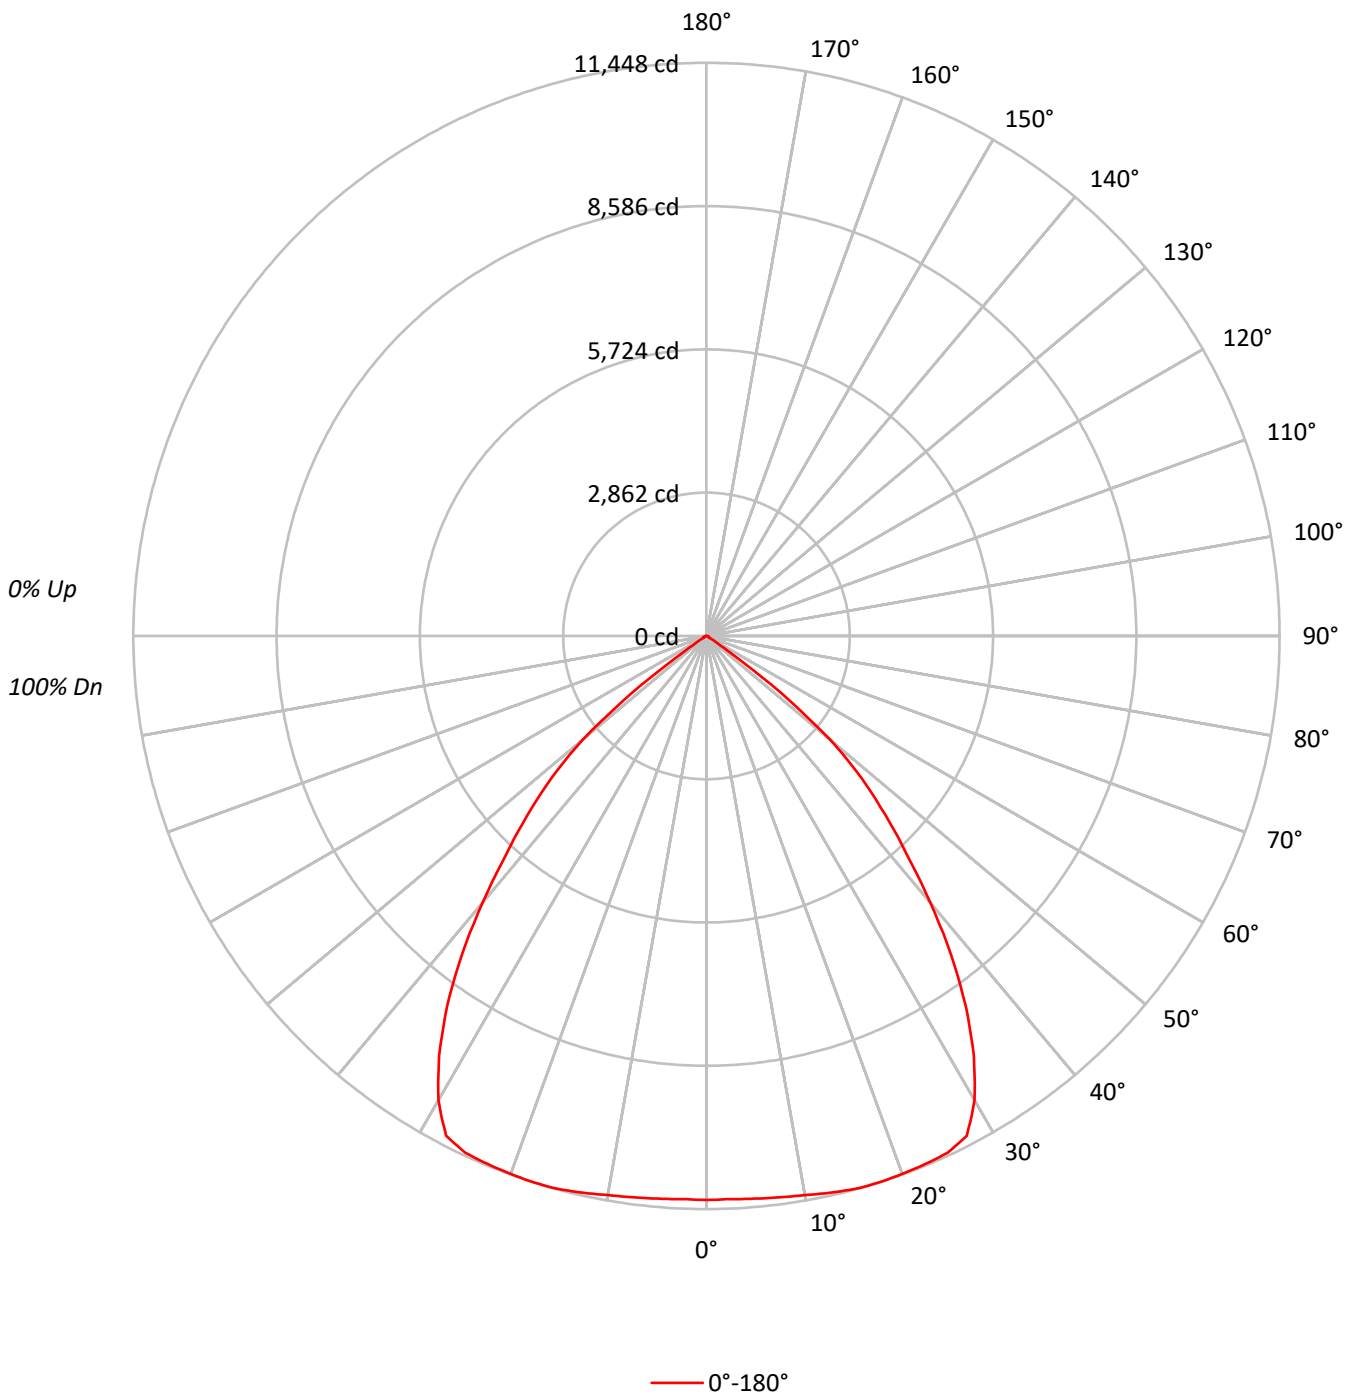



TEST NUMBER: P735766

CATALOG NUMBER: PRLX-UHBS-2436-MV-L84050-BLAK(4000K_L31_120V)

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	113	109	106	104	110	107	105	102	103	101	99		99	98	96		96	95	93	91
2	106	100	95	91	103	98	94	90	95	91	88		92	89	86		89	87	84	83
3	99	91	86	81	97	90	85	80	87	83	79		85	81	78		82	79	76	75
4	93	84	77	72	91	82	76	72	80	75	71		78	74	70		76	72	69	67
5	87	77	70	65	85	76	69	64	74	68	64		72	67	63		70	66	63	61
6	81	71	63	58	79	70	63	58	68	62	58		67	61	57		65	61	57	55
7	76	65	58	53	75	64	58	53	63	57	52		62	56	52		60	56	52	50
8	71	60	53	48	70	60	53	48	58	52	48		57	52	48		56	51	47	46
9	67	56	49	44	66	55	49	44	54	48	44		53	48	44		52	47	44	42
10	63	52	45	41	62	51	45	40	50	44	40		50	44	40		49	44	40	39

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	52906
5°	49805
10°	47568
15°	46033
20°	44552
25°	43331
30°	40108
35°	33525
40°	25806
45°	18862
50°	12268
55°	1965
60°	248
65°	221
70°	210
75°	182
80°	130
85°	65

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 18862 cd/sqm

TEST NUMBER: P735766

CATALOG NUMBER: PRLX-UHBS-2436-MV-L84050-BLAK(4000K_L31_120V)

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	1078.8	5.4
10°-20°	3237.6	16.2
20°-30°	5215.9	26.1
30°-40°	5580.5	27.9
40°-50°	3884.5	19.4
50°-60°	898.4	4.5
60°-70°	53.0	0.3
70°-80°	40.4	0.2
80°-90°	13.6	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	9532.2	47.7
0°-40°	15112.7	75.6
0°-60°	19895.6	99.5
0°-90°	20002.6	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	20002.6	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	11266	
5°	11283	###
15°	11438	3238
25°	11390	5216
35°	9027	5581
45°	5045	3884
55°	506	898
65°	53	53
75°	39	40
85°	12	14
90°	0	

TEST NUMBER: P735766

CATALOG NUMBER: PRLX-UHBS-2436-MV-L84050-BLAK(4000K_L31_120V)

CANDELA DISTRIBUTION (FULL):

	0°
0°	11266
2.5°	11258
5°	11283
7.5°	11309
10°	11341
12.5°	11391
15°	11438
17.5°	11448
20°	11434
22.5°	11419
25°	11390
27.5°	11258
30°	10712
32.5°	9939
35°	9027
37.5°	8030
40°	6952
42.5°	5926
45°	5045
47.5°	4197
50°	3233
52.5°	1895
55°	506
57.5°	86
60°	62
62.5°	56
65°	53
67.5°	50
70°	48
72.5°	44
75°	39
77.5°	33
80°	26
82.5°	19
85°	12
87.5°	6
90°	0

(END OF REPORT)