

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: PrentaLux

Report Number: P735768

Luminaire Tested: PRLX-UHBS-2436-MV-L84050-BLAK(4000K_L31_347V)

Issue Date: 1/20/2024

Test Information

Test Method: LM-79-2019
Report Number: P735768
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2312-243-1)
Test Lab: INNOVATION CENTER
Issue Date: 1/20/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PrentaLux
Catalog Number: PRLX-UHBS-2436-MV-L84050-BLAK(4000K_L31_347V)
Description: PRENTALUX LARGE HIGH BAY LUMINAIRE WITH BLACK SHADE
LIGHT LEVEL 2 - 31,0000 NOMINAL LUMENS
Light Source: 4000K CCT, 80 CRI LEDS
Ballast/Driver: ELECTRONIC DRIVER

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 19965.2 lumens
Efficiency: N/A
Efficacy: 106.7 lumens/watt
Spacing Criteria (0/90/45): 1.31 / 1.31 / 1.23
Luminous Opening: Vertical Cylinder (Dia: 1.71' x H: 1.04')
CIE Type: Direct

Input Watts (W): 187.2
Input Voltage (V): 347
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P735768

CATALOG NUMBER: PRLX-UHBS-2436-MV-L84050-BLAK(4000K_L31_347V)

Luminous Intensity Polar Plot

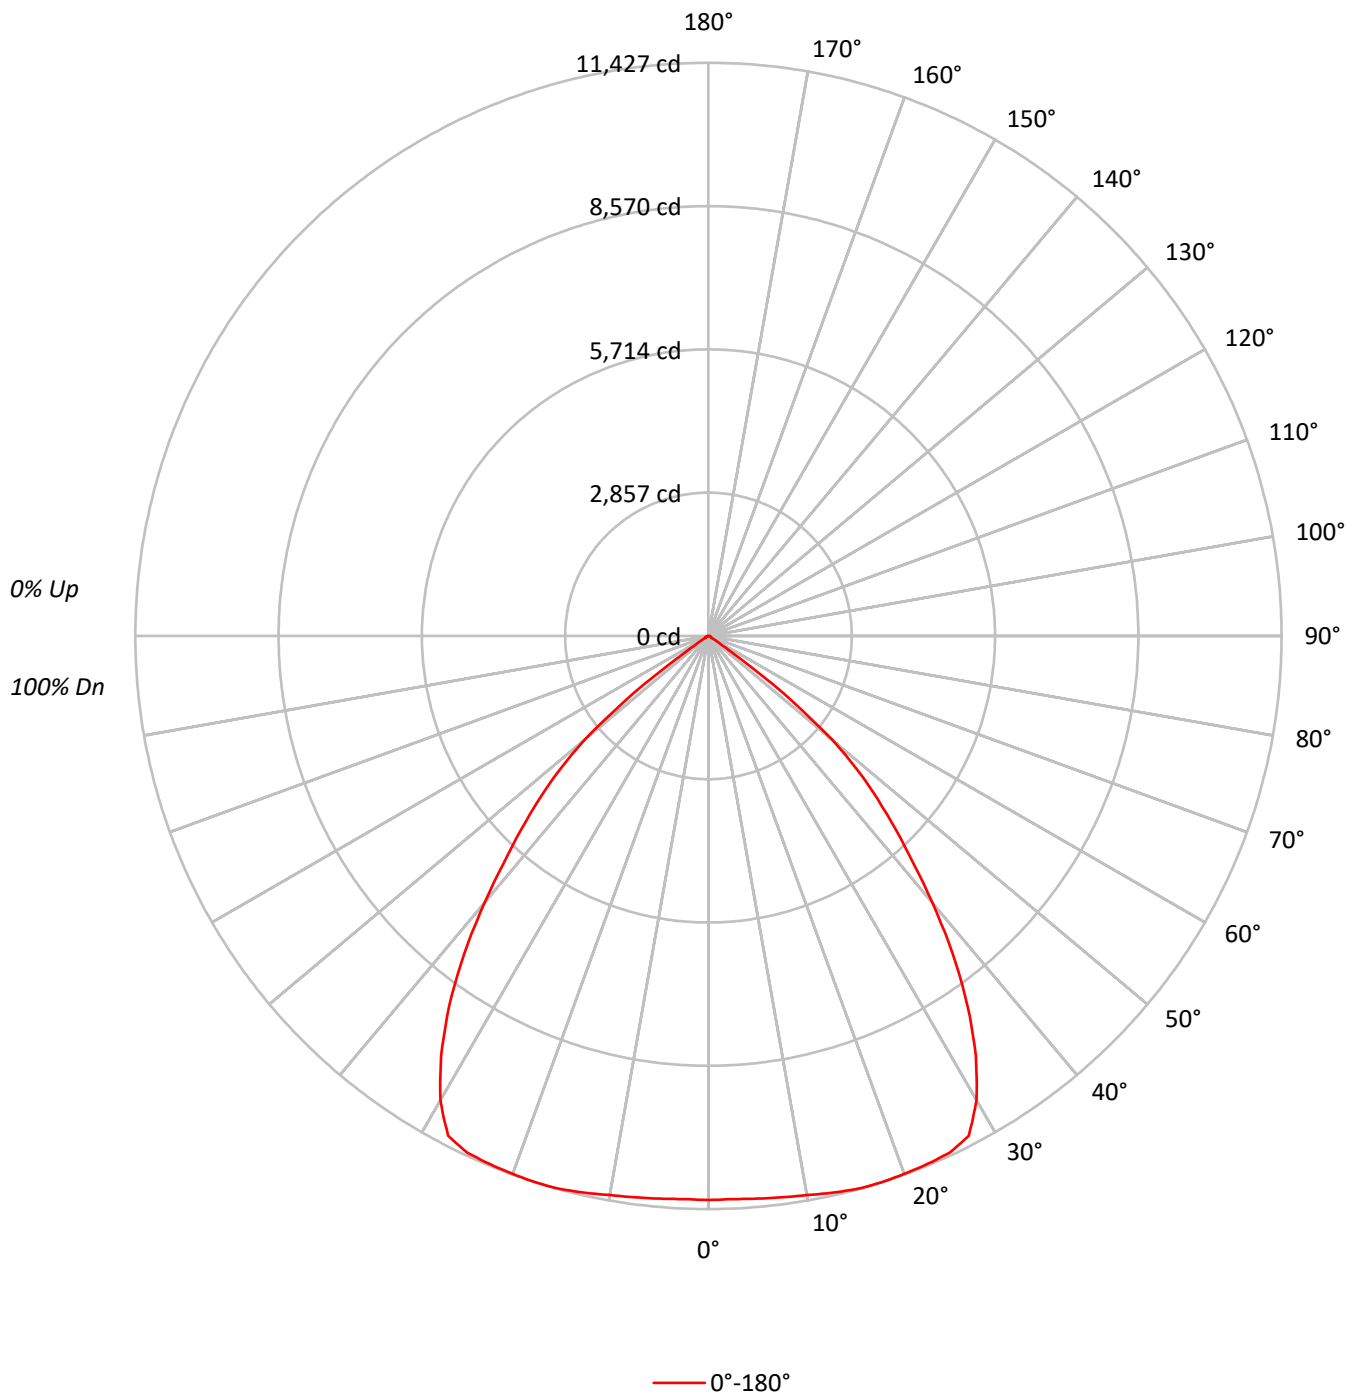



TEST NUMBER: P735768

CATALOG NUMBER: PRLX-UHBS-2436-MV-L84050-BLAK(4000K_L31_347V)

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10				0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0			
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	113	109	106	104	110	107	105	102	103	101	99	99	98	96	96	95	93	91			
2	106	100	95	91	103	98	94	90	95	91	88	92	89	86	89	87	84	83			
3	99	91	86	81	97	90	85	80	87	83	79	85	81	78	82	79	76	75			
4	93	84	77	72	91	82	76	72	80	75	71	78	74	70	76	72	69	67			
5	87	77	70	65	85	76	69	64	74	68	64	72	67	63	70	66	63	61			
6	81	71	63	58	79	70	63	58	68	62	58	67	61	57	65	61	57	55			
7	76	65	58	53	75	64	58	53	63	57	52	62	56	52	60	56	52	50			
8	71	60	53	48	70	60	53	48	58	52	48	57	52	48	56	51	47	46			
9	67	56	49	44	66	55	49	44	54	48	44	53	48	44	52	47	44	42			
10	63	52	45	41	62	51	45	40	50	44	40	50	44	40	49	44	40	39			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	52807
5°	49712
10°	47479
15°	45946
20°	44469
25°	43250
30°	40034
35°	33463
40°	25758
45°	18826
50°	12246
55°	1961
60°	248
65°	221
70°	210
75°	181
80°	130
85°	65

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 18826 cd/sqm

TEST NUMBER: P735768

CATALOG NUMBER: PRLX-UHBS-2436-MV-L84050-BLAK(4000K_L31_347V)

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	1076.8	5.4
10°-20°	3231.5	16.2
20°-30°	5206.1	26.1
30°-40°	5570.1	27.9
40°-50°	3877.2	19.4
50°-60°	896.7	4.5
60°-70°	52.9	0.3
70°-80°	40.3	0.2
80°-90°	13.6	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	9514.4	47.7
0°-40°	15084.5	75.6
0°-60°	19858.4	99.5
0°-90°	19965.2	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	19965.2	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	11245	
5°	11262	###
15°	11417	3232
25°	11369	5206
35°	9010	5570
45°	5036	3877
55°	505	897
65°	53	53
75°	39	40
85°	12	14
90°	0	

TEST NUMBER: P735768

CATALOG NUMBER: PRLX-UHBS-2436-MV-L84050-BLAK(4000K_L31_347V)

CANDELA DISTRIBUTION (FULL):

	0°
0°	11245.0
2.5°	11237.0
5°	11261.9
7.5°	11287.9
10°	11319.8
12.5°	11369.7
15°	11416.6
17.5°	11426.6
20°	11412.7
22.5°	11397.7
25°	11368.7
27.5°	11237.0
30°	10692.0
32.5°	9920.4
35°	9010.1
37.5°	8015.0
40°	6939.0
42.5°	5914.9
45°	5035.6
47.5°	4189.2
50°	3227.0
52.5°	1891.5
55°	505.1
57.5°	85.8
60°	61.9
62.5°	55.9
65°	52.9
67.5°	49.9
70°	47.9
72.5°	43.9
75°	38.9
77.5°	32.9
80°	26.0
82.5°	19.0
85°	12.0
87.5°	6.0
90°	0.0

(END OF REPORT)