

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions  
(formerly Eaton)

Brand: RSA

Report Number: P22187-R2

Luminaire Tested: **CSWIM30SML11**

Issue Date: 3/3/2020

**Test Information**


Test Method: LM-79-08  
Report Number: P22187-R2  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: RSA  
Catalog Number: CSWIM30SML11  
Description: \*\*\*THIS IS A REVISION OF P22187 TO UPDATE CATALOG  
NUMBER\*\*\*COMBOLIGHT ONE 8W LED HEAD, 3 LED UNIT NARROW  
FLOOD DISTRIBUTION, 3000K  
Light Source: (3) 3000K SMT LEDS  
XPG  
Ballast/Driver: (1) MAGTECH HIGH PERFECTION ELECTRONIC DRIVER  
LP1020-12-C700

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 384.2 lumens  
Efficiency: N/A  
Efficacy: 46.3 lumens/watt  
Spacing Criteria (0/90/45): 0.51 / 0.51 / 0.53  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 8.3  
Input Voltage (V): NR  
Input Current (Ain): 0.07098  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: HR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT

TEST NUMBER: P22187-R2  
CATALOG NUMBER: CSWIM30SML11

### Luminous Intensity Polar Plot

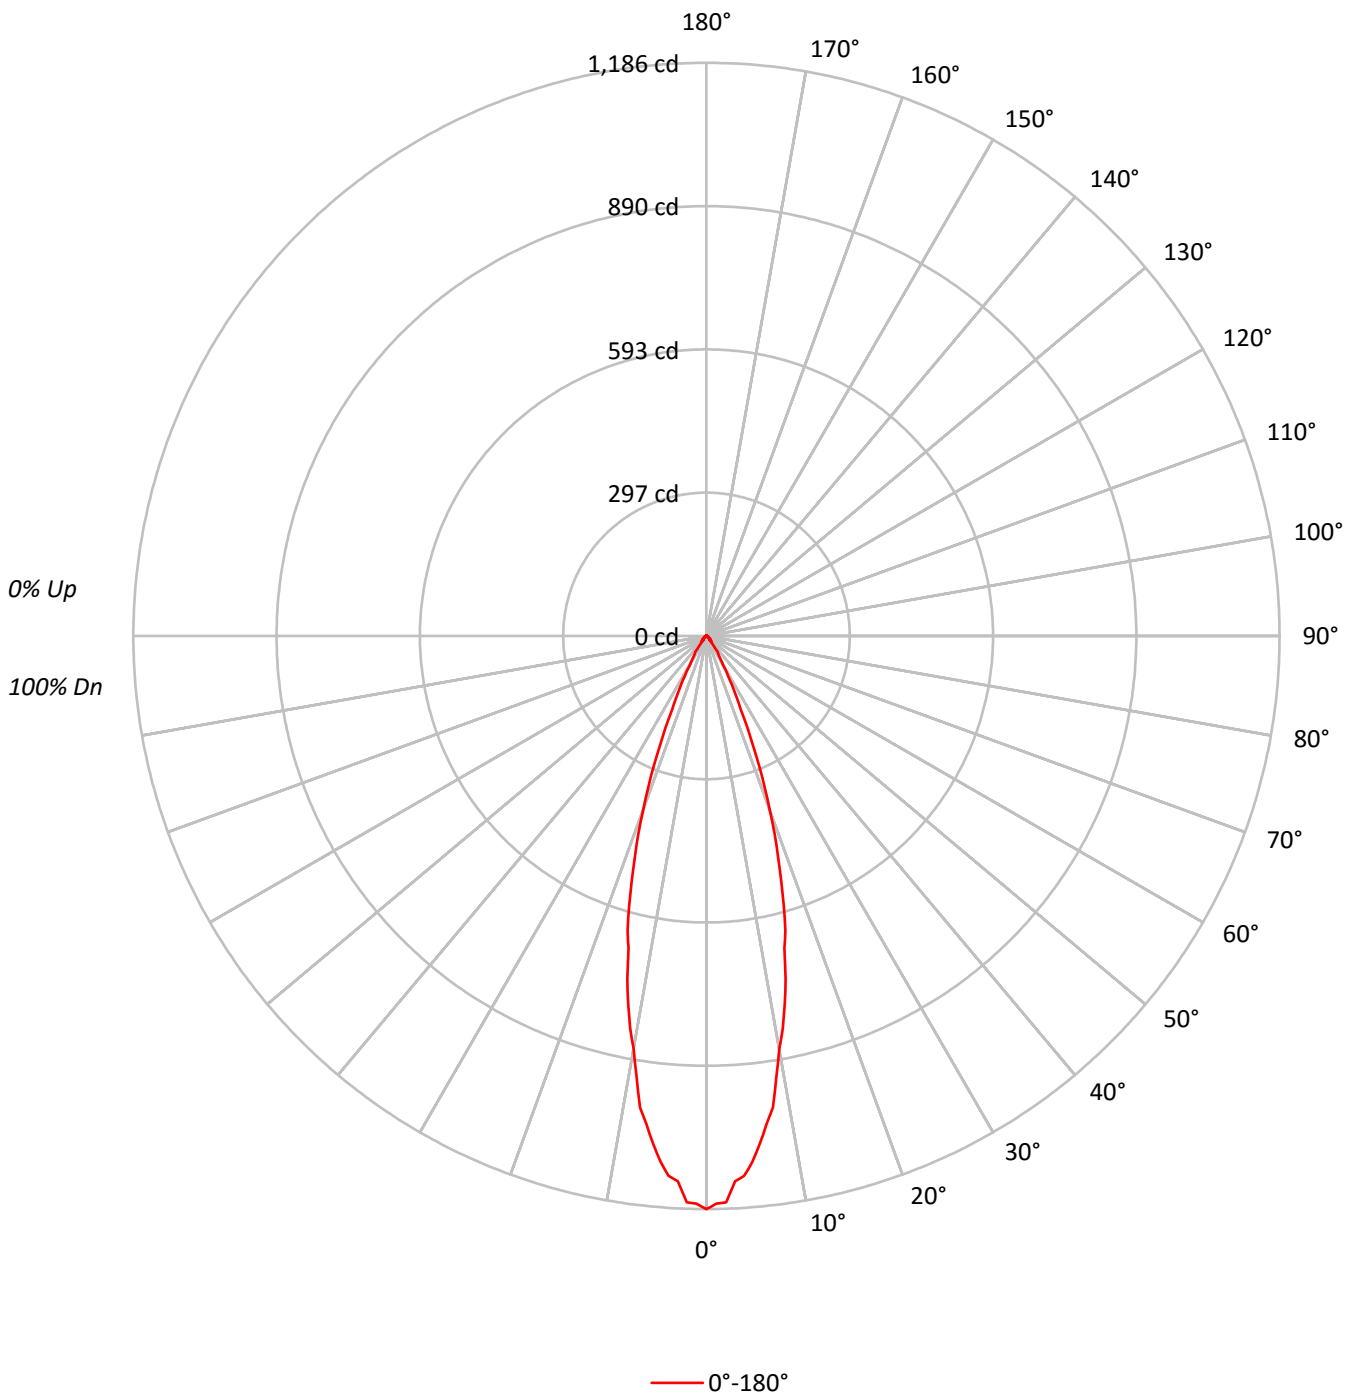



TEST NUMBER: P22187-R2

CATALOG NUMBER: CSWIM30SML11

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	115	112	110	108	112	110	108	107	106	105	103		102	101	100		99	98	97	96
2	110	106	103	100	108	105	102	99	101	99	97		99	97	95		96	94	93	91
3	106	101	97	94	104	100	96	93	97	94	92		95	92	90		93	91	89	88
4	102	96	92	89	101	95	91	88	93	90	87		91	89	86		90	87	85	84
5	99	92	88	84	97	91	87	84	90	86	83		88	85	83		87	84	82	81
6	95	88	84	80	94	88	83	80	86	83	80		85	82	79		84	81	79	78
7	92	85	80	77	91	84	80	77	83	79	76		82	79	76		81	78	76	75
8	89	82	77	74	88	81	77	74	80	76	74		79	76	73		79	75	73	72
9	86	79	74	71	85	78	74	71	78	74	71		77	73	71		76	73	70	69
10	84	76	72	69	83	76	72	69	75	71	68		74	71	68		74	70	68	67

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	260067
5°	240369
10°	193272
15°	143247
20°	89374
25°	40889
30°	16965
35°	10708
40°	2576
45°	0
50°	3753
55°	2294
60°	877
65°	0
70°	0
75°	0
80°	0
85°	2516



TEST NUMBER: P22187-R2  
 CATALOG NUMBER: CSWIM30SML11

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	97.2	25.3
10°-20°	170.7	44.4
20°-30°	85.4	22.2
30°-40°	20.2	5.3
40°-50°	5.3	1.4
50°-60°	3.2	0.8
60°-70°	0.5	0.1
70°-80°	1.3	0.3
80°-90°	0.3	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	353.3	92.0
0°-40°	373.6	97.2
0°-60°	382.1	99.5
0°-90°	384.2	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	384.2	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	1186	
5°	1092	97
15°	631	171
25°	169	85
35°	40	20
45°	0	5
55°	6	3
65°	0	0
75°	0	1
85°	1	0
90°	0	



TEST NUMBER: P22187-R2  
CATALOG NUMBER: CSWIM30SML11

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	1186
1°	1175
2°	1173
3°	1130
4°	1120
5°	1092
6°	1057
7°	1018
8°	986
9°	923
10°	868
11°	827
12°	780
13°	728
14°	666
15°	631
17.5°	504
20°	383
22.5°	269
25°	169
27.5°	112
30°	67
32.5°	47
35°	40
37.5°	9
40°	9
42.5°	15
45°	0
47.5°	3
50°	11
52.5°	1
55°	6
57.5°	1
60°	2
62.5°	0
65°	0
67.5°	1
70°	0
72.5°	4
75°	0
77.5°	1
80°	0
82.5°	0
85°	1
87.5°	0



TEST NUMBER: P22187-R2  
CATALOG NUMBER: CSWIM30SML11

CANDELA DISTRIBUTION (continued):

90° |  $\frac{0^\circ}{0}$

(END OF REPORT)