

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: RSA

Report Number: P219697

Luminaire Tested: **MRZ-1-REC-X-1H-L27-80-FL-UNV-X-STD**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P219697
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P14875)
Test Lab: INNOVATION CENTER (G1)
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: RSA
Catalog Number: MRZ-1-REC-X-1H-L27-80-FL-UNV-X-STD
Description: MRZ INTEGRAL LED DOWNLIGHT
40 DEGREE FLOOD OPTIC, LIGHT LEVEL 1
Light Source: (1) 2700K CCT, 80 CRI LEDS
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 658.1 lumens
Efficiency: N/A
Efficacy: 96.8 lumens/watt
Spacing Criteria (0/90/45): 0.7 / 0.7 / 0.66
Luminous Opening: Circular (Dia: 0.17' x H: 0')
CIE Type: Direct


Input Watts (W): 6.8
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P219697

CATALOG NUMBER: MRZ-1-REC-X-1H-L27-80-FL-UNV-X-STD

Luminous Intensity Polar Plot

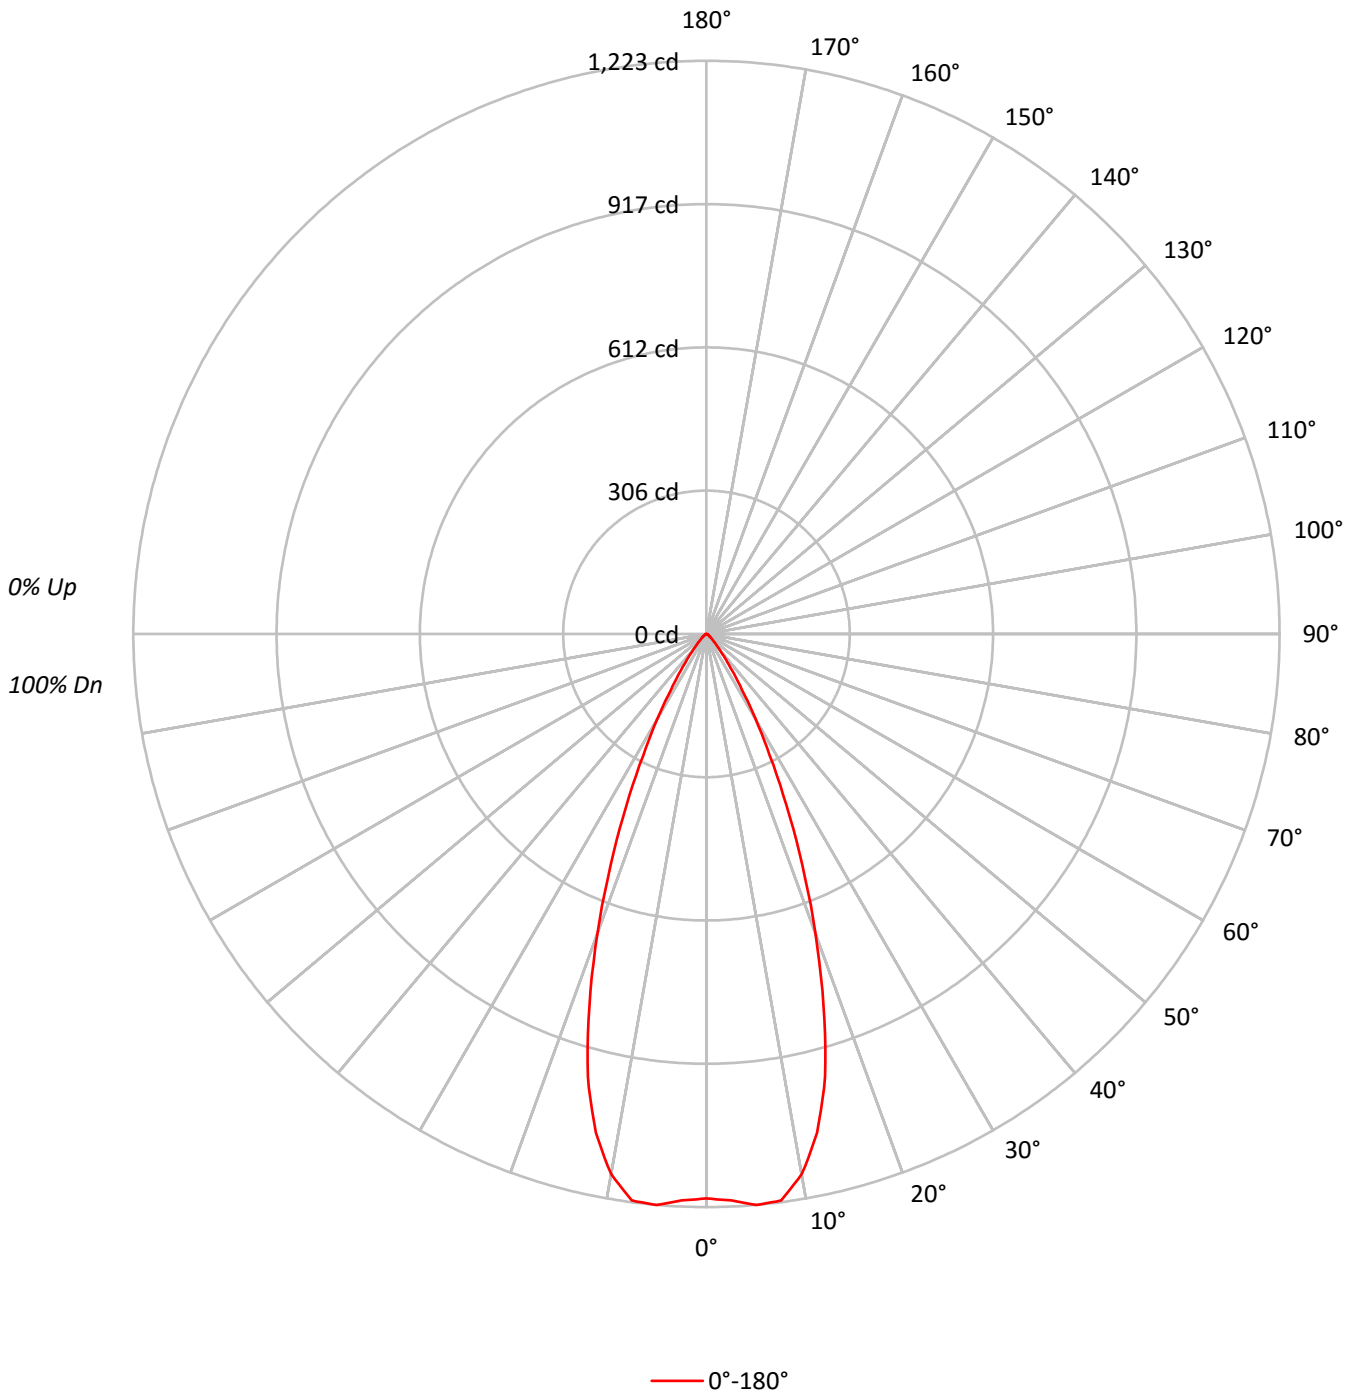



TEST NUMBER: P219697

CATALOG NUMBER: MRZ-1-REC-X-1H-L27-80-FL-UNV-X-STD

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	114	112	109	107	112	110	108	106	106	104	102		102	101	99		98	97	97	95
2	109	105	101	98	107	103	100	97	100	98	95		97	95	93		95	93	91	90
3	105	99	95	91	103	98	94	91	95	92	89		93	90	88		91	88	86	85
4	100	94	89	85	99	93	88	85	91	87	84		89	86	83		87	84	82	81
5	96	89	84	80	95	88	83	80	86	82	79		85	81	79		83	80	78	77
6	92	85	80	76	91	84	79	76	83	78	75		81	77	75		80	77	74	73
7	89	81	76	72	88	80	75	72	79	75	71		78	74	71		77	73	71	69
8	85	77	72	68	84	77	72	68	76	71	68		75	71	68		74	70	67	66
9	82	74	69	65	81	73	68	65	72	68	65		72	68	65		71	67	64	63
10	79	71	66	62	78	70	65	62	69	65	62		69	65	62		68	64	62	61

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	594226
5°	605807
10°	586510
15°	499904
20°	356767
25°	219223
30°	118328
35°	56918
40°	27501
45°	14653
50°	8597
55°	5763
60°	3651
65°	2568
70°	2164
75°	1334
80°	1989
85°	0



TEST NUMBER: P219697

CATALOG NUMBER: MRZ-1-REC-X-1H-L27-80-FL-UNV-X-STD

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	115.3	17.5
10°-20°	263.8	40.1
20°-30°	187.1	28.4
30°-40°	64.6	9.8
40°-50°	17.5	2.7
50°-60°	6.1	0.9
60°-70°	2.5	0.4
70°-80°	1.1	0.2
80°-90°	0.1	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	566.3	86.0
0°-40°	630.8	95.9
0°-60°	654.5	99.5
0°-90°	658.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	658.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1204	
5°	1223	115
15°	979	264
25°	403	187
35°	94	65
45°	21	18
55°	7	6
65°	2	2
75°	1	1
85°	0	0
90°	0	



TEST NUMBER: P219697

CATALOG NUMBER: MRZ-1-REC-X-1H-L27-80-FL-UNV-X-STD

CANDELA DISTRIBUTION (FULL):

0°	
0°	1204.4
2.5°	1209.7
5°	1223.2
7.5°	1219.4
10°	1170.7
12.5°	1090.4
15°	978.7
17.5°	830.9
20°	679.5
22.5°	534.0
25°	402.7
27.5°	292.5
30°	207.7
32.5°	141.0
35°	94.5
37.5°	63.0
40°	42.7
42.5°	29.2
45°	21.0
47.5°	15.0
50°	11.2
52.5°	8.2
55°	6.7
57.5°	5.2
60°	3.7
62.5°	3.0
65°	2.2
67.5°	2.2
70°	1.5
72.5°	1.5
75°	0.7
77.5°	0.7
80°	0.7
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)